


Sensor-switched indoor light

RS PRO Connect 5100 LED

Sensor

EAN 4007841 052911

STEINEL[®]
PROFESSIONAL



LED

30w



36 years (Ø 4,5h / day)

30 W 4206 lm

4000K neutral white



high frequency sensor 360°



max. Ø 10 m



2 - 2000 lux



5 sec - 60 min



shock proof IK07



connectable via bluetooth

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

New diffuser luminaire. New options. The sensor-switched LED diffuser luminaire is sturdy, practical, easy to install, interconnectable via Bluetooth, conveniently set by smartphone, extremely energy-efficient and no problem whatsoever to service. Ideal for refurbishment in multi-storey car parks, basements, industrial and sports buildings, garages and corridors. 360° high-frequency sensor, 10 m reach. With 4200 lm from 30 W in a colour temperature of 4000 K (neutral white). Presence mode rules out any unintentional deactivation.

RS PRO Connect 5100 LED

Sensor


EAN 4007841 052911

Technical specifications

Dimensions (L x W x H)	1370 x 87 x 58 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	30 W
Interconnection	Yes
Luminous flux	4200 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	60000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes
Mechanical scalability	No

Reach, radial	Ø 10 m (79 m²)
Main light adjustable	50 - 100 %
Continuous light	selectable
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function time	10-30 min, all night
Functions	Neighbouring-group function, Presence function, Group parameterisation
Soft light start	No
Impact resistance	IK07
IP-rating	IP66
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, structured
Manufacturer's Warranty	5 years
Settings via	Bluetooth
With remote control	Yes
Version	Sensor
PU1, EAN	4007841052911


Detection Zone

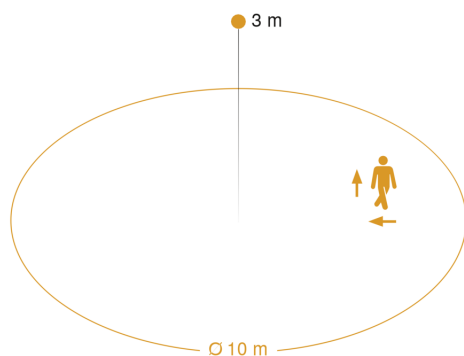

Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

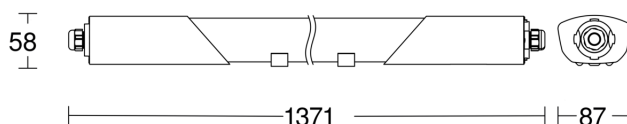

Sensor-switched indoor light


RS PRO Connect 5100 LED

Sensor

EAN 4007841 052911

STEINEL[®]
PROFESSIONAL

Master circuit diagram

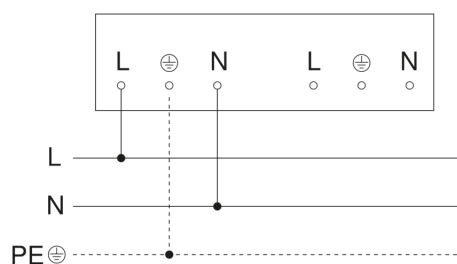

Master/slave and master/master interconnection circuit diagram

