

LED indoor light without sensor

RS PRO P2

warm white

EAN 4007841 056094

Article number 056094



Light source not exchangeable



Control gear not exchangeable

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the version with sensor by cable. Output: 14 W with 1645 lm, 3000 K.

Technical specifications

Dimensions (Ø x H)	320 x 110 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	warm white
PU1, EAN	4007841056094
Colour	white
Installation site	wall, ceiling
Installation	Ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	1645 lm
Total product efficiency	117,5 lm/W

Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Lebensdauer LED nach IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	60.000 h
Lebensdauer LED nach IES TM-21 (L80)	60.000 h
Absicherung B10 (ST)	54
Absicherung B16 (ST)	87
Absicherung C10 (ST)	90
Absicherung C16 (ST)	145
Output	14 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

LED indoor light without sensor

RS PRO P2

warm white

EAN 4007841 056094

Article number 056094



Technical specifications


Colour temperature

3000 K


Starting current, maximum

13 A


Dimension Drawing

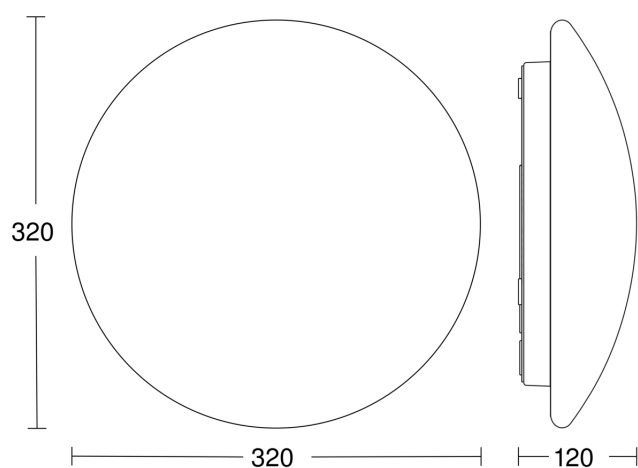

Master circuit diagram



Master/slave interconnection circuit diagram

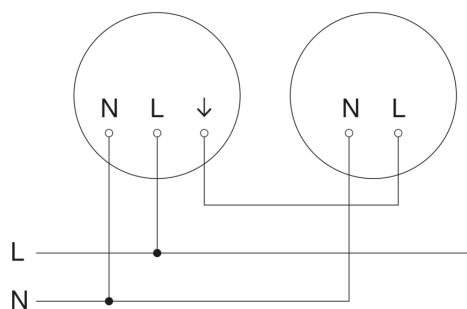

Master/slave interconnection circuit diagram

