


Sensor-switched outdoor light

L 665 LED

V2 Anthracite

EAN 4007841 053949

STEINEL[®]
PROFESSIONAL

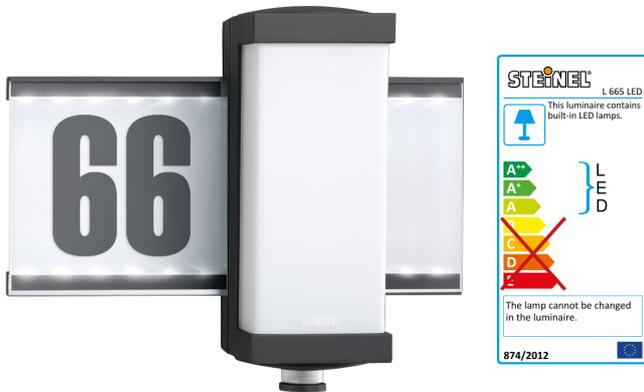

LED



30 years (Ø 4,5h / day)



infrared sensor 360°



max. 7 m



IP44



2 - 1000 lux



5 sec - 15 min



soft light start



10% basic brightness



manual override

Function description

Cool looker. Designer sensor-switched outdoor light L 665 LED, ideal for building walls and entrance areas, 10 W STEINEL LED light system, 360° angle of coverage, reach up to 7 m, basic light-level function and soft light start.

Technical specifications

Dimensions (L x W x H)	122 x 326 x 269 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	10 W
Interconnection	Yes
Luminous flux	750 lm
Efficiency	65 lm/W
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Mechanical scalability	No
Reach, radial	r = 2 m (13 m²)
Reach, tangential	r = 7 m (154 m²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	Yes
Impact resistance	IK07
IP rating	IP44
Protection class	I
Ambient temperature	-20 – 50 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
With remote control	No
Version	Anthracite
PU1, EAN	4007841053949

<https://www.steinel.de>

Sensor-switched outdoor light


L 665 LED

V2 Anthracite

EAN 4007841 053949



Detection Zone

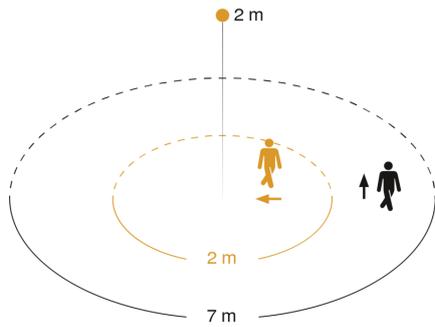


Mögliche Montagehöhe: 1,80 m – 2,50 m


Orange: radial

Schwarz: tangential

Dimension Drawing

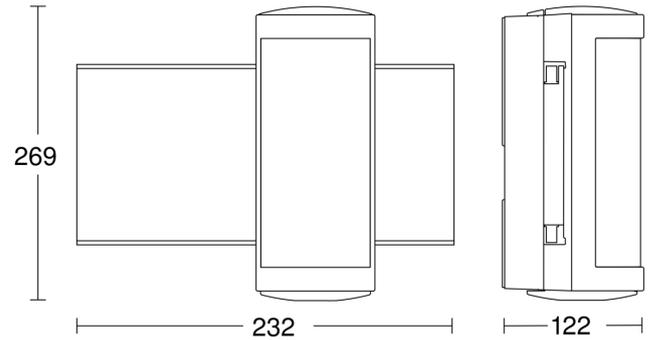

Light Distribution Curve

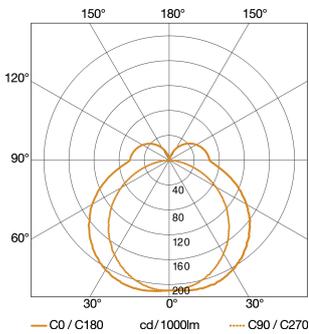

Output	10 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	750 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control