

RS PRO 5100 SC EM

Emergency light

EAN 4007841 079161

Article number 079161



LED

36 years (Ø 4,5h / day)

4000 K

4000K neutral white



high frequency sensor 360°



max. Ø 10 m



emergency light



10 - 100% basic brightness



10 - 100% main light brightness



2 - 2000 lux



5 sec - 60 min



shock proof IK07

Function description

Our engineers agreed: The new damp-proof light should be simple and good. Easy to install and maintain, good in energy efficiency, function and quality. The moisture-proof luminaire the world has been waiting for. Robust, highly functional, child's play to install, wireless to network and ultimately convenient to adjust via smartphone. 360° high-frequency sensor, 10 m range. With 4250 lm at 31 W and 4000 K. No unintentional switch-off thanks to presence mode.

Technical specifications

Dimensions (L x W x H)	1370 x 87 x 58 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bluetooth
Version	Emergency light
PU1, EAN	4007841079161
Colour	grey
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK07
IP-rating	IP65
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, structured
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,41 W

Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function time	1-60 min
Main light adjustable	10 - 100 %
Interconnection	Yes
Interconnection via	Bluetooth
Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Lebensdauer LED nach IEC-62717 (L80)	68.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
Absicherung B10 (ST)	41
Absicherung B16 (ST)	65
Absicherung C10 (ST)	67
Absicherung C16 (ST)	108

RS PRO 5100 SC EM

Emergency light
EAN 4007841 079161
Article number 079161



Technical specifications

Mounting height max.	3,50 m
Electronic scalability	Yes
Transmitter power	< 1 mW
Luminous flux total product	4250 lm
Total product efficiency	137 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3

Basic light level function in per cent	0 – 100 %
Output	31 W
Colour Rendering Index CRI	= 82
Luminous flux, emergency light	706 lm
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	14,8 A
Angle of aperture	160 °

RS PRO 5100 SC EM


Emergency light

EAN 4007841 079161


Article number 079161



Detection Zone

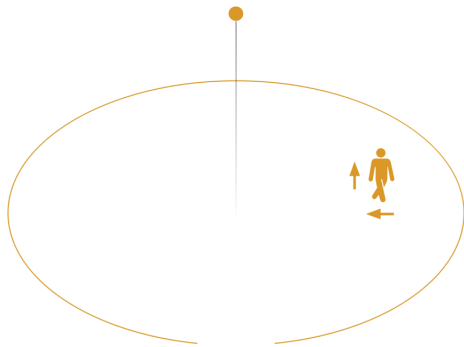


Dimension Drawing

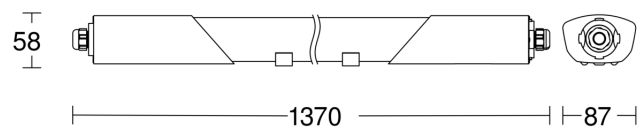

Mögliche Montagehöhe: – 3,50 m

Orange: radial und tangential

Master circuit diagram

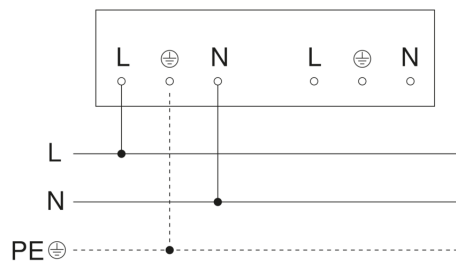

RS PRO 5100 SC EM

Emergency light

EAN 4007841 079161

Article number 079161



Master/slave and master/master interconnection circuit diagram

