

LED indoor light without sensor - Professional Line

RS PRO 5100 C

without motion detector
EAN 4007841 079178
Article number 079178



LED

4000 K



10 - 100% basic
brightness



10 - 100% main light
brightness



shock proof IK07



connectable via
bluetooth

5 years

manufacturer's
warranty steinel-
professional.de/
garantie



CE



ENEC 05

Function description

Our engineers agreed: The new damp-proof light should be simple and good. Easy to install and maintain, good in energy efficiency, function and quality. The moisture-proof luminaire the world has been waiting for. Robust, highly functional, very easy to install. When networked with a sensor variant, functions, e.g. basic light, can be taken over by the latter. With 4250 lm at 31 W and 4000 K.

Technical specifications

Dimensions (L x W x H)	1370 x 87 x 58 mm
With motion detector	No
Manufacturer's Warranty	5 years
Version	without motion detector
PU1, EAN	4007841079178
Colour	grey
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK07
IP-rating	IP65
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, structured
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,45 W
Electronic scalability	Yes

Colour temperature	4000 K
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
Basic light level function	Yes
Basic light level function time	1-60 min
Main light adjustable	10 - 100 %
Interconnection via	Bluetooth
Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Lebensdauer LED nach IEC-62717 (L80)	68.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
Absicherung B10 (ST)	41
Absicherung B16 (ST)	65
Absicherung C10 (ST)	67
Absicherung C16 (ST)	108
Output	31 W
Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

RS PRO 5100 C

without motion detector
EAN 4007841 079178
Article number 079178



Technical specifications

Luminous flux total product	4250 lm
Total product efficiency	137 lm/W


Photobiological safety in accordance with EN 62471

RG1

Starting current, maximum

14,8 A

Dimension Drawing

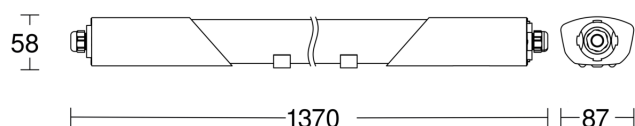

Master/slave interconnection circuit diagram

