



Faretti da incasso di dimensioni ridotte con LED COB integrato.

Caratteristiche:

- Installazione ad incasso su tramite molle o con casseforme (tonda o quadra) per effetto scomparsa.
- Installazione ad incasso con casseforme per muratura e per calcestruzzo.
- Versione Tonda e Quadrata.
- IP 40, (IP 44 Star 1 e 2 a richiesta), IP 65 (Star IP).
- Ottiche disponibili: 18°, 40°, 60°.
- Sorgente luminosa arretrata.
- Schermo satinato (st) o trasparente (tr).
- Temperature di colore: 2700, 3000 e 4000K.
- Finiture disponibili: Bianco, Nero, Oro Satinato, Nickel Matt e Cromo (solo Star IP).
- Dimmerazione: DALI, Push, 1-10V e CASAMBI.
- Gruppo d'emergenza.
- CRI > 90 a richiesta.


Recessed spots of small dimensions with COB LED integrated.

Features:

- Recessed installation on the false ceiling through springs or with recessed boxes (round or square) with effect
- Recessed installation with recessed boxes for wall and for concrete.
- Round and square version.
- IP 40, (IP 44 Star 1 and 2 upon request), IP 65 (Star IP).
- Beam angles available: 18°, 40°, 60°.
- Backward lighting source.
- Satin (st) or transparent (tr) screen.
- Colours temperatures: 2700, 3000 and 4000K.
- Finitures available: White, Black, Satin gold, Nickel Matt and Chrome (just Star IP).
- Dimmer: DALI, Push, 1-10V and CASAMBI.
- Emergency group.
- CRI > 90 upon request.




Star




6690	Star 1
.01	Bianco - <i>White</i>
.02	Nero - <i>Black</i>
.25	Dorato satinato - <i>Golded satin</i>
.32	Nickel satinato - <i>Nickel matt</i>

Color temperature	Optics	Light sources	lm
/W 4000K	/18 /40 /60	LED 6,1W 17,3V 350mA	975lm
/W 4000K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	975lm
/WW 3000K	/18 /40 /60	LED 6,1W 17,3V 350mA	939lm
/WW 3000K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	939lm
/XW 2700K	/18 /40 /60	LED 6,1W 17,3V 350mA	896lm
/XW 2700K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	896lm



0,14 Kg




6691	Star 2
.01	Bianco - <i>White</i>
.02	Nero - <i>Black</i>
.25	Dorato satinato - <i>Golded satin</i>
.32	Nickel satinato - <i>Nickel matt</i>

Color temperature	Optics	Light sources	lm
/W 4000K	/18 /40 /60	LED 6,1W 17,3V 350mA	975lm
/W 4000K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	975lm
/WW 3000K	/18 /40 /60	LED 6,1W 17,3V 350mA	939lm
/WW 3000K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	939lm
/XW 2700K	/18 /40 /60	LED 6,1W 17,3V 350mA	896lm
/XW 2700K	/ST Satinato - Satin	LED 6,1W 17,3V 350mA	896lm



0,16 Kg


IP44 a richiesta. - *IP44 upon request.*




.01 Bianco - *White*




.02 Nero - *Black*



.25 Dorato satinato
Golded satin




.32 Nickel satinato
Nickel matt




.01/ST Satinato - *Satin*


Diagrammi polari - *Polar diagrams*




6690/18 optic 18°




6690/40 optic 40°



6690/60 optic 60°




6690/ST Satinato - *Satin*




CDL polare


IP44 a richiesta. - *IP44 upon request.*




.01 Bianco - *White*



.02 Nero - *Black*



.25 Dorato satinato
Golded satin




.32 Nickel satinato
Nickel matt




.01/ST Satinato - *Satin*


Diagrammi polari - *Polar diagrams*




6691/18 optic 18°



6691/40 optic 40°



6691/60 optic 60°



6691/ST Satinato - *Satin*

*** Drivers ON/OFF**

Cod.	0136/15 350mA	0125 350mA	0128 350mA
6690	1-2	1	1-2
6691	1-2	1	1-2

DIMMABLE drivers

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
1-2	1-2	1-3	1-3
1-2	1-2	1-3	1-3

DIMMABLE drivers
wireless **Casambi**

0718/CASA	0145/CASA
1-2	1-3
1-2	1-3


LED emergency unit

0115/EM Inverter + Battery + LED indicator
1
1


Solo collegamento in serie - *Only serial connection*

I drivers **0136/15**, **0125** e **0128** possono passare dal foro incasso del faretto. Il driver **0136/15** può essere inserito anche con cassaforno montata.


Drivers **0136/15**, **0125** and **0128**, can pass through the recessed hole of the spotlight. The driver **0136/15** can also be inserted with a mounted formwork.



0125
Installazione senza cassaforno
Installation without wall box




0136/15 - 0128
Installazione senza cassaforno
Installation without wall box



0136/15
Installazione con cassaforno **0206** - **0207**
Installation with wall box 0206 - 0207





6692 Star IP

- .01** Bianco - White
- .02** Nero - Black
- .31** Cromato - Chromed

Color temperature	Light sources	lm
/W 4000K	LED 2,5W 16,5V 150mA	432lm
/WW 3000K	LED 2,5W 16,5V 150mA	416lm
/XW 2700K	LED 2,5W 16,5V 150mA	399lm



0,12 Kg

Ø 4 cm.




.01 Bianco - White



.02 Nero - Black




.31 Cromato - Chromed




6693 Star RGB

- .01** Bianco - White
- .02** Nero - Black
- .31** Cromato - Chromed

Light sources
LED 3x250mA



0,14 Kg



Ø 4 cm.



.01 Bianco - White




.02 Nero - Black



.31 Cromato - Chromed

Diagrammi polari - Polar diagrams



6692

Drivers **ON/OFF**

Cod.	0151/150 3,7 cm.
	150mA
6692	1-2

Solo collegamento in serie - Only serial connection

Drivers **RGB**

0164	0167
120W	22W
IN:230V - OUT: 3x24V	

Driver **RGB Casambi**

0164/CASA
120W
IN:230V - OUT: 3x24V

Converter **RGB**

0168
IN:24V - OUT: 3x250 mA 1-5 Zeppelin RGB


0163
IR Sensor

0165
IR Remote controller

0166
Sinc Cable

Solo collegamento in serie - Only serial connection





6695 Star 3

.01	Bianco - <i>White</i>
.02	Nero - <i>Black</i>
.25	Dorato satinato - <i>Gilded satin</i>
.32	Nickel satinato - <i>Nickel matt</i>

	Color temperature	Optics	Light sources	lm
/W	4000K	Satinato - Satin	LED 6,1W 17,3V 350mA	975lm
/WW	3000K	Satinato - Satin	LED 6,1W 17,3V 350mA	939lm
/XW	2700K	Satinato - Satin	LED 6,1W 17,3V 350mA	896lm




0,15 Kg



.01 Bianco - *White*



.02 Nero - *Black*




.25 Dorato satinato
Gilded satin




.32 Nickel satinato
Nickel matt

Diagrammi polari - *Polar diagrams*



6695



6696 Star 4

.01	Bianco - <i>White</i>
.02	Nero - <i>Black</i>
.25	Dorato satinato - <i>Gilded satin</i>
.32	Nickel satinato - <i>Nickel matt</i>


	Color temperature	Optics	Light sources	lm
/W	4000K	/18 /40 /60	LED 6,1W 17,3V 350mA	975lm
/WW	3000K	/ST	Satinato - Satin	975lm
/WW	3000K	/18 /40 /60	LED 6,1W 17,3V 350mA	939lm
/WW	3000K	/ST	Satinato - Satin	939lm
/XW	2700K	/18 /40 /60	LED 6,1W 17,3V 350mA	896lm
/XW	2700K	/ST	Satinato - Satin	896lm




0,18 Kg




.01 Bianco - *White*




.02 Nero - *Black*



.25 Dorato satinato
Gilded satin




.32 Nickel satinato
Nickel matt




.02/ST Satinato - *Satin*

Diagrammi polari - *Polar diagrams*




6696/18

optic 18°




6696/40

optic 40°



6696/60

optic 60°



6696/ST Satinato - Satin

	* Drivers ON/OFF		
Cod.	0136/15	0125	0128
	350mA	350mA	350mA
6695	1-2	1	1-2
6696	1-2	1	1-2

Solo collegamento in serie - Only serial connection

DIMMABLE drivers			
0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
1-2	1-2	1-3	1-3
1-2	1-2	1-3	1-3


DIMMABLE drivers
wireless **Casambi**
0718/CASA **0145/CASA**

1-2	1-3
1-2	1-3


LED emergency unit
0115/EM Inverter + Battery + LED indicator
1
1

I drivers **0136/15**, **0125** e **0128** possono passare dal foro incasso del faretto.

Drivers **0136/15**, **0125** and **0128**, can pass through the recessed hole of the spotlight.









Installazione senza cassaforme
Installation without wall box



Installazione senza cassaforme
Installation without wall box



Installazione su cartongesso: - *Installation in plasterboard:*

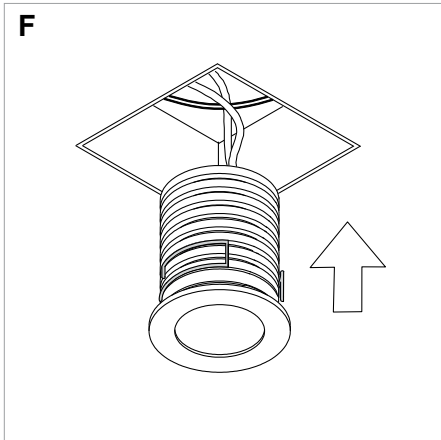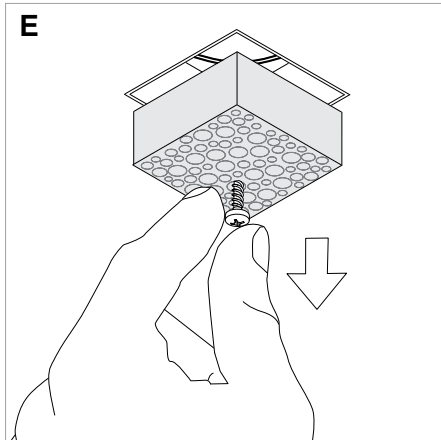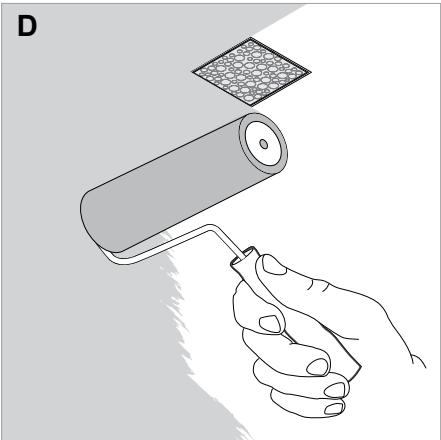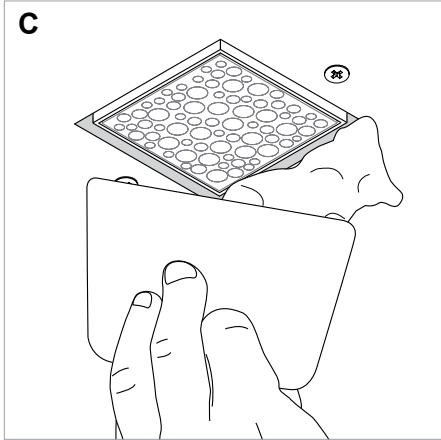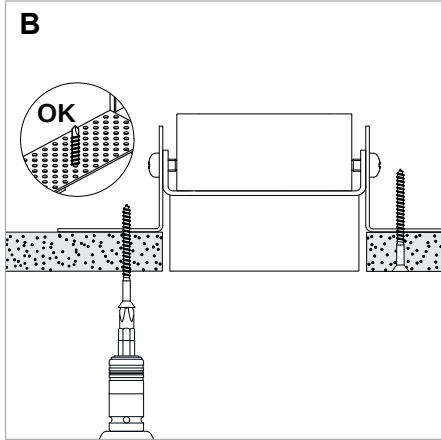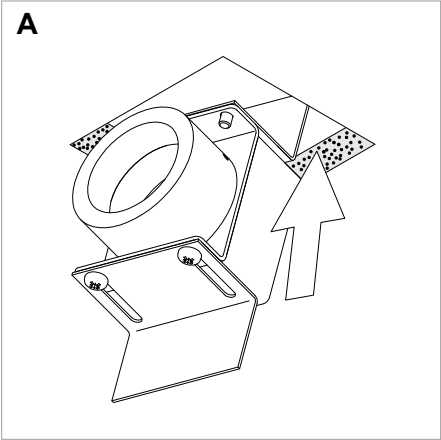

Accessori - Accessories



0206

Cassaforma tonda per installazione in cartongesso a scomparsa
Round wall box for installation in plasterboard false ceiling

.01 Bianco - White
.02 Nero - Black

6,7 cm.




0207

Cassaforma quadrata per installazione in cartongesso a scomparsa
Square wall box for installation in plasterboard false ceiling


.01 Bianco - White
.02 Nero - Black

5,5 x 5,5 cm.



0206 - 0207+

6690 H = 10cm
6692 H = 8cm
6693 H = 8cm










0206




0207

Installazione su muratura: - *Installation in concrete:*

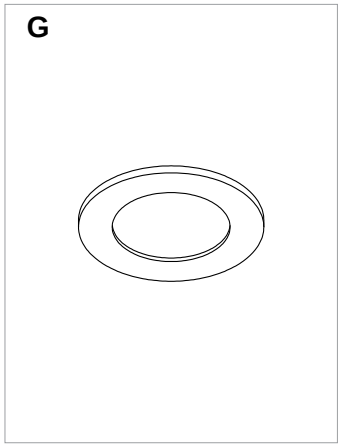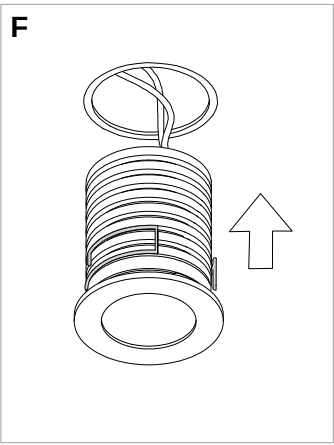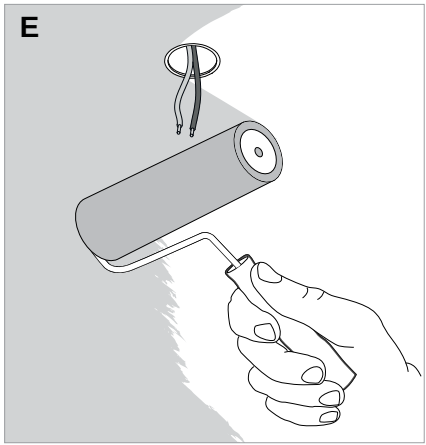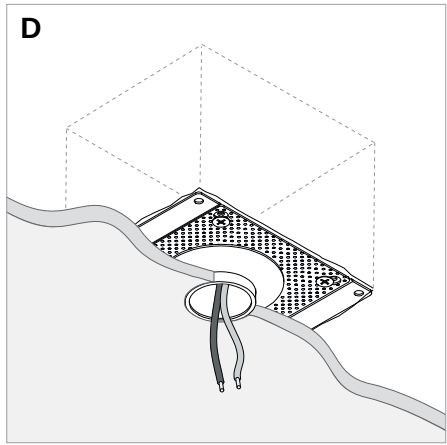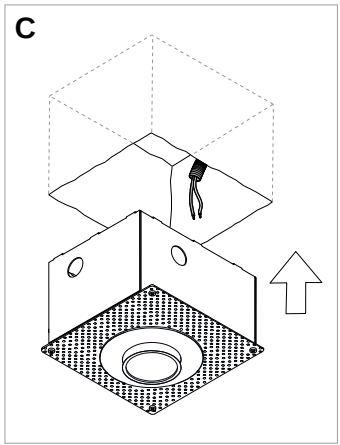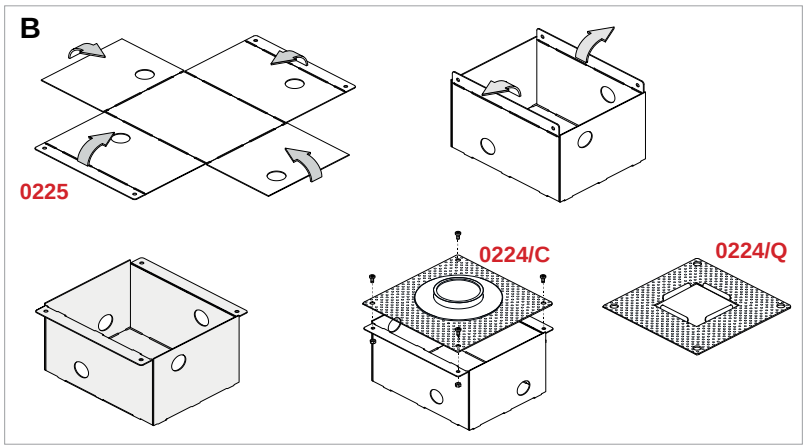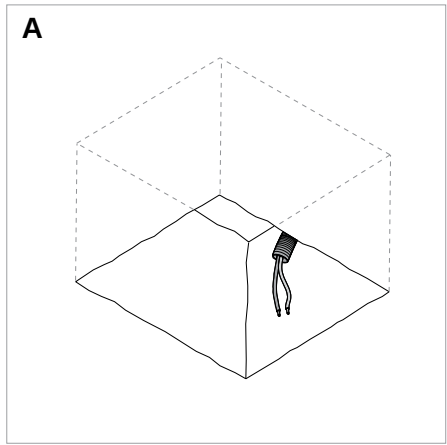

Accessori - Accessories



0225
Cassaforma per muratura
Wall box for concrete
9,5x6,5 - h 9,5 cm









0224/C
Piastra per muratura
Plaster kit
**6690 Star 1
6691 Star 2
6692 Star IP
6693 Star RGB**



0224/Q
Piastra per muratura
Plaster kit
**6696 Star 3
6696 Star 4**



Installazione in calcestruzzo: - *Installation in concrete:*

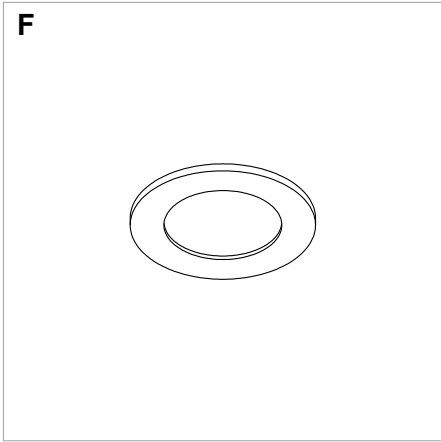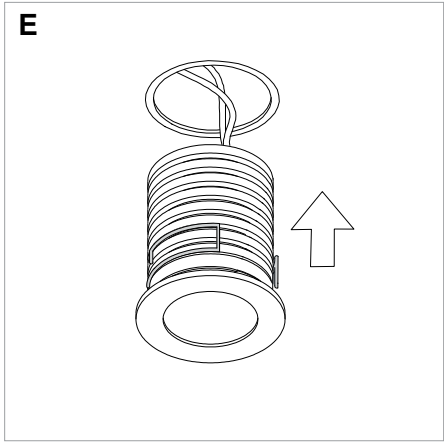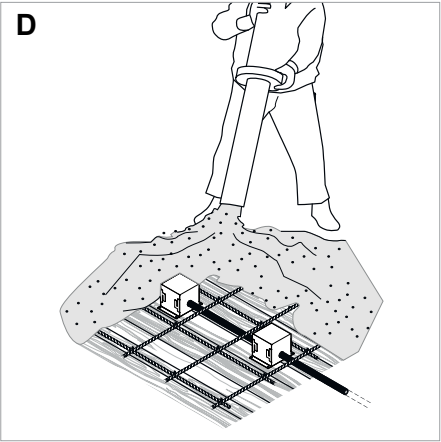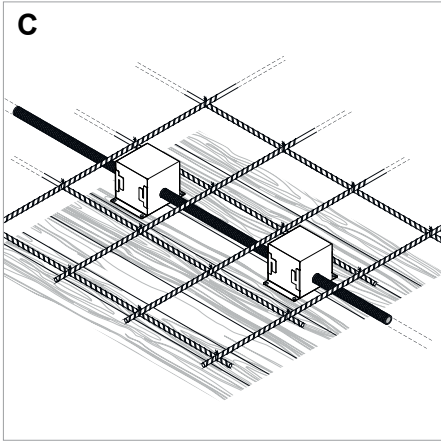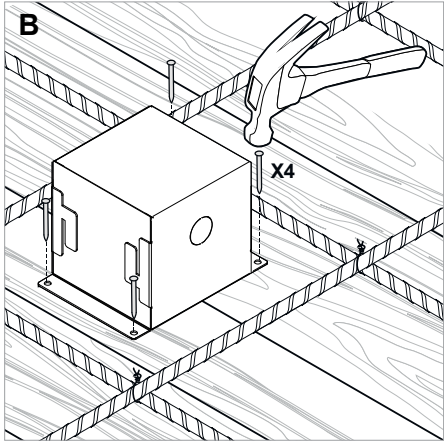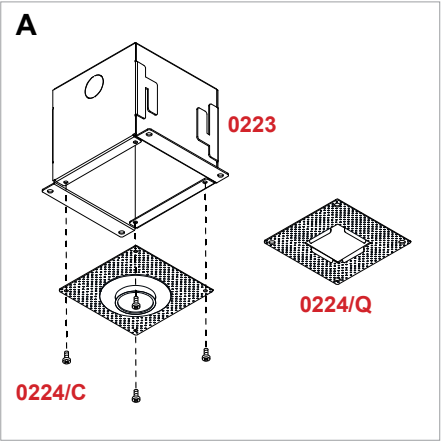


Accessori - Accessories



0223

Cassaforma per calcestruzzo
Wall box for concrete

9x9 - h 9 cm



0224/C


6690 Star 1
6691 Star 2
6692 Star IP
6693 Star RGB



0224/Q


Piastra per muratura
Plaster kit

6696 Star 3
6696 Star 4





EGOLUCE

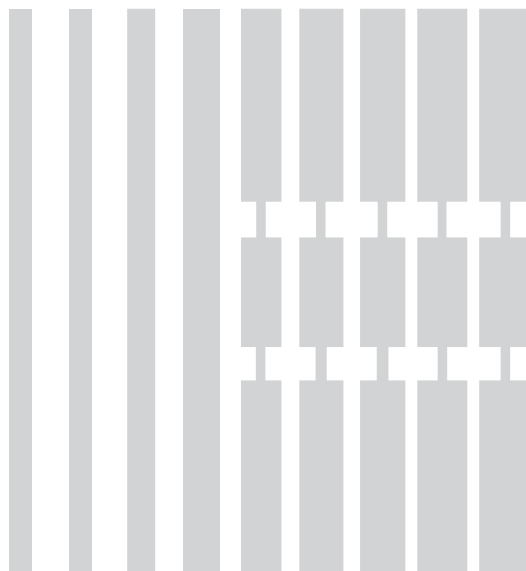

Via I. Newton, 12
20016 Pero - Milano
Italy
Tel. +39 02 3395861

E-mail Italy:
info@egoluce.com

E-mail world:
export@egoluce.com
infoworld@egoluce.com

www.egoluce.com

MADE IN ITALY

EGOLUCE