


Art. no. 565393

Recessed ceiling light Dione IP, 8,5 W, DIM, 3000 K,
white

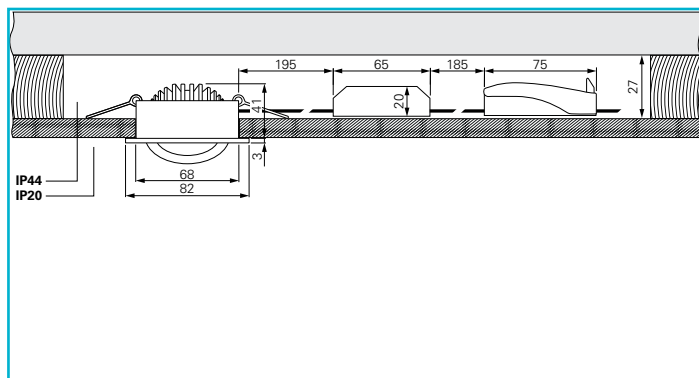

Housing Material	Aluminium
Housing Color	White
Colour of Lens	White
Protection Class	Protection class II/ protective insulation
Rated Input	8.5 W
Rated Input Voltage min./max. Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Primary Connection	Connection box IP20
Control	Leading-edge dimmer, Trailing edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	800 lm
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	30 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	41 mm
Diameter	82 mm
Installation Depth	41 mm
Required Installation Depth	27 mm
Mounting Surface Thickness	9-13 mm
Cut Out Diameter	68 mm

Product weight	163 g
Working Temperature	-20 to 40 °C
Storage Temperature	-20 to 40 °C
IP Protection Class	IP 20, IP 44

Life Time L70 / B50	50000 h
Switching Cycles	25000
Power Consumption	9 kWh/1000h
Energy Efficiency Class	E