


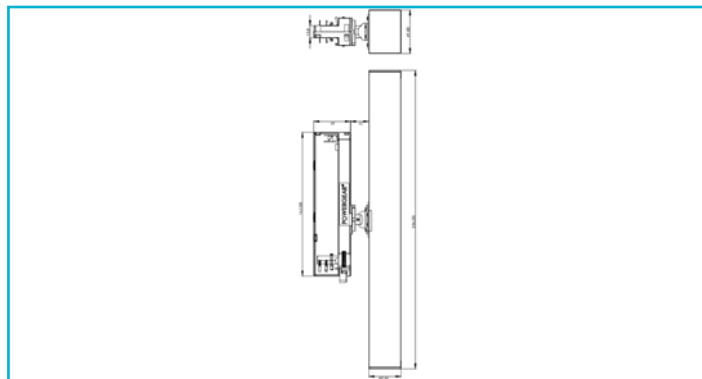

Housing Material	Aluminium	Working Temperature	-5 to 40 °C
Housing Color	White	Storage Temperature	-10 to 40 °C
Material of Lens	Plastic	IP Protection Class	IP 20
Protection Class	Protection class II/protective insulation	Life Time L70 / B50	30000 h
Rated Input	34 W	Switching Cycles	15000
Rated Input Voltage min./max.	220-240 V/AC 50 / 60 Hz	Power Consumption	34 kWh/1000h
Frequency		Energy Efficiency Class	E
Power Supply Unit incl.	Yes		
Connection Type	Adapter		
Control	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	3114 lm		
Luminous Efficiency	91.59 lm/W		
Rated Angle of Reflection	34 Degree		
UGR	16		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	25 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Depth	336 mm		
Width	36 mm		
Height	49 mm		
Product weight	583 g		