
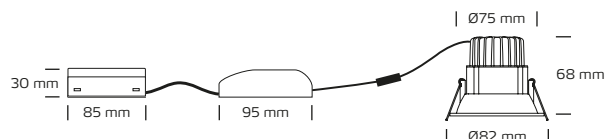
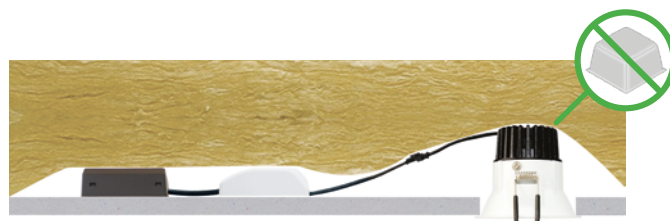


# Velia 10.9W, 2700K

## Technical data

|                               |  |
|-------------------------------|--|
| Voltage                       | 220-240 VAC 50 Hz  |
| System effect                 | 10.9W  |
| Light source                  | CREE LED   |
| Colour temperature            | 2700 Kelvin  |
| Light intensity               | 650 Lumen  |
| Colour rendering              | CRI>95   |
| Expected lifespan             | 30,000 hours L70 B50   |
| Dimmable                      | Yes, trailing edge   |
| Flicker free                  | Yes, according to the new Ecodesign / ErP directive (September 2021) |
| SVM <0.4                      | Yes  |
| PstLM <1                      | Yes  |
| SDCM                          | <3   |
| Beam angle                    | 38°  |
| Carving dimensions            | Ø75 mm   |
| Installation height           | 68 mm  |
| Exterior dimensions           | Ø82 mm   |
| Dimensions driver             | L: 95 mm, W: 45 mm, H: 30 mm   |
| Dimensions connector box      | L: 85 mm, W: 55 mm, H: 30 mm   |
| Possibility of through wiring | Yes, 3G1.5   |
| IP-class                      | IP44 (is intended for installation in areas 1 and 2)                 |
| Insulation class              | Class II   |
| Material                      | Plastic, aluminium, glass  |
| Environment                   | Indoors  |
| Warranty                      | 5 years  |
| Approvals                     | CE   |

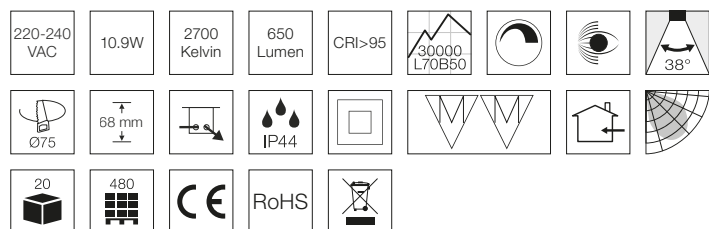

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive (September 2021)
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight, for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

| Item no. | EAN no.       | Colour     | Front design |
|----------|---------------|------------|--------------|
| 31111012 | 5704629000018 | Matt white | Round        |
| 31111092 | 5704629000155 | Matt black | Round        |