
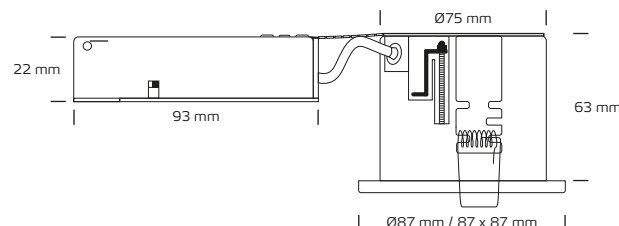
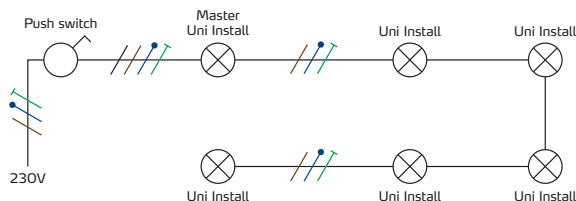


# Master Uni Install 5.5W, 3000K

## Technical data

Voltage	220-240 VAC 50 Hz
System effect	Max. 7.5W LED
Light source	5.5W LED
Colour temperature	3000 Kelvin
Light intensity	400 Lumen
Colour rendering	CRI>90
Expected lifespan	15,000 hours
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<4
Beam angle	38°
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87 mm / 87 x 87 mm
Dimensions driver	L: 93 mm, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1.5
IP-class	IP44
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

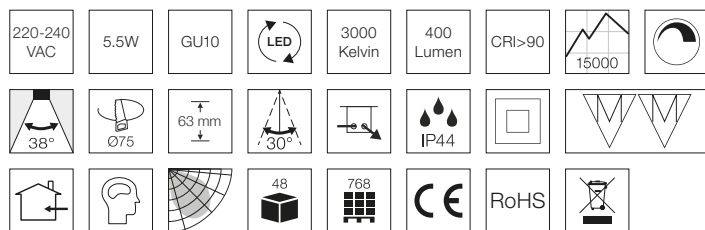

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Built-in LED dimmer (trailing edge)
- Max. load dimmer: 120W
- Adjustable min. setting for dimming
- Memory function for dimming
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
70331013	5704629001602	Matt white	Round
70331023	5704629001633	Brushed aluminium	Round
70331033	5704629001664	Matt white	Square
70331043	5704629001695	Brushed aluminium	Square
70331053	5704629001725	Chrome	Round
70331063	5704629001756	White	Round
70331073	5704629001787	White	Square
70331093	5704629001817	Matt black	Round