


# Low Profile ECO 6W, 2700K


## Technical data

Hole diameter:	Ø75 mm
Height:	33 mm
Front size:	Ø88 mm
Voltage:	220-240VAC 50 Hz
System effect:	6W
Light source:	LED 2700 Kelvin
Light intensity:	420 Lumen
Colour rendering:	CRI>90
SDCM:	<3
Beam angle:	36°
Dimmable:	Yes
Tilt angle:	40°
IP-class:	IP54 (is intended for installation in areas 1 and 2)
Insulation class:	Class II
Possibility of through wiring:	Yes
Operating temperature:	-20° - 45°
Material:	Polycarbonat, aluminium

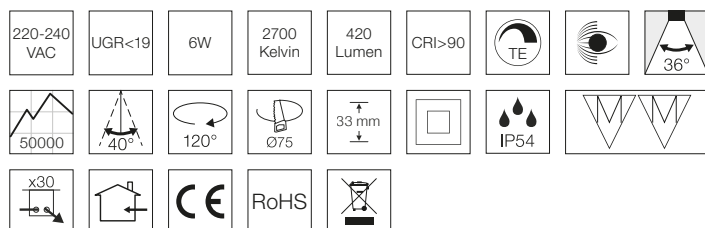


## Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

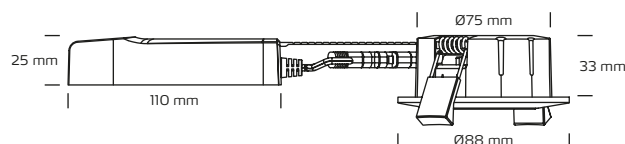

\*The drawing is not drawn to scale

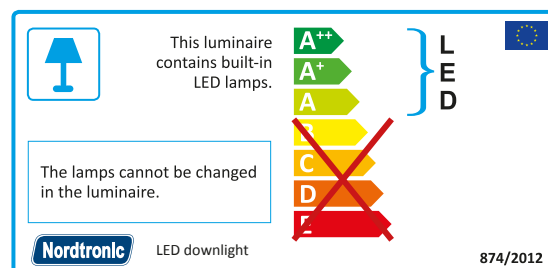

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
32111012	5704629001084	Matt white (RAL 9016)	Round
32111022	5704629001114	Brushed alu	Round
32111002	5704629001145	Grey (RAL 9006)	Round
32111092	5704629001176	Matt black(RAL 9005)	Round