


Low Profile ECO 6W, 3000K


Technical data

Hole diameter:	Ø75 mm
Height:	33 mm
Front size:	Ø88 mm
Voltage:	220-240VAC 50 Hz
System effect:	6W
Light source:	LED 3000 Kelvin
Light intensity:	440 Lumen
Colour rendering:	CRI>90
SDCM:	<3
Beam angle:	36°
Dimmable:	Yes
Tilt angle:	40°
IP-class:	IP54 (is intended for installation in areas 1 and 2)
Insulation class:	Class II
Possibility of through wiring:	Yes
Operating temperature:	-20° - 45°
Material:	Polycarbonat, aluminium

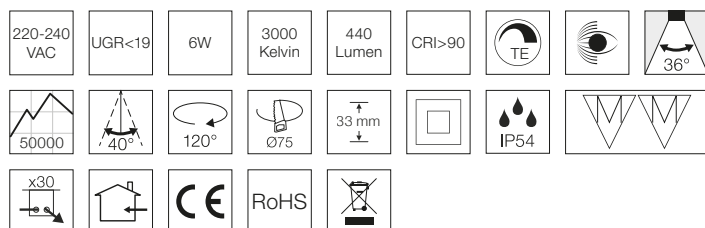


Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

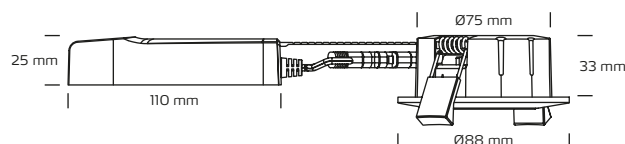

*The drawing is not drawn to scale

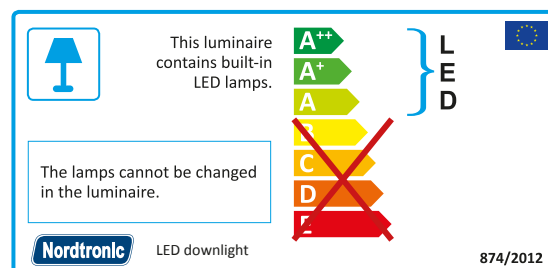

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
32111013	5704629001091	Matt white (RAL 9016)	Round
32111023	5704629001121	Brushed alu	Round
32111003	5704629001152	Grey (RAL 9006)	Round
32111093	5704629001183	Matt black(RAL 9005)	Round