

LED indoor light without sensor - Professional Line

# RS PRO P2 flat

Neutral white

EAN 4007841 069759

Article number 069759



LED

30 years (Ø 4,5h / day)



indoor light



connectable with  
master



IP54



energy saving



plastic free packaging

5 years

manufacturer's  
warranty steinel.de/  
garantie5y



Light source not  
exchangeable



Control gear not  
exchangeable

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 14,1 W with 1684 lm, 4000 K.

## Technical specifications

Dimensions (Ø x H)	322 x 68 mm	Lamp	LED cannot be replaced
With lamp	Yes, STEINEL LED system	Base	without
With motion detector	No	LED cooling system	Passive Thermo Control
Manufacturer's Warranty	5 years	Soft light start	Yes
Version	Neutral white	Main light adjustable	No
PU1, EAN	4007841069759	Interconnection via	Cable
Colour	white	Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Installation site	wall, ceiling	Lebensdauer LED nach IEC-62717 (L80)	73.000 h
Installation	Ceiling	Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Impact resistance	IK03	Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
IP-rating	IP54	Absicherung B10 (ST)	54
Protection class	II	Absicherung B16 (ST)	87
Ambient temperature	-10 – 40 °C	Absicherung C10 (ST)	90
Housing material	Plastic	Absicherung C16 (ST)	145
Cover material	Plastic, opal	Output	14,1 W
Mains power supply	220 – 240 V / 50 – 60 Hz	Colour Rendering Index CRI	= 82
Luminous flux total product	1684 lm		

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

# RS PRO P2 flat

Neutral white

EAN 4007841 069759

Article number 069759



## Technical specifications


Total product efficiency 119 lm/W

Colour temperature 4000 K


Photobiological safety in accordance with EN 62471 RG1

Starting current, maximum 13 A


## Dimension Drawing

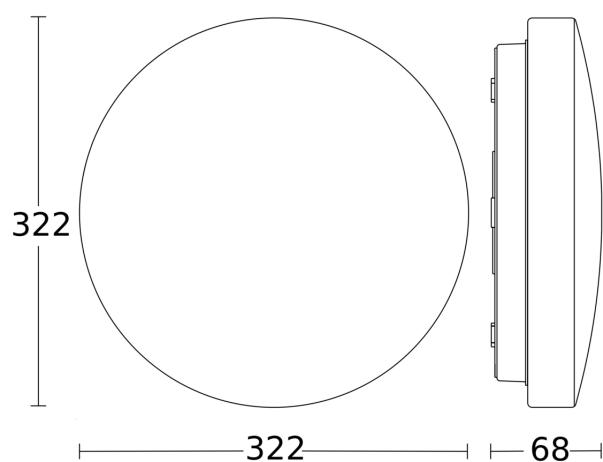

## Master circuit diagram



## Master/slave interconnection circuit diagram

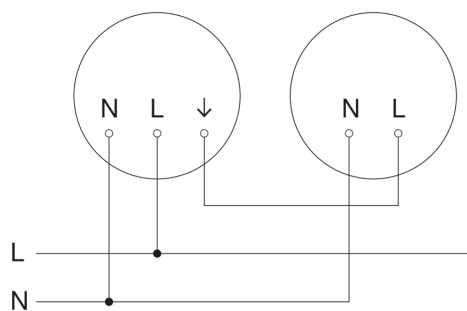

## Master/slave interconnection circuit diagram

