


LINEARlight FLEX Protect POWER

LFP800-G3 | LFP1200-G3 | LFP2000-G3 | LFP3000-G3

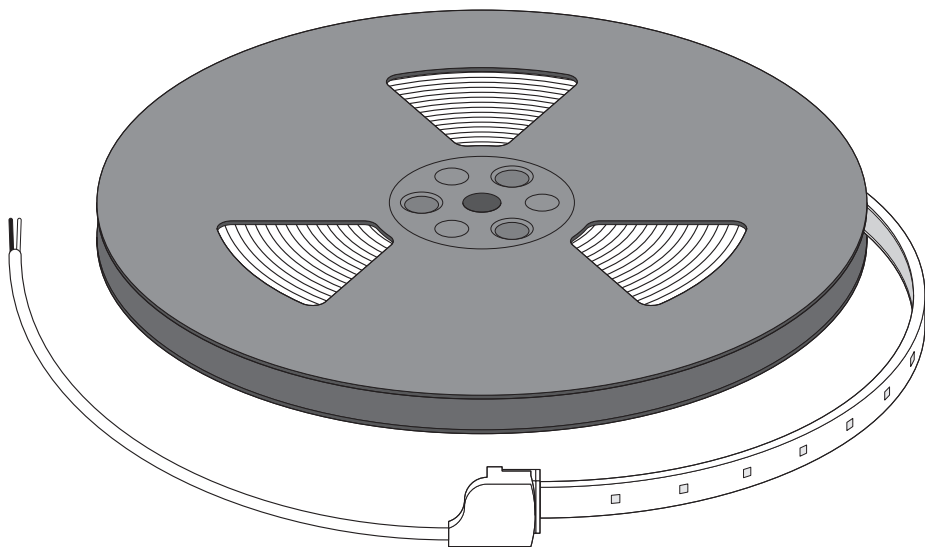

OSRAM

LINEARlight FLEX Protect POWER


	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP800 824	24	7.6	68.0	0.4	3.2	120	≤70°C	-40...+85°C	9000 mm
LFP800 827	24	7.1	63.7	0.3	3.0	120	≤70°C	-40...+85°C	9000 mm
LFP1200 824/827/830	24	10.6	95.4	0.4	4.0	120	≤70°C	-40...+85°C	9000 mm
LFP1200 840	24	8.9	80.1	0.4	3.3	120	≤70°C	-40...+85°C	9000 mm
LFP1200 860	24	8.1	72.9	0.3	3.0	120	≤70°C	-40...+85°C	9000 mm
LFP1200 930/940	24	10.6	95.4	0.4	4.0	120	≤70°C	-40...+85°C	9000 mm
LFP1200 960	24	10.0	90.0	0.4	3.8	120	≤70°C	-40...+85°C	9000 mm
LFP2000 824/827/830	24	17.9	80.6	0.8	3.4	120	≤70°C	-40...+85°C	4500 mm
LFP2000 840	24	15.0	67.5	0.6	2.8	120	≤70°C	-40...+85°C	4500 mm
LFP2000 860	24	13.6	61.2	0.6	2.6	120	≤70°C	-40...+85°C	4500 mm
LFP2000 930/940	24	17.9	80.6	0.8	3.4	120	≤70°C	-40...+85°C	4500 mm
LFP2000 960	24	16.3	73.4	0.7	3.1	120	≤70°C	-40...+85°C	4500 mm
LFP3000 824/827/830	24	28.9	86.7	1.2	3.6	120	≤70°C	-40...+85°C	3000 mm
LFP3000 840	24	23.7	71.1	1.0	3.0	120	≤70°C	-40...+85°C	3000 mm
LFP3000 860	24	21.8	65.4	0.9	2.7	120	≤70°C	-40...+85°C	3000 mm
LFP3000 930/940	24	28.9	86.7	1.2	3.6	120	≤70°C	-40...+85°C	3000 mm
LFP3000 960	24	26.5	79.5	1.1	3.3	120	≤70°C	-40...+85°C	3000 mm

LF-ENDCAP IP67 LP
EAN 4052899 902565


10 x




1x



LF-LTS-2100 SLIM Track
EAN 4008321 978981



OT 50/220-240/24 / EAN 4052899 905566
OT 50/220-240/24 P / EAN 4052899 043510
OT 75/220-240/24 E / EAN 4008321 362476
OT 80/220-240/24 P / EAN 4008321 981684
OT 80/220-240/24 DIM P / EAN 4008321 981677
OT 120/220-240/24 P / EAN 4008321 981707
OT 120/220-240/24 DIM P / EAN 4008321 981691
OT 240/220-240/24 P / EAN 4008321 981721
OT 240/220-240/24 DIM P / EAN 4008321 981714

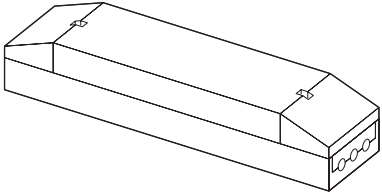


IP67

LF-2PIN IP67 LP
EAN 4052899 125711

5x



1x




5x










LF-2CONN IP67 LP
EAN 4052899 125735







5x

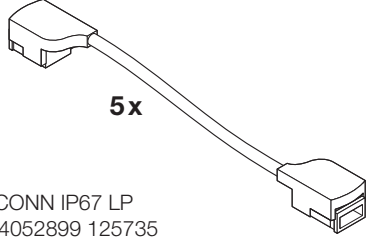










IP67

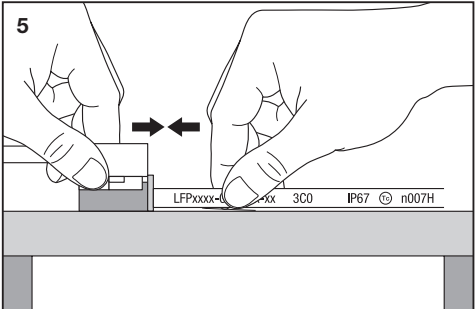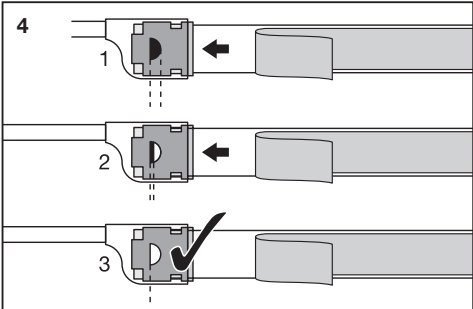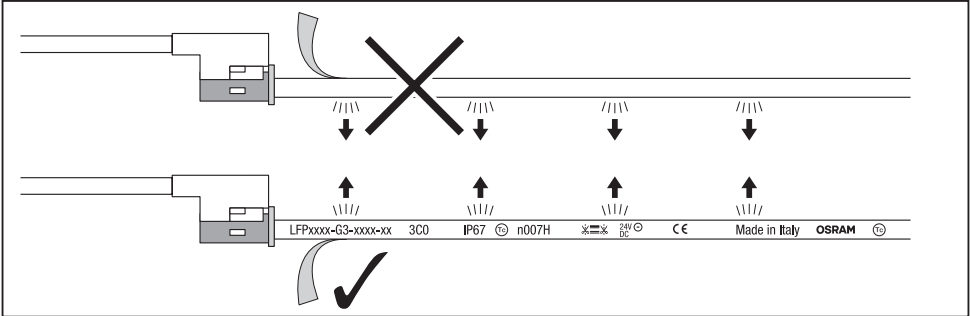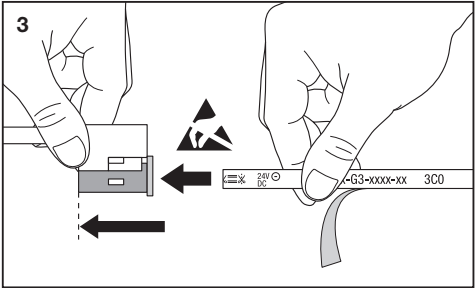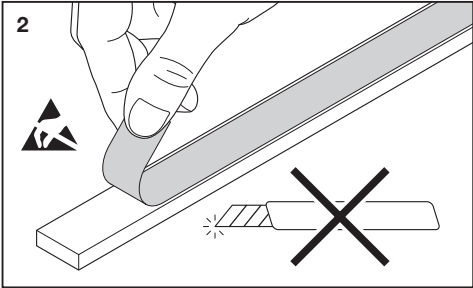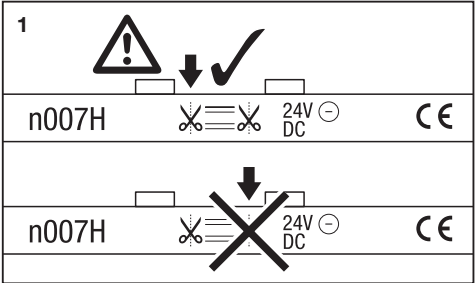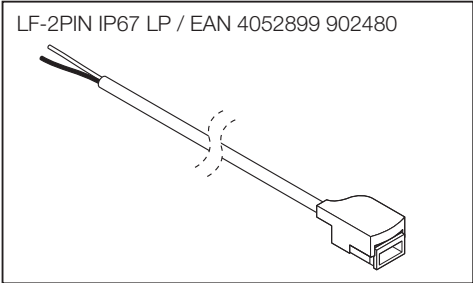


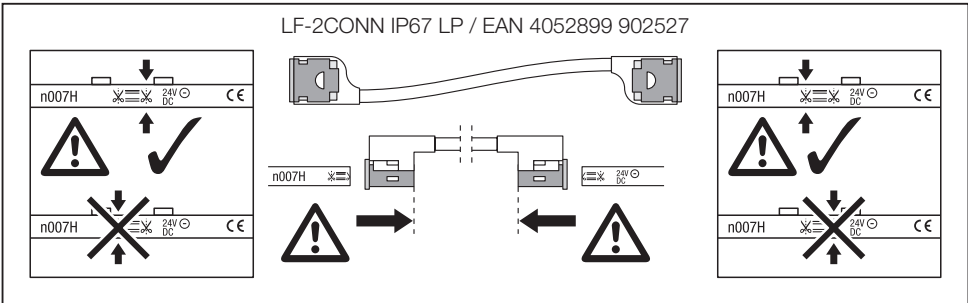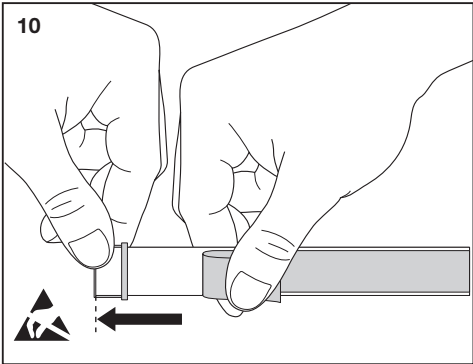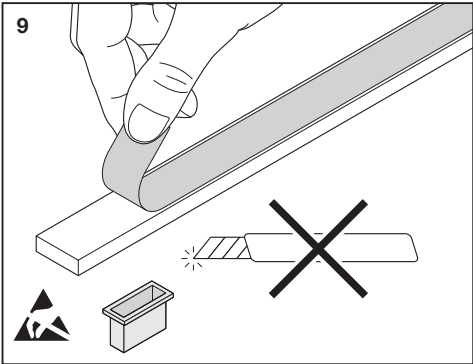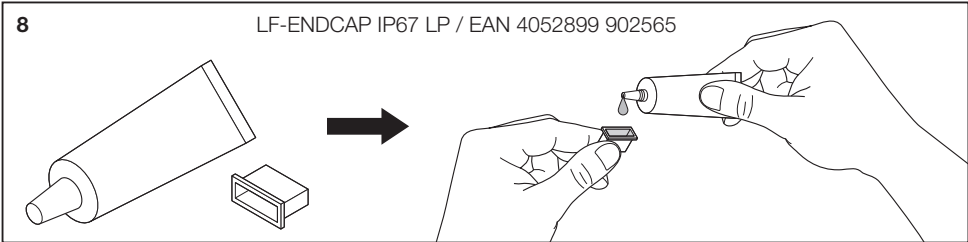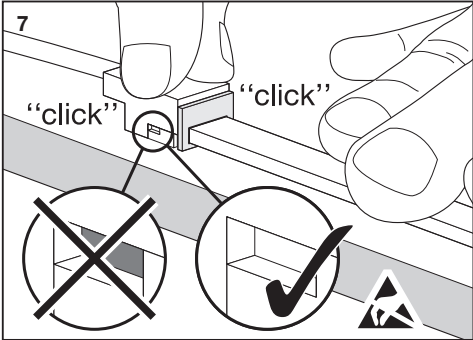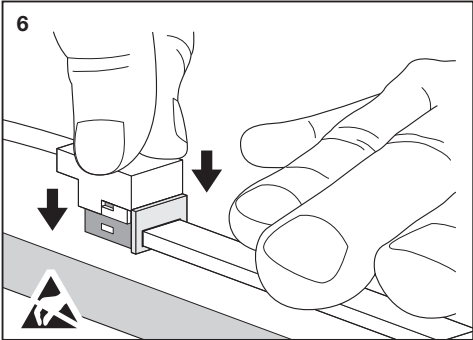

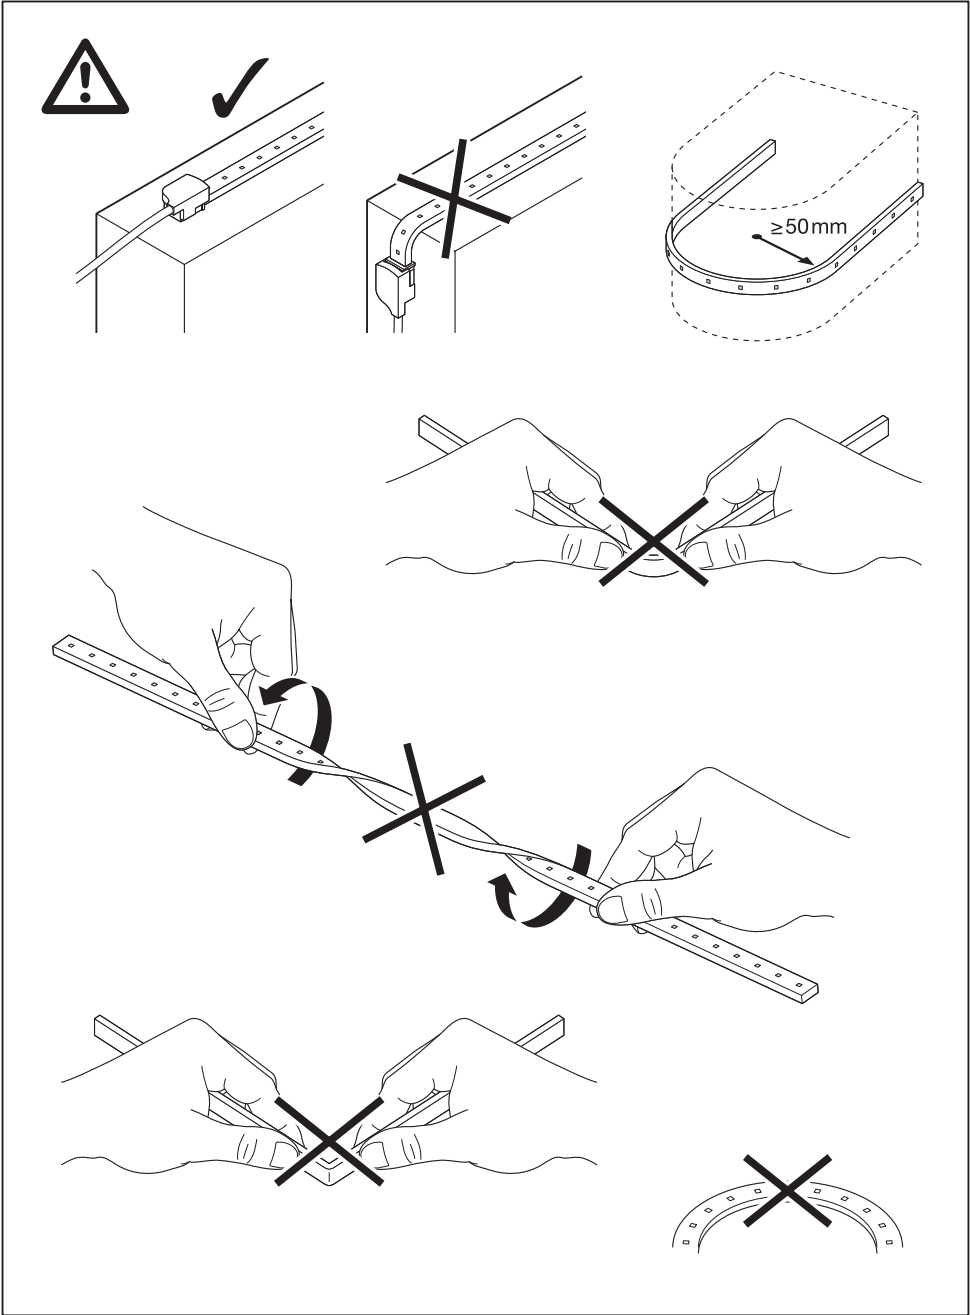


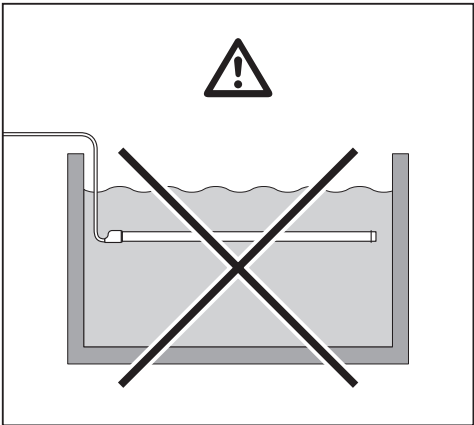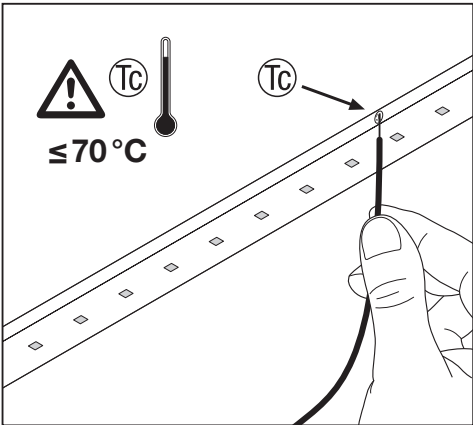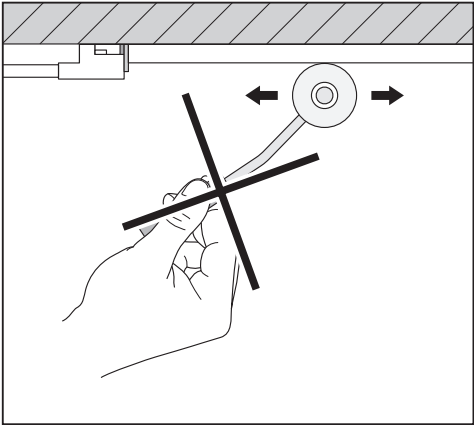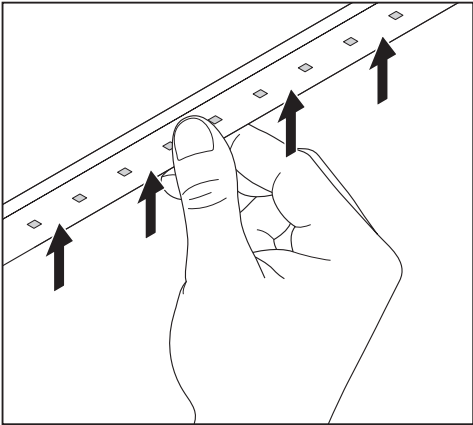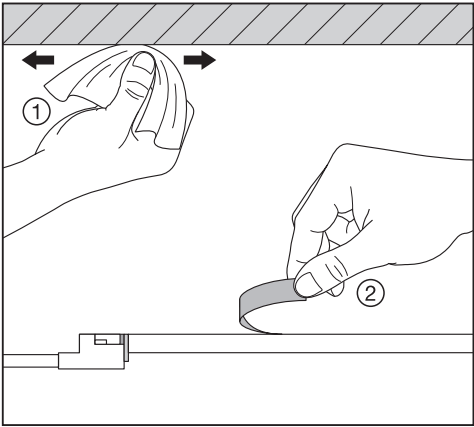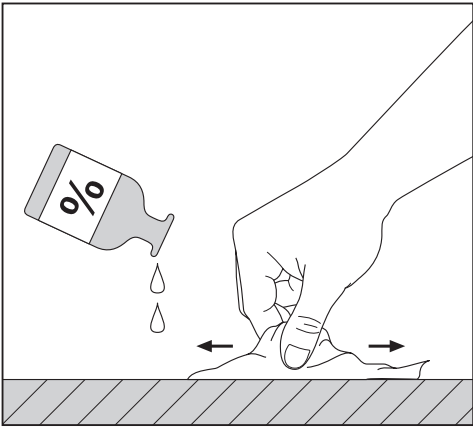

OPTIONAL* (LFP800-G3, LFP1200-G3, LFP2000-G3)

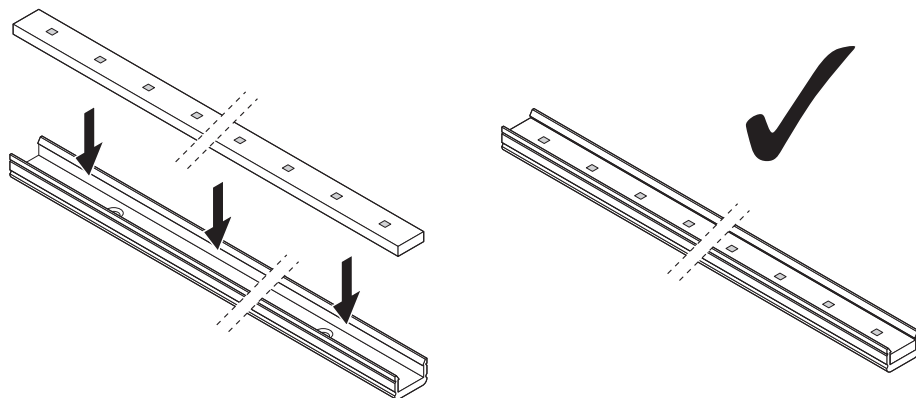

* ① Optional ② En option ③ Opzionale ④ Opcional ⑤ Opcional ⑥ Προαιρετικό ⑦ Optioneel ⑧ Tillval ⑨ Optio ⑩ Alternativ ⑪ Ekstraðstyr ⑫ Voliteľné ⑬ Опціонально ⑭ Opcionális ⑮ Opcjonalnie ⑯ Voliteľné ⑰ Izbirno ⑱ Orsionel ⑲ Opcionalno ⑳ Opțional ㉑ По избор ㉒ Mittekohustuslik ㉓ Pasirenkamas ㉔ Pēc izvēles ㉕ Опція ㉖ Пропонується додатково



Eye Safety RG 1 (low risk)**
EN 62471

** ① Augensicherheit RG 1 (geringes Risiko) ② Risque pour les yeux RG 1 (faible risque) ③ Sicurezza fotobiologica: gruppo di rischio 1 (rischio basso) ④ Protección ocular RG 1 (riesgo bajo) ⑤ Segurança para os olhos RG 1 (baixo risco) ⑥ Κατηγορία ασφαλείας οφθαλμών RG 1 (χαμηλού ρίσκου) ⑦ Veiligheid voor de ogen RG 1 (laag risico) ⑧ Ögonsäkerhet RG 1 (låg risk) ⑨ Silmien turvallisuus RG 1 (vähäinen vaara) ⑩ Øyesikkerhet RG 1 (liten risiko) ⑪ Øjensikkerhed RG 1 (lav risiko) ⑫ Bezpečnost očí RG 1 (riziková skupina 1 - nízké riziko) ⑬ Защита глаз RG 1 (низкий риск) ⑭ Szemészeti biztonság RG1 kategória (alacsony kockázat) ⑮ Bezpieczeństwo dla oczu RG 1 (niskie ryzyko) ⑯ Bezpečnosť očí RG 1 (riziková skupina 1 - nízke riziko) ⑰ Varnost oči RG 1 (nizko tveganje) ⑱ Göz Güvenliği RG 1 (düşük risk) ⑲ Sigurnost očiju RG 1 (nizak rizik) ⑳ Securitatea ochilor RG 1 (risc scăzut) ㉑ Безопасност за очите RG 1 (с нисък риск) ㉒ Ohutus silmadele RG 1 (madal risk) ㉓ Akių sauga RG 1 (maža rizika) ㉔ Acu drošība RG 1 (zems risks līmenis) ㉕ Zaštita očiju RG 1 (mala opasnost) ㉖ Захист очей RG 1 (низький ризик)



IP67



C10449058

G15039122

09.03.18

OSRAM GmbH
Berliner Allee 65
86153 Augsburg
Germany
www.osram.com