

LINEARlight FLEX Uniformity

– LED modules for professional and industrial applications



Product family features

- 24 V LED strips flexible and cuttable, 50 mm cut unit
- Available variants: 800 lm/m 1200 lm/m 2000 lm/m / CRI Ra: 95+ 90+ and 80+
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

Product family benefits

- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc. to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back



Product family datasheet

Technical data

Product description	Electrical data						Photometrical data
	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to	Light color LED
LF800S -G5-822-10 L2	24.0 V	DC	7.2 W	72.10 W	23...25 V	25 V	White
LF800S -G5-825-10 L2	24.0 V	DC	6.7 W	67.10 W	23...25 V	25 V	White
LF800S -G5-827-10 L2	24.0 V	DC	6.3 W	63.00 W	23...25 V	25 V	White
LF800S -G5-830-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF800S -G5-835-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF800S -G5-840-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF800S -G5-850-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF800S -G5-857-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF800S -G5-865-10 L2	24.0 V	DC	6.0 W	60.00 W	23...25 V	25 V	White
LF1200S -G5-822-10 L2	24.0 V	DC	10.6 W	106.00 W	23...25 V	25 V	White
LF1200S -G5-825-10 L2	24.0 V	DC	9.8 W	98.00 W	23...25 V	25 V	White
LF1200S -G5-827-10 L2	24.0 V	DC	9.2 W	92.00 W	23...25 V	25 V	White
LF1200S -G5-830-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF1200S -G5-835-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF1200S -G5-840-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF1200S -G5-850-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF1200S -G5-857-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF1200S -G5-865-10 L2	24.0 V	DC	8.6 W	86.00 W	23...25 V	25 V	White
LF2000S -G5-822-05 L1	24.0 V	DC	18.1 W	90.50 W	23...25 V	25 V	White
LF2000S -G5-825-05 L1	24.0 V	DC	17.3 W	86.50 W	23...25 V	25 V	White
LF2000S -G5-827-05 L1	24.0 V	DC	16.0 W	80.00 W	23...25 V	25 V	White
LF2000S -G5-830-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF2000S -G5-835-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF2000S -G5-840-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF2000S -G5-850-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF2000S -G5-857-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF2000S -G5-865-05 L1	24.0 V	DC	14.6 W	73.00 W	23...25 V	25 V	White
LF800S -G5-922-10 L2	24.0 V	DC	9.0 W	90.00 W	23...25 V	25 V	White
LF800S -G5-925-10 L2	24.0 V	DC	8.0 W	80.00 W	23...25 V	25 V	White
LF800S -G5-927-10 L2	24.0 V	DC	7.5 W	75.00 W	23...25 V	25 V	White
LF800S -G5-930-10 L2	24.0 V	DC	7.5 W	75.00 W	23...25 V	25 V	White
LF800S -G5-935-10 L2	24.0 V	DC	7.5 W	75.00 W	23...25 V	25 V	White
LF800S -G5-940-10 L2	24.0 V	DC	6.7 W	67.00 W	23...25 V	25 V	White
LF800S -G5-950-10 L2	24.0 V	DC	6.7 W	67.00 W	23...25 V	25 V	White
LF800S -G5-957-10 L2	24.0 V	DC	6.7 W	67.00 W	23...25 V	25 V	White
LF800S -G5-965-10 L2	24.0 V	DC	6.7 W	67.00 W	23...25 V	25 V	White
LF1200S -G5-922-10 L2	24.0 V	DC	11.6 W	116.00 W	23...25 V	25 V	White

Product family datasheet

Product description	Electrical data						Photometrical data
	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to	Light color LED
LF1200S -G5-925-10 L2	24.0 V	DC	11.6 W	116.00 W	23...25 V	25 V	White
LF1200S -G5-927-10 L2	24.0 V	DC	10.9 W	109.00 W	23...25 V	25 V	White
LF1200S -G5-930-10 L2	24.0 V	DC	10.9 W	109.00 W	23...25 V	25 V	White
LF1200S -G5-935-10 L2	24.0 V	DC	10.9 W	109.00 W	23...25 V	25 V	White
LF1200S -G5-940-10 L2	24.0 V	DC	9.9 W	99.00 W	23...25 V	25 V	White
LF1200S -G5-950-10 L2	24.0 V	DC	9.9 W	99.00 W	23...25 V	25 V	White
LF1200S -G5-957-10 L2	24.0 V	DC	9.9 W	99.00 W	23...25 V	25 V	White
LF1200S -G5-965-10 L2	24.0 V	DC	9.9 W	99.00 W	23...25 V	25 V	White
LF2000S -G5-925-05 L1	24.0 V	DC	19.6 W	98.00 W	23...25 V	25 V	White
LF2000S -G5-927-05 L1	24.0 V	DC	18.5 W	92.50 W	23...25 V	25 V	White
LF2000S -G5-930-05 L1	24.0 V	DC	18.5 W	92.50 W	23...25 V	25 V	White
LF2000S -G5-935-05 L1	24.0 V	DC	18.5 W	92.50 W	23...25 V	25 V	White
LF2000S -G5-940-05 L1	24.0 V	DC	17.3 W	86.50 W	23...25 V	25 V	White
LF2000S -G5-950-05 L1	24.0 V	DC	17.3 W	86.50 W	23...25 V	25 V	White
LF2000S -G5-957-05 L1	24.0 V	DC	17.3 W	86.50 W	23...25 V	25 V	White
LF2000S -G5-965-05 L1	24.0 V	DC	17.3 W	86.50 W	23...25 V	25 V	White
LF800S -G5-925R-10 L2	24.0 V	DC	8.3 W	83.00 W	23...25 V	25 V	White
LF800S -G5-927R-10 L2	24.0 V	DC	8.3 W	83.00 W	23...25 V	25 V	White
LF800S -G5-930R-10 L2	24.0 V	DC	7.3 W	73.00 W	23...25 V	25 V	White
LF800S -G5-935R-10 L2	24.0 V	DC	7.3 W	73.00 W	23...25 V	25 V	White
LF800S -G5-940R-10 L2	24.0 V	DC	7.3 W	73.00 W	23...25 V	25 V	White
LF800S -G5-950R-10 L2	24.0 V	DC	7.3 W	73.00 W	23...25 V	25 V	White
LF1200S -G5-925R-05 L1	24.0 V	DC	12.0 W	60.00 W	23...25 V	25 V	White
LF1200S -G5-927R-05 L1	24.0 V	DC	12.0 W	60.00 W	23...25 V	25 V	White
LF1200S -G5-930R-05 L1	24.0 V	DC	10.9 W	54.50 W	23...25 V	25 V	White
LF1200S -G5-935R-05 L1	24.0 V	DC	10.9 W	54.50 W	23...25 V	25 V	White
LF1200S -G5-940R-05 L1	24.0 V	DC	10.9 W	54.50 W	23...25 V	25 V	White
LF1200S -G5-950R-05 L1	24.0 V	DC	10.9 W	54.50 W	23...25 V	25 V	White
LF2000S -G5-925R-05 L1	24.0 V	DC	19.5 W	97.50 W	23...25 V	25 V	White
LF2000S -G5-927R-05 L1	24.0 V	DC	19.5 W	97.50 W	23...25 V	25 V	White
LF2000S -G5-930R-05 L1	24.0 V	DC	18.1 W	90.50 W	23...25 V	25 V	White
LF2000S -G5-935R-05 L1	24.0 V	DC	18.1 W	90.50 W	23...25 V	25 V	White
LF2000S -G5-940R-05 L1	24.0 V	DC	18.1 W	90.50 W	23...25 V	25 V	White
LF2000S -G5-950R-05 L1	24.0 V	DC	18.1 W	90.50 W	23...25 V	25 V	White

Product description	Color render- ing index Ra	Lumi- nous flux per meter	Total useful luminous flux	Luminous efficacy	Standard deviation of color matching	Light color (designation)
LF800S -G5-822-10 L2	80	800 lm	8000 lm	111 lm/W	≤3 sdcm	2200 K

Product family datasheet

Product description	Color render- ing index Ra	Lumi- nous flux per meter	Total useful luminous flux	Luminous efficacy	Standard deviation of color matching	Light color (designation)
LF800S -G5-825-10 L2	80	800 lm	8000 lm	119 lm/W	≤3 sdc	2500 K
LF800S -G5-827-10 L2	80	800 lm	8000 lm	127 lm/W	≤3 sdc	2700 K
LF800S -G5-830-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	3000 K
LF800S -G5-835-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	3500 K
LF800S -G5-840-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	4000 K
LF800S -G5-850-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	5000 K
LF800S -G5-857-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	5700 K
LF800S -G5-865-10 L2	80	810 lm	8100 lm	135 lm/W	≤3 sdc	6500 K
LF1200S -G5-822-10 L2	80	1200 lm	12000 lm	113 lm/W	≤3 sdc	2200 K
LF1200S -G5-825-10 L2	80	1200 lm	12000 lm	122 lm/W	≤3 sdc	2500 K
LF1200S -G5-827-10 L2	80	1200 lm	12000 lm	130 lm/W	≤3 sdc	2700 K
LF1200S -G5-830-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	3000 K
LF1200S -G5-835-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	3500 K
LF1200S -G5-840-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	4000 K
LF1200S -G5-850-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	5000 K
LF1200S -G5-857-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	5700 K
LF1200S -G5-865-10 L2	80	1200 lm	12000 lm	140 lm/W	≤3 sdc	6500 K
LF2000S -G5-822-05 L1	80	2000 lm	10000 lm	110 lm/W	≤3 sdc	2200 K
LF2000S -G5-825-05 L1	80	2000 lm	10000 lm	116 lm/W	≤3 sdc	2500 K
LF2000S -G5-827-05 L1	80	2000 lm	10000 lm	125 lm/W	≤3 sdc	2700 K
LF2000S -G5-830-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	3000 K
LF2000S -G5-835-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	3500 K
LF2000S -G5-840-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	4000 K
LF2000S -G5-850-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	5000 K
LF2000S -G5-857-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	5700 K
LF2000S -G5-865-05 L1	80	2000 lm	10000 lm	137 lm/W	≤3 sdc	6500 K
LF800S -G5-922-10 L2	90	800 lm	8000 lm	100 lm/W	≤3 sdc	2200 K
LF800S -G5-925-10 L2	90	800 lm	8000 lm	107 lm/W	≤3 sdc	2500 K
LF800S -G5-927-10 L2	90	800 lm	8000 lm	107 lm/W	≤3 sdc	2700 K
LF800S -G5-930-10 L2	90	800 lm	8000 lm	107 lm/W	≤3 sdc	3000 K
LF800S -G5-935-10 L2	90	800 lm	8000 lm	119 lm/W	≤3 sdc	3500 K
LF800S -G5-940-10 L2	90	800 lm	8000 lm	119 lm/W	≤3 sdc	4000 K
LF800S -G5-950-10 L2	90	800 lm	8000 lm	119 lm/W	≤3 sdc	5000 K
LF800S -G5-957-10 L2	90	800 lm	8000 lm	119 lm/W	≤3 sdc	5700 K
LF800S -G5-965-10 L2	90	800 lm	8000 lm	96 lm/W	≤3 sdc	6500 K
LF1200S -G5-922-10 L2	90	1200 lm	1100 lm	95 lm/W	≤3 sdc	2200 K
LF1200S -G5-925-10 L2	90	1200 lm	12000 lm	103 lm/W	≤3 sdc	2500 K
LF1200S -G5-927-10 L2	90	1200 lm	12000 lm	110 lm/W	≤3 sdc	2700 K
LF1200S -G5-930-10 L2	90	1200 lm	12000 lm	110 lm/W	≤3 sdc	3000 K
LF1200S -G5-935-10 L2	90	1200 lm	12000 lm	110 lm/W	≤3 sdc	3500 K
LF1200S -G5-940-10 L2	90	1200 lm	12000 lm	121 lm/W	≤3 sdc	4000 K
LF1200S -G5-950-10 L2	90	1200 lm	12000 lm	121 lm/W	≤3 sdc	5000 K

Product family datasheet

Product description	Color render- ing index Ra	Lumi- nous flux per meter	Total useful luminous flux	Luminous efficacy	Standard deviation of color matching	Light color (designation)
LF1200S -G5-957-10 L2	90	1200 lm	12000 lm	121 lm/W	≤3 sdc	5700 K
LF1200S -G5-965-10 L2	90	1200 lm	12000 lm	121 lm/W	≤3 sdc	6500 K
LF2000S -G5-925-05 L1	90	2000 lm	10000 lm	102 lm/W	≤3 sdc	2500 K
LF2000S -G5-927-05 L1	90	2000 lm	10000 lm	108 lm/W	≤3 sdc	2700 K
LF2000S -G5-930-05 L1	90	2000 lm	10000 lm	108 lm/W	≤3 sdc	3000 K
LF2000S -G5-935-05 L1	90	2000 lm	10000 lm	108 lm/W	≤3 sdc	3500 K
LF2000S -G5-940-05 L1	90	2000 lm	10000 lm	116 lm/W	≤3 sdc	4000 K
LF2000S -G5-950-05 L1	90	2000 lm	10000 lm	116 lm/W	≤3 sdc	5000 K
LF2000S -G5-957-05 L1	90	2000 lm	10000 lm	116 lm/W	≤3 sdc	5700 K
LF2000S -G5-965-05 L1	90	2000 lm	10000 lm	116 lm/W	≤3 sdc	6500 K
LF800S -G5-925R-10 L2	95	800 lm	8000 lm	96 lm/W	≤3 sdc	2500 K
LF800S -G5-927R-10 L2	95	800 lm	8000 lm	96 lm/W	≤3 sdc	2700 K
LF800S -G5-930R-10 L2	95	800 lm	8000 lm	110 lm/W	≤3 sdc	3000 K
LF800S -G5-935R-10 L2	95	800 lm	8000 lm	110 lm/W	≤3 sdc	3500 K
LF800S -G5-940R-10 L2	95	800 lm	8000 lm	110 lm/W	≤3 sdc	4000 K
LF800S -G5-950R-10 L2	95	800 lm	8000 lm	110 lm/W	≤3 sdc	5000 K
LF1200S -G5-925R-05 L1	95	1200 lm	6000 lm	100 lm/W	≤3 sdc	2500 K
LF1200S -G5-927R-05 L1	95	1200 lm	6000 lm	100 lm/W	≤3 sdc	2700 K
LF1200S -G5-930R-05 L1	95	1200 lm	6000 lm	110 lm/W	≤3 sdc	3000 K
LF1200S -G5-935R-05 L1	95	1200 lm	6000 lm	110 lm/W	≤3 sdc	3500 K
LF1200S -G5-940R-05 L1	95	1200 lm	6000 lm	110 lm/W	≤3 sdc	4000 K
LF1200S -G5-950R-05 L1	95	1200 lm	6000 lm	110 lm/W	≤3 sdc	5000 K
LF2000S -G5-925R-05 L1	95	2000 lm	10000 lm	103 lm/W	≤3 sdc	2500 K
LF2000S -G5-927R-05 L1	95	2000 lm	10000 lm	103 lm/W	≤3 sdc	2700 K
LF2000S -G5-930R-05 L1	95	2000 lm	10000 lm	110 lm/W	≤3 sdc	3000 K
LF2000S -G5-935R-05 L1	95	2000 lm	10000 lm	110 lm/W	≤3 sdc	3500 K
LF2000S -G5-940R-05 L1	95	2000 lm	10000 lm	110 lm/W	≤3 sdc	4000 K
LF2000S -G5-950R-05 L1	95	2000 lm	10000 lm	110 lm/W	≤3 sdc	5000 K

Product description	Light technical data					LED module information
	LED pitch	Beam angle	Rated beam angle (half peak value)	Starting time	Warm-up time (60 %)	Number of LEDs per meter
LF800S -G5-822-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-825-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-827-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-830-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-835-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-840-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-850-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-857-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140

Product family datasheet

Product description	Light technical data					LED module information
	LED pitch	Beam angle	Rated beam angle (half peak value)	Starting time	Warm-up time (60 %)	Number of LEDs per meter
LF800S -G5-865-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-822-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-825-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-827-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-830-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-835-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-840-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-850-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-857-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-865-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-822-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-825-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-827-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-830-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-835-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-840-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-850-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-857-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-865-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-922-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-925-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-927-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-930-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-935-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-940-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-950-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-957-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-965-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-922-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-925-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-927-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-930-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-935-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-940-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-950-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-957-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-965-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-925-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-927-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-930-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-935-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-940-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140

Product family datasheet

Product description	Light technical data					LED module information
	LED pitch	Beam angle	Rated beam angle (half peak value)	Starting time	Warm-up time (60 %)	Number of LEDs per meter
LF2000S -G5-950-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-957-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-965-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-925R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-927R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-930R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-935R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-940R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF800S -G5-950R-10 L2	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-925R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-927R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-930R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-935R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-940R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF1200S -G5-950R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-925R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-927R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-930R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-935R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-940R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140
LF2000S -G5-950R-05 L1	7.14 mm	120 °	120.00 °	< 0.5 s	< 0.50 s	140

Product description	Number of LEDs per smallest unit	Dimensions & weight				
		Length	Length – smallest unit	Width	Height	Cable length
LF800S -G5-822-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-825-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-827-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-830-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-835-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-840-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-850-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-857-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-865-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-822-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-825-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-827-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-830-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-835-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-840-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-850-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0

Product family datasheet

Product description	Number of LEDs per smallest unit	Dimensions & weight				
		Length	Length – smallest unit	Width	Height	Cable length
LF1200S -G5-857-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-865-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-822-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-825-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-827-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-830-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-835-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-840-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-850-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-857-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-865-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-922-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-925-10 L2	7	1000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-927-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-930-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-935-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-940-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-950-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-957-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-965-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-922-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-925-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-927-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-930-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-935-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-940-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-950-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-957-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-965-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-925-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-927-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-930-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-935-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-940-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-950-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-957-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-965-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-925R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-927R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-930R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-935R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-940R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF800S -G5-950R-10 L2	7	10000 mm	50.0 mm	8.00 mm	1.40 mm	500.0

Product family datasheet

Product description	Number of LEDs per smallest unit	Dimensions & weight				
		Length	Length – smallest unit	Width	Height	Cable length
LF1200S -G5-925R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-927R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-930R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-935R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-940R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF1200S -G5-950R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-925R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-927R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-930R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-935R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-940R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0
LF2000S -G5-950R-05 L1	7	5000 mm	50.0 mm	8.00 mm	1.40 mm	500.0

Product description	Product weight	Temperatures & operating conditions			
		Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range	Temperature range at storage
LF800S -G5-822-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-825-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-827-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-830-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-835-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-840-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-850-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-857-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-865-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-822-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-825-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-827-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-830-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-835-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-840-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-850-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-857-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-865-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-822-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-825-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-827-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-830-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-835-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-840-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-850-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-857-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C

Product family datasheet

Product description	Product weight	Temperatures & operating conditions			
		Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range	Temperature range at storage
LF2000S -G5-865-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-922-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-925-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-927-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-930-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-935-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-940-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-950-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-957-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-965-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-922-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-925-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-927-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-930-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-935-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-940-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-950-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-957-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-965-10 L2	123.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-925-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-927-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-930-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-935-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-940-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-950-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-957-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-965-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-925R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-927R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-930R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-935R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-940R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF800S -G5-950R-10 L2	123.00 g	35 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-925R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-927R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-930R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-935R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-940R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF1200S -G5-950R-05 L1	62.00 g	40 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-925R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-927R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-930R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C

Product family datasheet

Product description	Product weight	Temperatures & operating conditions			
		Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range	Temperature range at storage
LF2000S -G5-935R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-940R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C
LF2000S -G5-950R-05 L1	62.00 g	45 °C	-30...85 °C ¹⁾	-30...+50 °C ²⁾	-40...85 °C

Product description	Lifespan				Additional product data
	Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time	Number of switching cycles	Predecessor EAN
LF800S -G5-822-10 L2	60000 h	60000 h	0.70	15000	4052899575691
LF800S -G5-825-10 L2	60000 h	60000 h	0.70	15000	4052899575738
LF800S -G5-827-10 L2	60000 h	60000 h	0.70	15000	4052899575752
LF800S -G5-830-10 L2	60000 h	60000 h	0.70	15000	4052899575790
LF800S -G5-835-10 L2	60000 h	60000 h	0.70	15000	4052899575813
LF800S -G5-840-10 L2	60000 h	60000 h	0.70	15000	4052899575851
LF800S -G5-850-10 L2	60000 h	60000 h	0.70	15000	4062172061940
LF800S -G5-857-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-865-10 L2	60000 h	60000 h	0.70	15000	4052899575875
LF1200S -G5-822-10 L2	60000 h	60000 h	0.70	15000	4062172142557
LF1200S -G5-825-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-827-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-830-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-835-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-840-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-850-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-857-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-865-10 L2	60000 h	60000 h	0.70	15000	
LF2000S -G5-822-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-825-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-827-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-830-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-835-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-840-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-850-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-857-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-865-05 L1	60000 h	60000 h	0.70	15000	
LF800S -G5-922-10 L2	60000 h	60000 h	0.70	15000	4062172002417
LF800S -G5-925-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-927-10 L2	60000 h	60000 h	0.70	15000	4052899575912
LF800S -G5-930-10 L2	60000 h	60000 h	0.70	15000	4052899575936
LF800S -G5-935-10 L2	60000 h	60000 h	0.70	15000	4052899575950
LF800S -G5-940-10 L2	60000 h	60000 h	0.70	15000	4052899575998
LF800S -G5-950-10 L2	60000 h	60000 h	0.70	15000	

Product family datasheet

Product description	Lifespan				Additional product data
	Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time	Number of switching cycles	Predecessor EAN
LF800S -G5-957-10 L2	60000 h	60000 h	0.70	15000	4052899576018
LF800S -G5-965-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-922-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-925-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-927-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-930-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-935-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-940-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-950-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-957-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-965-10 L2	60000 h	60000 h	0.70	15000	
LF2000S -G5-925-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-927-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-930-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-935-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-940-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-950-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-957-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-965-05 L1	60000 h	60000 h	0.70	15000	
LF800S -G5-925R-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-927R-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-930R-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-935R-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-940R-10 L2	60000 h	60000 h	0.70	15000	
LF800S -G5-950R-10 L2	60000 h	60000 h	0.70	15000	
LF1200S -G5-925R-05 L1	60000 h	60000 h	0.70	15000	
LF1200S -G5-927R-05 L1	60000 h	60000 h	0.70	15000	
LF1200S -G5-930R-05 L1	60000 h	60000 h	0.70	15000	
LF1200S -G5-935R-05 L1	60000 h	60000 h	0.70	15000	
LF1200S -G5-940R-05 L1	60000 h	60000 h	0.70	15000	
LF1200S -G5-950R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-925R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-927R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-930R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-935R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-940R-05 L1	60000 h	60000 h	0.70	15000	
LF2000S -G5-950R-05 L1	60000 h	60000 h	0.70	15000	

Product description	ID of contained light source	Capabilities		Certificates & standards	
		Dimmable	Lowest bending radius	Energy consumption	Standards
LF800S -G5-822-10 L2	LS_TRV_285916	Yes	20 mm	80 kWh/1000h	CE/ENEC/EAC/UL

Product family datasheet

Product description	ID of contained light source	Capabilities		Certificates & standards	
		Dimmable	Lowest bending radius	Energy consumption	Standards
LF800S -G5-825-10 L2	LS_TRV_285917	Yes	20 mm	74 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-827-10 L2	LS_TRV_285918	Yes	20 mm	70 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-830-10 L2	LS_TRV_285919	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-835-10 L2	LS_TRV_285920	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-840-10 L2	LS_TRV_285921	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-850-10 L2	LS_TRV_285922	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-857-10 L2	LS_TRV_286003	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF800S -G5-865-10 L2	LS_TRV_285923	Yes	20 mm	66 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-822-10 L2	LS_TRV_285932	Yes	20 mm	117 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-825-10 L2	LS_TRV_285933	Yes	20 mm	108 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-827-10 L2	LS_TRV_285934	Yes	20 mm	102 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-830-10 L2	LS_TRV_285935	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-835-10 L2	LS_TRV_285936	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-840-10 L2	LS_TRV_285937	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-850-10 L2	LS_TRV_285938	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-857-10 L2	LS_TRV_286007	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF1200S -G5-865-10 L2	LS_TRV_285939	Yes	20 mm	95 kWh/1000h	CE/ENEC/EAC/UL
LF2000S -G5-822-05 L1	LS_TRV_285948	Yes	20 mm	100 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-825-05 L1	LS_TRV_285949	Yes	20 mm	96 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-827-05 L1	LS_TRV_285950	Yes	20 mm	88 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-830-05 L1	LS_TRV_285951	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-835-05 L1	LS_TRV_285952	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-840-05 L1	LS_TRV_285953	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-850-05 L1	LS_TRV_285954	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC

Product family datasheet

Product description	ID of contained light source	Capabilities		Certificates & standards	
		Dimmable	Lowest bending radius	Energy consumption	Standards
LF2000S -G5-857-05 L1	LS_TRV_286011	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-865-05 L1	LS_TRV_285955	Yes	20 mm	81 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-922-10 L2		Yes	20 mm	99 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-925-10 L2	LS_TRV_286005	Yes	20 mm	88 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-927-10 L2	LS_TRV_285924	Yes	20 mm	83 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-930-10 L2	LS_TRV_285925	Yes	20 mm	83 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-935-10 L2	LS_TRV_285926	Yes	20 mm	83 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-940-10 L2	LS_TRV_285927	Yes	20 mm	74 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-950-10 L2	LS_TRV_285928	Yes	20 mm	74 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-957-10 L2	LS_TRV_286006	Yes	20 mm	74 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-965-10 L2	LS_TRV_285929	Yes	20 mm	74 kWh/1000h	CE/UL/ENE C/EAC
LF1200S -G5-922-10 L2		Yes	20 mm	128 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-925-10 L2	LS_TRV_286009	Yes	20 mm	128 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-927-10 L2	LS_TRV_285940	Yes	20 mm	120 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-930-10 L2	LS_TRV_285941	Yes	20 mm	120 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-935-10 L2	LS_TRV_285942	Yes	20 mm	120 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-940-10 L2	LS_TRV_285943	Yes	20 mm	109 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-950-10 L2	LS_TRV_285944	Yes	20 mm	109 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-957-10 L2	LS_TRV_286010	Yes	20 mm	109 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-965-10 L2	LS_TRV_285945	Yes	20 mm	109 kWh/1000h	CE/ENEC/E AC/UL
LF2000S -G5-925-05 L1	LS_TRV_286013	Yes	20 mm	108 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-927-05 L1	LS_TRV_285956	Yes	20 mm	102 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-930-05 L1	LS_TRV_285957	Yes	20 mm	102 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-935-05 L1	LS_TRV_285958	Yes	20 mm	102 kWh/1000h	CE/UL/ENE C/EAC

Product family datasheet

Product description	ID of contained light source	Capabilities		Certificates & standards	
		Dimmable	Lowest bending radius	Energy consumption	Standards
LF2000S -G5-940-05 L1	LS_TRV_285959	Yes	20 mm	96 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-950-05 L1	LS_TRV_285960	Yes	20 mm	96 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-957-05 L1	LS_TRV_286014	Yes	20 mm	96 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-965-05 L1	LS_TRV_285961	Yes	20 mm	96 kWh/1000h	CE/UL/ENE C/EAC
LF800S -G5-925R-10 L2	LS_TRV_286028	Yes	20 mm	92 kWh/1000h	CE/ENEC/E AC/UL
LF800S -G5-927R-10 L2	LS_TRV_286029	Yes	20 mm	92 kWh/1000h	CE/ENEC/E AC/UL
LF800S -G5-930R-10 L2	LS_TRV_286030	Yes	20 mm	81 kWh/1000h	CE/ENEC/E AC/UL
LF800S -G5-935R-10 L2	LS_TRV_285930	Yes	20 mm	81 kWh/1000h	CE/ENEC/E AC/UL
LF800S -G5-940R-10 L2	LS_TRV_286031	Yes	20 mm	81 kWh/1000h	CE/ENEC/E AC/UL
LF800S -G5-950R-10 L2	LS_TRV_285931	Yes	20 mm	81 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-925R-05 L1	LS_TRV_286032	Yes	20 mm	66 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-927R-05 L1	LS_TRV_286033	Yes	20 mm	66 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-930R-05 L1	LS_TRV_286034	Yes	20 mm	60 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-935R-05 L1	LS_TRV_285946	Yes	20 mm	60 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-940R-05 L1	LS_TRV_286035	Yes	20 mm	60 kWh/1000h	CE/ENEC/E AC/UL
LF1200S -G5-950R-05 L1	LS_TRV_285947	Yes	20 mm	60 kWh/1000h	CE/ENEC/E AC/UL
LF2000S -G5-925R-05 L1	LS_TRV_286036	Yes	20 mm	108 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-927R-05 L1	LS_TRV_286037	Yes	20 mm	108 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-930R-05 L1	LS_TRV_286038	Yes	20 mm	100 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-935R-05 L1	LS_TRV_285962	Yes	20 mm	100 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-940R-05 L1	LS_TRV_286039	Yes	20 mm	100 kWh/1000h	CE/UL/ENE C/EAC
LF2000S -G5-950R-05 L1	LS_TRV_285963	Yes	20 mm	100 kWh/1000h	CE/UL/ENE C/EAC

Product family datasheet

Product description	Type of protection	Energy efficiency class of the contained light source	Logistical data
			Commodity code
LF800S -G5-822-10 L2	IP00	F	940540399000
LF800S -G5-825-10 L2	IP00	F	940540399000
LF800S -G5-827-10 L2	IP00	E	940540399000
LF800S -G5-830-10 L2	IP00	E	940540399000
LF800S -G5-835-10 L2	IP00	E	940540399000
LF800S -G5-840-10 L2	IP00	E	940540399000
LF800S -G5-850-10 L2	IP00	E	940540399000
LF800S -G5-857-10 L2	IP00	E	940540399000
LF800S -G5-865-10 L2	IP00	E	940540399000
LF1200S -G5-822-10 L2	IP00	F	940540399000
LF1200S -G5-825-10 L2	IP00	F	940540399000
LF1200S -G5-827-10 L2	IP00	E	940540399000
LF1200S -G5-830-10 L2	IP00	E	940540399000
LF1200S -G5-835-10 L2	IP00	E	940540399000
LF1200S -G5-840-10 L2	IP00	E	940540399000
LF1200S -G5-850-10 L2	IP00	E	940540399000
LF1200S -G5-857-10 L2	IP00	E	940540399000
LF1200S -G5-865-10 L2	IP00	E	940540399000
LF2000S -G5-822-05 L1	IP00	F	940540399000
LF2000S -G5-825-05 L1	IP00	F	940540399000
LF2000S -G5-827-05 L1	IP00	E	940540399000
LF2000S -G5-830-05 L1	IP00	E	940540399000
LF2000S -G5-835-05 L1	IP00	E	940540399000
LF2000S -G5-840-05 L1	IP00	E	940540399000
LF2000S -G5-850-05 L1	IP00	E	940540399000
LF2000S -G5-857-05 L1	IP00	E	940540399000
LF2000S -G5-865-05 L1	IP00	E	940540399000
LF800S -G5-922-10 L2	IP00		940540399000
LF800S -G5-925-10 L2	IP00	F	940540399000
LF800S -G5-927-10 L2	IP00	F	940540399000
LF800S -G5-930-10 L2	IP00	F	940540399000
LF800S -G5-935-10 L2	IP00	F	940540399000
LF800S -G5-940-10 L2	IP00	F	940540399000
LF800S -G5-950-10 L2	IP00	F	940540399000
LF800S -G5-957-10 L2	IP00	F	940540399000
LF800S -G5-965-10 L2	IP00	F	940540399000
LF1200S -G5-922-10 L2	IP00		940540399000
LF1200S -G5-925-10 L2	IP00	F	940540399000
LF1200S -G5-927-10 L2	IP00	F	940540399000
LF1200S -G5-930-10 L2	IP00	F	940540399000
LF1200S -G5-935-10 L2	IP00	F	940540399000
LF1200S -G5-940-10 L2	IP00	F	940540399000
LF1200S -G5-950-10 L2	IP00	F	940540399000

Product family datasheet

Product description	Type of protection	Energy efficiency class of the contained light source	Logistical data
			Commodity code
LF1200S -G5-957-10 L2	IP00	F	940540399000
LF1200S -G5-965-10 L2	IP00	F	940540399000
LF2000S -G5-925-05 L1	IP00	F	940540399000
LF2000S -G5-927-05 L1	IP00	F	940540399000
LF2000S -G5-930-05 L1	IP00	F	940540399000
LF2000S -G5-935-05 L1	IP00	F	940540399000
LF2000S -G5-940-05 L1	IP00	F	940540399000
LF2000S -G5-950-05 L1	IP00	F	940540399000
LF2000S -G5-957-05 L1	IP00	F	940540399000
LF2000S -G5-965-05 L1	IP00	F	940540399000
LF800S -G5-925R-10 L2	IP00	F	940540399000
LF800S -G5-927R-10 L2	IP00	F	940540399000
LF800S -G5-930R-10 L2	IP00	F	940540399000
LF800S -G5-935R-10 L2	IP00	F	940540399000
LF800S -G5-940R-10 L2	IP00	F	940540399000
LF800S -G5-950R-10 L2	IP00	F	940540399000
LF1200S -G5-925R-05 L1	IP00	F	940540399000
LF1200S -G5-927R-05 L1	IP00	F	940540399000
LF1200S -G5-930R-05 L1	IP00	F	940540399000
LF1200S -G5-935R-05 L1	IP00	F	940540399000
LF1200S -G5-940R-05 L1	IP00	F	940540399000
LF1200S -G5-950R-05 L1	IP00	F	940540399000
LF2000S -G5-925R-05 L1	IP00	F	940540399000
LF2000S -G5-927R-05 L1	IP00	F	940540399000
LF2000S -G5-930R-05 L1	IP00	F	940540399000
LF2000S -G5-935R-05 L1	IP00	F	940540399000
LF2000S -G5-940R-05 L1	IP00	F	940540399000
LF2000S -G5-950R-05 L1	IP00	F	940540399000

Product description	Environmental information			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
LF800S -G5-822-10 L2	30-12-2021	4062172170055	Lead	7439-92-1
LF800S -G5-825-10 L2	30-12-2021	4062172169813	Lead	7439-92-1
LF800S -G5-827-10 L2	30-12-2021	4062172169837	Lead	7439-92-1
LF800S -G5-830-10 L2	30-12-2021	4062172169851	Lead	7439-92-1
LF800S -G5-835-10 L2	30-12-2021	4062172169875	Lead	7439-92-1
LF800S -G5-840-10 L2	30-12-2021	4062172169899	Lead	7439-92-1
LF800S -G5-850-10 L2	30-12-2021	4062172169912	Lead	7439-92-1
LF800S -G5-857-10 L2	30-12-2021	4062172169936	Lead	7439-92-1
LF800S -G5-865-10 L2	30-12-2021	4062172169950	Lead	7439-92-1
LF1200S -G5-822-10 L2	30-12-2021	4062172170277	Lead	7439-92-1
LF1200S -G5-825-10 L2	30-12-2021	4062172170291	Lead	7439-92-1
LF1200S -G5-827-10 L2	30-12-2021	4062172170314	Lead	7439-92-1

Product family datasheet

Product description	Environmental information			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
LF1200S -G5-830-10 L2	30-12-2021	4062172170338	Lead	7439-92-1
LF1200S -G5-835-10 L2	30-12-2021	4062172170352	Lead	7439-92-1
LF1200S -G5-840-10 L2	30-12-2021	4062172170376	Lead	7439-92-1
LF1200S -G5-850-10 L2	30-12-2021	4062172170390	Lead	7439-92-1
LF1200S -G5-857-10 L2	30-12-2021	4062172170413	Lead	7439-92-1
LF1200S -G5-865-10 L2	30-12-2021	4062172170437	Lead	7439-92-1
LF2000S -G5-822-05 L1	30-12-2021	4062172170932	Lead	7439-92-1
LF2000S -G5-825-05 L1	30-12-2021	4062172170956	Lead	7439-92-1
LF2000S -G5-827-05 L1	30-12-2021	4062172170970	Lead	7439-92-1
LF2000S -G5-830-05 L1	30-12-2021	4062172170994	Lead	7439-92-1
LF2000S -G5-835-05 L1	30-12-2021	4062172171014	Lead	7439-92-1
LF2000S -G5-840-05 L1	30-12-2021	4062172171038	Lead	7439-92-1
LF2000S -G5-850-05 L1	30-12-2021	4062172171052	Lead	7439-92-1
LF2000S -G5-857-05 L1	30-12-2021	4062172171076	Lead	7439-92-1
LF2000S -G5-865-05 L1	30-12-2021	4062172171090	Lead	7439-92-1
LF800S -G5-922-10 L2	30-12-2021	4062172169974	Lead	7439-92-1
LF800S -G5-925-10 L2	30-12-2021	4062172169998	Lead	7439-92-1
LF800S -G5-927-10 L2	30-12-2021	4062172170017	Lead	7439-92-1
LF800S -G5-930-10 L2	30-12-2021	4062172170031	Lead	7439-92-1
LF800S -G5-935-10 L2	30-12-2021	4062172169790	Lead	7439-92-1
LF800S -G5-940-10 L2	11-01-2022	4062172170079	No declarable substances contained	No CAS
LF800S -G5-950-10 L2	11-01-2022	4062172170093	No declarable substances contained	No CAS
LF800S -G5-957-10 L2	11-01-2022	4062172170116	No declarable substances contained	No CAS
LF800S -G5-965-10 L2	11-01-2022	4062172170130	No declarable substances contained	No CAS
LF1200S -G5-922-10 L2	30-12-2021	4062172170451	Lead	7439-92-1
LF1200S -G5-925-10 L2	30-12-2021	4062172170475	Lead	7439-92-1
LF1200S -G5-927-10 L2	30-12-2021	4062172170611	Lead	7439-92-1
LF1200S -G5-930-10 L2	30-12-2021	4062172170673	Lead	7439-92-1
LF1200S -G5-935-10 L2	30-12-2021	4062172170697	Lead	7439-92-1
LF1200S -G5-940-10 L2	30-12-2021	4062172171410	Lead	7439-92-1
LF1200S -G5-950-10 L2	30-12-2021	4062172171434	Lead	7439-92-1
LF1200S -G5-957-10 L2	30-12-2021	4062172171458	Lead	7439-92-1
LF1200S -G5-965-10 L2	30-12-2021	4062172171472	Lead	7439-92-1
LF2000S -G5-925-05 L1	30-12-2021	4062172171137	Lead	7439-92-1
LF2000S -G5-927-05 L1	30-12-2021	4062172171151	Lead	7439-92-1
LF2000S -G5-930-05 L1	30-12-2021	4062172171175	Lead	7439-92-1
LF2000S -G5-935-05 L1	30-12-2021	4062172171199	Lead	7439-92-1
LF2000S -G5-940-05 L1	30-12-2021	4062172171212	Lead	7439-92-1
LF2000S -G5-950-05 L1	30-12-2021	4062172171236	Lead	7439-92-1
LF2000S -G5-957-05 L1	30-12-2021	4062172171250	Lead	7439-92-1
LF2000S -G5-965-05 L1	30-12-2021	4062172171274	Lead	7439-92-1

Product family datasheet

Product description	Environmental information			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
LF800S -G5-925R-10 L2	30-12-2021	4062172170154	Lead	7439-92-1
LF800S -G5-927R-10 L2	30-12-2021	4062172170178	Lead	7439-92-1
LF800S -G5-930R-10 L2	30-12-2021	4062172170192	Lead	7439-92-1
LF800S -G5-935R-10 L2	30-12-2021	4062172170215	Lead	7439-92-1
LF800S -G5-940R-10 L2	30-12-2021	4062172170239	Lead	7439-92-1
LF800S -G5-950R-10 L2	30-12-2021	4062172170253	Lead	7439-92-1
LF1200S -G5-925R-05 L1	30-12-2021	4062172171496	Lead	7439-92-1
LF1200S -G5-927R-05 L1	30-12-2021	4062172171519	Lead	7439-92-1
LF1200S -G5-930R-05 L1	30-12-2021	4062172171533	Lead	7439-92-1
LF1200S -G5-935R-05 L1	30-12-2021	4062172171557	Lead	7439-92-1
LF1200S -G5-940R-05 L1	30-12-2021	4062172171571	Lead	7439-92-1
LF1200S -G5-950R-05 L1	30-12-2021	4062172171595	Lead	7439-92-1
LF2000S -G5-925R-05 L1	30-12-2021	4062172171298	Lead	7439-92-1
LF2000S -G5-927R-05 L1	30-12-2021	4062172171311	Lead	7439-92-1
LF2000S -G5-930R-05 L1	30-12-2021	4062172171335	Lead	7439-92-1
LF2000S -G5-935R-05 L1	30-12-2021	4062172171359	Lead	7439-92-1
LF2000S -G5-940R-05 L1	30-12-2021	4062172171373	Lead	7439-92-1
LF2000S -G5-950R-05 L1	30-12-2021	4062172171397	Lead	7439-92-1

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF800S -G5-822-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	47466dbe-3cfd-40a4-a198-e4dd35c2d94f
LF800S -G5-825-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c2d6df10-344c-44a3-8c92-accd09e4c76d
LF800S -G5-827-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	83dccd2c-3eab-4caf-a97e-ec7423c9dada
LF800S -G5-830-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c06a4838-e81d-4484-9a2c-f353cbe95343

Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF800S -G5-835-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1130b020-965c-4002-9596-1116f4b4977a
LF800S -G5-840-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	bbd7c2f4-3ed5-4ce1-b8fb-2a7489940c8e
LF800S -G5-850-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	149a4cf7-3b3b-4bcf-a6b1-0645cc7aa157
LF800S -G5-857-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	96163408-01c2-4b6f-87b4-b5df0b00c51a
LF800S -G5-865-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4f4ee859-a36b-4370-b619-15aab2468bcf
LF1200S -G5-822-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	bfd04c5b-e9fe-4e1d-b85d-10437de0b180
LF1200S -G5-825-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	540acc44-7b70-4b42-a8a7-45d0a5a02645
LF1200S -G5-827-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	0a852355-75ce-4781-839a-149ff0212aff
LF1200S -G5-830-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4c248834-2ad9-4be0-922b-1c8e5b64c6ae

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF1200S -G5-835-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	3b83cd37-74e0-4adb-a931-7698ed6d4056
LF1200S -G5-840-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1bc2c000-2489-4e6f-a60e-2d5533c27a7c
LF1200S -G5-850-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	66a2b44e-7936-4409-9100-5bdee04f3408
LF1200S -G5-857-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	ffe2548d-c670-4e92-8636-960f553c4a3b
LF1200S -G5-865-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	054bb7cc-6d88-403a-b910-6be211b87dca
LF2000S -G5-822-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	eaba3195-f623-4030-8976-4e662625a7bd
LF2000S -G5-825-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5492bde7-4f99-45d1-8a6c-23333b0115b5
LF2000S -G5-827-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5ff76f5f-2b9b-423d-8be8-02b8ec376b94
LF2000S -G5-830-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c65714de-823f-4e35-8ba7-c1c08360cfad

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF2000S -G5-835-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4760a947-a7e4-4133-82a0-7e116d3b61bb
LF2000S -G5-840-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	8c53e83e-c65a-49d6-97ab-f9d08038e4ec
LF2000S -G5-850-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	40514e6f-ccfe-47bb-8e71-5216c2a1ae41
LF2000S -G5-857-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6dac22aa-eb8b-45e4-9972-2010ce9373e9
LF2000S -G5-865-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6c223a71-7144-422b-84c2-65e602f0b86b
LF800S -G5-922-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6f477edf-b316-4f36-a2b9-b03f2a79b61b
LF800S -G5-925-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	ac2278f0-252b-4756-b55c-e7d2a8d2a996
LF800S -G5-927-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	b888b049-ae60-4588-824d-d086be6bc47f
LF800S -G5-930-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	e76a1e05-b358-45be-9a10-b58b607c8b1f

Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF800S -G5-935-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	eea40e29-5e68-4f37-b734-833d25fe4a23
LF800S -G5-940-10 L2		No declarable substances contained
LF800S -G5-950-10 L2		No declarable substances contained
LF800S -G5-957-10 L2		No declarable substances contained
LF800S -G5-965-10 L2		No declarable substances contained
LF1200S -G5-922-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	bca58c5d-e834-4ccf-9060-4a13009c473b
LF1200S -G5-925-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5305ade2-93e2-4fe2-b357-20d7ab9634ca
LF1200S -G5-927-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	943756a8-b8c2-4c78-a608-0d0c26481b27
LF1200S -G5-930-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	87c7619c-dba5-42e9-9f4e-f8438127a1b8
LF1200S -G5-935-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	72957146-ba7d-401d-8567-6a42134422ef
LF1200S -G5-940-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	cd9ff6c2-380a-4fbd-9048-129f6895d89f

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF1200S -G5-950-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	676ef3a7-7512-4efd-8305-8a84d336931c
LF1200S -G5-957-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1bfb0f2a-9cd9-49b7-b64f-47e1871b0e50
LF1200S -G5-965-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	fa01a1c6-fc7f-4266-acbc-308dcfdd97e8
LF2000S -G5-925-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	b9e7fe3e-4689-4e80-957d-cb8f7925efcf
LF2000S -G5-927-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c91843d4-3234-4189-b0d8-d9d9eba137c2
LF2000S -G5-930-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	02348ca6-e85d-41d1-afbe-95e8c0638174
LF2000S -G5-935-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	63529729-a72d-45a5-8c33-cd1eb9c8a449
LF2000S -G5-940-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	70b4f629-9623-4a2a-8f6d-1fd35cbc42db
LF2000S -G5-950-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5cb32944-c8b8-443a-b174-3b38ca249d91

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF2000S -G5-957-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	2ce95458-bcc6-4faf-b309-e04426799ac2
LF2000S -G5-965-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5489b347-452c-4f8e-8baf-50c17a031fb2
LF800S -G5-925R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	61d1865f-8041-4f2f-b5ee-c4d007d20fc5
LF800S -G5-927R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4c61fb72-f094-42fa-8129-842f60a103f4
LF800S -G5-930R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	365d150a-e781-47b1-be2c-878f42e98081
LF800S -G5-935R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	e1a509dd-55e8-4b89-84df-0c8eff008158
LF800S -G5-940R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	7f6572f4-256d-4955-999d-cb90e236c3fb
LF800S -G5-950R-10 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	f378cdcd-8420-4749-bca0-01b8663bcff3
LF1200S -G5-925R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1ea0bd56-b471-4438-a174-c81ecbd2a47e

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF1200S -G5-927R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6447e9da-40b4-454d-bdf2-46a1995c9157
LF1200S -G5-930R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	279af179-999c-4fe2-ae0f-7d6c3ac9289d
LF1200S -G5-935R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	de3f97a1-b926-4ace-8369-fe63ba23d58f
LF1200S -G5-940R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	fba78a41-d7bd-4afc-a6a8-1f5d2d1db15f
LF1200S -G5-950R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	41933eda-8698-4f74-ac7b-d75de6f325ff
LF2000S -G5-925R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d8dac385-a8d0-413c-8d0d-955403f9504a
LF2000S -G5-927R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	dd635cb0-f304-4479-a93e-9d28fd3baaca
LF2000S -G5-930R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	770fff5e-5eee-400a-b3fd-d9f0de3d4975
LF2000S -G5-935R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5f5ab355-481f-4ef9-944f-4555818d4222


Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF2000S -G5-940R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	9e638f94-7b55-4ae5-9080-19570e6fe756
LF2000S -G5-950R-05 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	472f11a6-5ede-47bf-bb4e-82471d09a412


1) Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

2) Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min


Product family datasheet

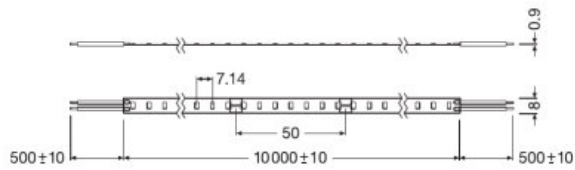


LINEARlight FLEX Uniformity



LINEARlight FLEX Uniformity



LINEARlight FLEX Uniformity

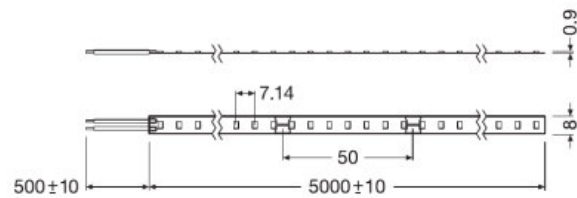

LINEARlight FLEX Uniformity

Equipment / Accessories

- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Connectors: quick-and-easy toolless installation with SLIMCONNECTsystem G2
- Drivers and dimmers: wide selection of OPTOTRONIC 24 V DALI, DMX and BLE
- Check for more detailed information the specification sheets in the download section

Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Country specific information

Product family datasheet

Download Data

File	
	User instruction LINEARlight FLEX Uniformity
	Product Datasheet LINEARlight Flex Uniformity Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates LF(P)-Uniformity CB 181120
	Certificates LF(P)-Uniformity ENEC 181120
	Certificates LF(P)Uniformity UL 241120
	Declarations of conformity LF Uniformity CE 4233484 221121
	Eulumdat LF800S-G5-822-10 L2 EULUM 231020
	Eulumdat LF800S-G5-822-10 L2 EULUM 231020
	IES data LF800S-G5-822-10 L2 IES data 231020
	IES data LF800S-G5-822-10 L2 IES data 231020
	Eulumdat LF800S-G5-825-10 L2 EULUM 231020
	Eulumdat LF800S-G5-825-10 L2 EULUM 231020
	IES data LF800S-G5-825-10 L2 IES data 231020
	IES data LF800S-G5-825-10 L2 IES data 231020
	Eulumdat LF800S-G5-827-10 L2 EULUM 231020
	Eulumdat LF800S-G5-827-10 L2 EULUM 231020
	IES data LF800S-G5-827-10 L2 IES data 231020
	IES data LF800S-G5-827-10 L2 IES data 231020
	Eulumdat LF800S-G5-830-10 L2 EULUM 231020
	Eulumdat LF800S-G5-830-10 L2 EULUM 231020

Product family datasheet

	IES data LF800S-G5-830-10 L2 IES data 231020
	IES data LF800S-G5-830-10 L2 IES data 231020
	Eulumdat LF800S-G5-835-10 L2 EULUM 231020
	Eulumdat LF800S-G5-835-10 L2 EULUM 231020
	IES data LF800S-G5-835-10 L2 IES data 231020
	IES data LF800S-G5-835-10 L2 IES data 231020
	Eulumdat LF800S-G5-840-10 L2 EULUM 231020
	Eulumdat LF800S-G5-840-10 L2 EULUM 231020
	IES data LF800S-G5-840-10 L2 IES data 231020
	IES data LF800S-G5-840-10 L2 IES data 231020
	Eulumdat LF800S-G5-850-10 L2 EULUM 231020
	Eulumdat LF800S-G5-850-10 L2 EULUM 231020
	IES data LF800S-G5-850-10 L2 IES data 231020
	IES data LF800S-G5-850-10 L2 IES data 231020
	Eulumdat LF800S-G5-857-10 L2 EULUM 231020
	Eulumdat LF800S-G5-857-10 L2 EULUM 231020
	IES data LF800S-G5-857-10 L2 IES data 231020
	IES data LF800S-G5-857-10 L2 IES data 231020
	Eulumdat LF800S-G5-865-10 L2 EULUM 231020
	Eulumdat LF800S-G5-865-10 L2 EULUM 231020
	IES data LF800S-G5-865-10 L2 IES data 231020
	IES data LF800S-G5-865-10 L2 IES data 231020
	Eulumdat LF1200S-G5-822-10 L2 EULUM 231020

Product family datasheet

	Eulumdat LF1200S-G5-822-10 L2 EULUM 231020
	IES data LF1200S-G5-822-10 L2 IES data 231020
	IES data LF1200S-G5-822-10 L2 IES data 231020
	Eulumdat LF1200S-G5-825-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-825-10 L2 EULUM 231020
	IES data LF1200S-G5-825-10 L2 IES data 231020
	IES data LF1200S-G5-825-10 L2 IES data 231020
	Eulumdat LF1200S-G5-827-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-827-10 L2 EULUM 231020
	IES data LF1200S-G5-827-10 L2 IES data 231020
	IES data LF1200S-G5-827-10 L2 IES data 231020
	Eulumdat LF1200S-G5-830-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-830-10 L2 EULUM 231020
	IES data LF1200S-G5-830-10 L2 IES data 231020
	IES data LF1200S-G5-830-10 L2 IES data 231020
	Eulumdat LF1200S-G5-835-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-835-10 L2 EULUM 231020
	IES data LF1200S-G5-835-10 L2 IES data 231020
	IES data LF1200S-G5-835-10 L2 IES data 231020
	Eulumdat LF1200S-G5-840-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-840-10 L2 EULUM 231020
	IES data LF1200S-G5-840-10 L2 IES data 231020
	IES data LF1200S-G5-840-10 L2 IES data 231020

Product family datasheet

	Eulumdat LF1200S-G5-850-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-850-10 L2 EULUM 231020
	IES data LF1200S-G5-850-10 L2 IES data 231020
	IES data LF1200S-G5-850-10 L2 IES data 231020
	Eulumdat LF1200S-G5-857-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-857-10 L2 EULUM 231020
	IES data LF1200S-G5-857-10 L2 IES data 231020
	IES data LF1200S-G5-857-10 L2 IES data 231020
	Eulumdat LF1200S-G5-865-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-865-10 L2 EULUM 231020
	IES data LF1200S-G5-865-10 L2 IES data 231020
	IES data LF1200S-G5-865-10 L2 IES data 231020
	Eulumdat LF2000S-G5-822-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-822-05 L1 EULUM 231020
	IES data LF2000S-G5-822-05 L1 IES data 231020
	IES data LF2000S-G5-822-05 L1 IES data 231020
	Eulumdat LF2000S-G5-825-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-825-05 L1 EULUM 231020
	IES data LF2000S-G5-825-05 L1 IES data 231020
	IES data LF2000S-G5-825-05 L1 IES data 231020
	Eulumdat LF2000S-G5-827-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-827-05 L1 EULUM 231020
	IES data LF2000S-G5-827-05 L1 IES data 231020

Product family datasheet

	IES data LF2000S-G5-827-05 L1 IES data 231020
	Eulumdat LF2000S-G5-830-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-830-05 L1 EULUM 231020
	IES data LF2000S-G5-830-05 L1 IES data 231020
	IES data LF2000S-G5-830-05 L1 IES data 231020
	Eulumdat LF2000S-G5-835-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-835-05 L1 EULUM 231020
	IES data LF2000S-G5-835-05 L1 IES data 231020
	IES data LF2000S-G5-835-05 L1 IES data 231020
	Eulumdat LF2000S-G5-840-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-840-05 L1 EULUM 231020
	IES data LF2000S-G5-840-05 L1 IES data 231020
	IES data LF2000S-G5-840-05 L1 IES data 231020
	Eulumdat LF2000S-G5-850-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-850-05 L1 EULUM 231020
	IES data LF2000S-G5-850-05 L1 IES data 231020
	IES data LF2000S-G5-850-05 L1 IES data 231020
	Eulumdat LF2000S-G5-857-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-857-05 L1 EULUM 231020
	IES data LF2000S-G5-857-05 L1 IES data 231020
	IES data LF2000S-G5-857-05 L1 IES data 231020
	Eulumdat LF2000S-G5-865-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-865-05 L1 EULUM 231020

Product family datasheet

	IES data LF2000S-G5-865-05 L1 IES data 231020
	IES data LF2000S-G5-865-05 L1 IES data 231020
	Eulumdat LF800S-G5-922-10 L2 EULUM 231020
	Eulumdat LF800S-G5-922-10 L2 EULUM 231020
	IES data LF800S-G5-922-10 L2 IES data 231020
	IES data LF800S-G5-922-10 L2 IES data 231020
	Eulumdat LF800S-G5-925-10 L2 EULUM 231020
	Eulumdat LF800S-G5-925-10 L2 EULUM 231020
	IES data LF800S-G5-925-10 L2 IES data 231020
	IES data LF800S-G5-925-10 L2 IES data 231020
	Eulumdat LF800S-G5-927-10 L2 EULUM 231020
	Eulumdat LF800S-G5-927-10 L2 EULUM 231020
	IES data LF800S-G5-927-10 L2 IES data 231020
	IES data LF800S-G5-927-10 L2 IES data 231020
	Eulumdat LF800S-G5-930-10 L2 EULUM 231020
	Eulumdat LF800S-G5-930-10 L2 EULUM 231020
	IES data LF800S-G5-930-10 L2 IES data 231020
	IES data LF800S-G5-930-10 L2 IES data 231020
	Eulumdat LF800S-G5-935-10 L2 EULUM 231020
	Eulumdat LF800S-G5-935-10 L2 EULUM 231020
	IES data LF800S-G5-935-10 L2 IES data 231020
	IES data LF800S-G5-935-10 L2 IES data 231020
	Eulumdat LF800S-G5-940-10 L2 EULUM 231020

Product family datasheet

	Eulumdat LF800S-G5-940-10 L2 EULUM 231020
	IES data LF800S-G5-940-10 L2 IES data 231020
	IES data LF800S-G5-940-10 L2 IES data 231020
	Eulumdat LF800S-G5-950-10 L2 EULUM 231020
	Eulumdat LF800S-G5-950-10 L2 EULUM 231020
	IES data LF800S-G5-950-10 L2 IES data 231020
	IES data LF800S-G5-950-10 L2 IES data 231020
	Eulumdat LF800S-G5-957-10 L2 EULUM 231020
	Eulumdat LF800S-G5-957-10 L2 EULUM 231020
	IES data LF800S-G5-957-10 L2 IES data 231020
	IES data LF800S-G5-957-10 L2 IES data 231020
	Eulumdat LF800S-G5-965-10 L2 EULUM 231020
	Eulumdat LF800S-G5-965-10 L2 EULUM 231020
	IES data LF800S-G5-965-10 L2 IES data 231020
	IES data LF800S-G5-965-10 L2 IES data 231020
	Eulumdat LF1200S-G5-922-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-922-10 L2 EULUM 231020
	IES data LF1200S-G5-922-10 L2 IES data 231020
	IES data LF1200S-G5-922-10 L2 IES data 231020
	Eulumdat LF1200S-G5-925-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-925-10 L2 EULUM 231020
	IES data LF1200S-G5-925-10 L2 IES data 231020
	IES data LF1200S-G5-925-10 L2 IES data 231020

Product family datasheet

	Eulumdat LF1200S-G5-927-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-927-10 L2 EULUM 231020
	IES data LF1200S-G5-927-10 L2 IES data 231020
	IES data LF1200S-G5-927-10 L2 IES data 231020
	Eulumdat LF1200S-G5-930-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-930-10 L2 EULUM 231020
	IES data LF1200S-G5-930-10 L2 IES data 231020
	IES data LF1200S-G5-930-10 L2 IES data 231020
	Eulumdat LF1200S-G5-935-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-935-10 L2 EULUM 231020
	IES data LF1200S-G5-935-10 L2 IES data 231020
	IES data LF1200S-G5-935-10 L2 IES data 231020
	Eulumdat LF1200S-G5-940-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-940-10 L2 EULUM 231020
	IES data LF1200S-G5-940-10 L2 IES data 231020
	IES data LF1200S-G5-940-10 L2 IES data 231020
	Eulumdat LF1200S-G5-950-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-950-10 L2 EULUM 231020
	IES data LF1200S-G5-950-10 L2 IES data 231020
	IES data LF1200S-G5-950-10 L2 IES data 231020
	Eulumdat LF1200S-G5-957-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-957-10 L2 EULUM 231020
	IES data LF1200S-G5-957-10 L2 IES data 231020

Product family datasheet

	IES data LF1200S-G5-957-10 L2 IES data 231020
	Eulumdat LF1200S-G5-965-10 L2 EULUM 231020
	Eulumdat LF1200S-G5-965-10 L2 EULUM 231020
	IES data LF1200S-G5-965-10 L2 IES data 231020
	IES data LF1200S-G5-965-10 L2 IES data 231020
	Eulumdat LF2000S-G5-925-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-925-05 L1 EULUM 231020
	IES data LF2000S-G5-925-05 L1 IES data 231020
	IES data LF2000S-G5-925-05 L1 IES data 231020
	Eulumdat LF2000S-G5-927-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-927-05 L1 EULUM 231020
	IES data LF2000S-G5-927-05 L1 IES data 231020
	IES data LF2000S-G5-927-05 L1 IES data 231020
	Eulumdat LF2000S-G5-930-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-930-05 L1 EULUM 231020
	IES data LF2000S-G5-930-05 L1 IES data 231020
	IES data LF2000S-G5-930-05 L1 IES data 231020
	Eulumdat LF2000S-G5-935-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-935-05 L1 EULUM 231020
	IES data LF2000S-G5-935-05 L1 IES data 231020
	IES data LF2000S-G5-935-05 L1 IES data 231020
	Eulumdat LF2000S-G5-940-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-940-05 L1 EULUM 231020

Product family datasheet

	IES data LF2000S-G5-940-05 L1 IES data 231020
	IES data LF2000S-G5-940-05 L1 IES data 231020
	Eulumdat LF2000S-G5-950-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-950-05 L1 EULUM 231020
	IES data LF2000S-G5-950-05 L1 IES data 231020
	IES data LF2000S-G5-950-05 L1 IES data 231020
	Eulumdat LF2000S-G5-957-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-957-05 L1 EULUM 231020
	IES data LF2000S-G5-957-05 L1 IES data 231020
	IES data LF2000S-G5-957-05 L1 IES data 231020
	Eulumdat LF2000S-G5-965-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-965-05 L1 EULUM 231020
	IES data LF2000S-G5-965-05 L1 IES data 231020
	IES data LF2000S-G5-965-05 L1 IES data 231020
	Eulumdat LF800S-G5-925R-10 L2 EULUM 231020
	Eulumdat LF800S-G5-925R-10 L2 EULUM 231020
	IES data LF800S-G5-925R-10 L2 IES data 231020
	IES data LF800S-G5-925R-10 L2 IES data 231020
	Eulumdat LF800S-G5-927R-10 L2 EULUM 231020
	Eulumdat LF800S-G5-927R-10 L2 EULUM 231020
	IES data LF800S-G5-927R-10 L2 IES data 231020
	IES data LF800S-G5-927R-10 L2 IES data 231020
	Eulumdat LF800S-G5-930R-10 L2 EULUM 231020

Product family datasheet

	Eulumdat LF800S-G5-930R-10 L2 EULUM 231020
	IES data LF800S-G5-930R-10 L2 IES data 231020
	IES data LF800S-G5-930R-10 L2 IES data 231020
	Eulumdat LF800S-G5-935R-10 L2 EULUM 231020
	Eulumdat LF800S-G5-935R-10 L2 EULUM 231020
	IES data LF800S-G5-935R-10 L2 IES data 231020
	IES data LF800S-G5-935R-10 L2 IES data 231020
	Eulumdat LF800S-G5-940R-10 L2 EULUM 231020
	Eulumdat LF800S-G5-940R-10 L2 EULUM 231020
	IES data LF800S-G5-940R-10 L2 IES data 231020
	IES data LF800S-G5-940R-10 L2 IES data 231020
	Eulumdat LF800S-G5-950R-10 L2 EULUM 231020
	Eulumdat LF800S-G5-950R-10 L2 EULUM 231020
	IES data LF800S-G5-950R-10 L2 IES data 231020
	IES data LF800S-G5-950R-10 L2 IES data 231020
	Eulumdat LF1200S-G5-925R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-925R-05 L1 EULUM 231020
	IES data LF1200S-G5-925R-05 L1 IES data 231020
	IES data LF1200S-G5-925R-05 L1 IES data 231020
	Eulumdat LF1200S-G5-927R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-927R-05 L1 EULUM 231020
	IES data LF1200S-G5-927R-05 L1 IES data 231020
	IES data LF1200S-G5-927R-05 L1 IES data 231020

Product family datasheet

	Eulumdat LF1200S-G5-930R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-930R-05 L1 EULUM 231020
	IES data LF1200S-G5-930R-05 L1 IES data 231020
	IES data LF1200S-G5-930R-05 L1 IES data 231020
	Eulumdat LF1200S-G5-935R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-935R-05 L1 EULUM 231020
	IES data LF1200S-G5-935R-05 L1 IES data 231020
	IES data LF1200S-G5-935R-05 L1 IES data 231020
	Eulumdat LF1200S-G5-940R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-940R-05 L1 EULUM 231020
	IES data LF1200S-G5-940R-05 L1 IES data 231020
	IES data LF1200S-G5-940R-05 L1 IES data 231020
	Eulumdat LF1200S-G5-950R-05 L1 EULUM 231020
	Eulumdat LF1200S-G5-950R-05 L1 EULUM 231020
	IES data LF1200S-G5-950R-05 L1 IES data 231020
	IES data LF1200S-G5-950R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-925R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-925R-05 L1 EULUM 231020
	IES data LF2000S-G5-925R-05 L1 IES data 231020
	IES data LF2000S-G5-925R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-927R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-927R-05 L1 EULUM 231020
	IES data LF2000S-G5-927R-05 L1 IES data 231020

Product family datasheet

	IES data LF2000S-G5-927R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-930R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-930R-05 L1 EULUM 231020
	IES data LF2000S-G5-930R-05 L1 IES data 231020
	IES data LF2000S-G5-930R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-935R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-935R-05 L1 EULUM 231020
	IES data LF2000S-G5-935R-05 L1 IES data 231020
	IES data LF2000S-G5-935R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-940R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-940R-05 L1 EULUM 231020
	IES data LF2000S-G5-940R-05 L1 IES data 231020
	IES data LF2000S-G5-940R-05 L1 IES data 231020
	Eulumdat LF2000S-G5-950R-05 L1 EULUM 231020
	Eulumdat LF2000S-G5-950R-05 L1 EULUM 231020
	IES data LF2000S-G5-950R-05 L1 IES data 231020
	IES data LF2000S-G5-950R-05 L1 IES data 231020

Product family datasheet

Ecodesign regulation information:

ul>This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015. Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.

In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.

In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.

Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172170055	LF800S -G5-822-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169813	LF800S -G5-825-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169837	LF800S -G5-827-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169851	LF800S -G5-830-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169875	LF800S -G5-835-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169899	LF800S -G5-840-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169912	LF800S -G5-850-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169936	LF800S -G5-857-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169950	LF800S -G5-865-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170277	LF1200S -G5-822-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g

Product family datasheet

Logistical Data

4062172170291	LF1200S -G5-825-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170314	LF1200S -G5-827-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170338	LF1200S -G5-830-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170352	LF1200S -G5-835-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170376	LF1200S -G5-840-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170390	LF1200S -G5-850-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170413	LF1200S -G5-857-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170437	LF1200S -G5-865-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170932	LF2000S -G5-822-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172170956	LF2000S -G5-825-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172170970	LF2000S -G5-827-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172170994	LF2000S -G5-830-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171014	LF2000S -G5-835-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171038	LF2000S -G5-840-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171052	LF2000S -G5-850-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171076	LF2000S -G5-857-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171090	LF2000S -G5-865-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172169974	LF800S -G5-922-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172169998	LF800S -G5-925-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170017	LF800S -G5-927-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170031	LF800S -G5-930-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g

Product family datasheet

Logistical Data

4062172169790	LF800S -G5-935-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170079	LF800S -G5-940-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170093	LF800S -G5-950-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170116	LF800S -G5-957-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170130	LF800S -G5-965-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170451	LF1200S -G5-922-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170475	LF1200S -G5-925-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170611	LF1200S -G5-927-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170673	LF1200S -G5-930-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170697	LF1200S -G5-935-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171410	LF1200S -G5-940-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171434	LF1200S -G5-950-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171458	LF1200S -G5-957-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171472	LF1200S -G5-965-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171137	LF2000S -G5-925-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171151	LF2000S -G5-927-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171175	LF2000S -G5-930-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171199	LF2000S -G5-935-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171212	LF2000S -G5-940-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171236	LF2000S -G5-950-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171250	LF2000S -G5-957-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g

Product family datasheet

Logistical Data

4062172171274	LF2000S -G5-965-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172170154	LF800S -G5-925R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170178	LF800S -G5-927R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170192	LF800S -G5-930R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170215	LF800S -G5-935R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170239	LF800S -G5-940R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172170253	LF800S -G5-950R-10 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1917.00 g
4062172171496	LF1200S -G5-925R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171519	LF1200S -G5-927R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171533	LF1200S -G5-930R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171557	LF1200S -G5-935R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171571	LF1200S -G5-940R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171595	LF1200S -G5-950R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171298	LF2000S -G5-925R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171311	LF2000S -G5-927R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171335	LF2000S -G5-930R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171359	LF2000S -G5-935R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171373	LF2000S -G5-940R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g
4062172171397	LF2000S -G5-950R-05 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1429.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.