

TEC Flex Shortpitch 1000

LED modules for semi-professional applications

Product family features

- Flexible and cuttable LED strip
- Luminous flux: up to 1000 lm/m
- Available with color temperature: 2,700K, 3,000 K, 4,000 K, 5,000 K or 6,500 K
- Up to 50,000 hrs lifetime @ tc max
- Recommended in system use with OPTOTRONIC
- Color consistency in 3 SDCM

Product family benefits

- High homogeneity thanks to small LED pitch
- Pre-wired LED strip, simple and quick plug-and-play installation
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Type of protection: IP00
- Dimmable (with suitable PWM dimming methods)

Areas of application

- Shelf lighting for retail, shops, supermarkets
- For use in architectural, shop and interior luminaires
- Offices, corridors and residential interiors
- Architectural Integration – e.g. coves, walls



Product family datasheet

Technical data

Electrical data

Product description	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to
TF1000S-G1 -827-05	24.0 V	DC	9.0 W	45.00 W	23...25 V	25 V
TF1000S-G1 -830-05	24.0 V	DC	9.0 W	45.00 W	23...25 V	25 V
TF1000S-G1 -840-05	24.0 V	DC	9.0 W	45.00 W	23...25 V	25 V
TF1000S-G1 -850-05	24.0 V	DC	9.0 W	45.00 W	23...25 V	25 V
TF1000S-G1 -865-05	24.0 V	DC	9.0 W	45.00 W	23...25 V	25 V
TF1000S-G1 -927-05	24.0 V	DC	9.9 W	49.50 W	23...25 V	25 V
TF1000S-G1 -930-05	24.0 V	DC	9.9 W	49.50 W	23...25 V	25 V
TF1000S-G1 -935-05	24.0 V	DC	9.9 W	49.50 W	23...25 V	25 V
TF1000S-G1 -940-05	24.0 V	DC	9.9 W	49.50 W	23...25 V	25 V

Photometrical data

Product description	Light color LED	Color rendering index Ra	Luminous flux per meter	Total useful luminous flux	Luminous efficacy	Standard deviation of color matching
TF1000S-G1 -827-05	White	80	1070 lm	5350 lm	118.9 lm/W	≤3 sdc
TF1000S-G1 -830-05	White	80	1130 lm	5650 lm	125.6 lm/W	≤3 sdc
TF1000S-G1 -840-05	White	80	1140 lm	5700 lm	126.7 lm/W	≤3 sdc
TF1000S-G1 -850-05	White	80	1170 lm	5850 lm	130 lm/W	≤3 sdc
TF1000S-G1 -865-05	White	80	1150 lm	5750 lm	127.8 lm/W	≤3 sdc
TF1000S-G1 -927-05	White	90	1015 lm	5075 lm	102.5 lm/W	≤3 sdc
TF1000S-G1 -930-05	White	90	1085 lm	5425 lm	109.6 lm/W	≤3 sdc
TF1000S-G1 -935-05	White	90	1090 lm	5450 lm	110.1 lm/W	≤3 sdc
TF1000S-G1 -940-05	White	90	1095 lm	5475 lm	110.6 lm/W	≤3 sdc
Product description	Light color (designation)					
TF1000S-G1 -827-05	White					
TF1000S-G1 -830-05	White					
TF1000S-G1 -840-05	White					
TF1000S-G1 -850-05	White					
TF1000S-G1 -865-05	White					
TF1000S-G1 -927-05	2700 K					
TF1000S-G1 -930-05	3000 K					
TF1000S-G1 -935-05	3500 K					
TF1000S-G1 -940-05	4000 K					

Light technical data

Product description	Starting time	Warm-up time (60 %)
TF1000S-G1 -827-05	< 0.5 s	0.00 s
TF1000S-G1 -830-05	< 0.5 s	0.00 s
TF1000S-G1 -840-05	< 0.5 s	0.00 s
TF1000S-G1 -850-05	< 0.5 s	0.00 s
TF1000S-G1 -865-05	< 0.5 s	0.00 s
TF1000S-G1 -927-05	< 0.5 s	< 0.50 s
TF1000S-G1 -930-05	< 0.5 s	< 0.50 s
TF1000S-G1 -935-05	< 0.5 s	< 0.50 s
TF1000S-G1 -940-05	< 0.5 s	< 0.50 s


LED module information

Product description	Number of LEDs per meter	Number of LEDs per smallest unit
TF1000S-G1 -827-05	140	7
TF1000S-G1 -830-05	140	7
TF1000S-G1 -840-05	140	7
TF1000S-G1 -850-05	140	7
TF1000S-G1 -865-05	140	7
TF1000S-G1 -927-05	140	7
TF1000S-G1 -930-05	140	7
TF1000S-G1 -935-05	140	7
TF1000S-G1 -940-05	140	7

Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Product weight
TF1000S-G1 -827-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -830-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -840-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -850-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -865-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -927-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -930-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -935-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g
TF1000S-G1 -940-05	5000 mm	50.0 mm	8.00 mm	1.50 mm	69.00 g

Product line drawing

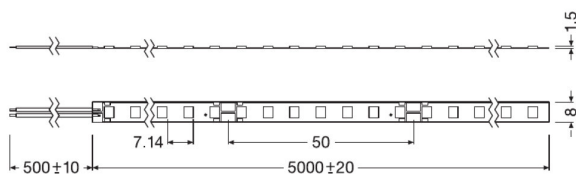

TF1000S-G1 -827-05, TF1000S-G1 -830-05, TF1000S-G1 -840-05, TF1000S-G1 -850-05, TF1000S-G1 -865-05

Temperatures & operating conditions

Product description	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range	Temperature range at storage
TF1000S-G1 -827-05	35 °C	-25...80 °C	-20...+50 °C	-30...85 °C
TF1000S-G1 -830-05	35 °C	-25...80 °C	-20...+50 °C	-30...85 °C
TF1000S-G1 -840-05	35 °C	-25...80 °C	-20...+50 °C	-30...85 °C
TF1000S-G1 -850-05	35 °C	-25...80 °C	-20...+50 °C	-30...85 °C
TF1000S-G1 -865-05	35 °C	-25...80 °C	-20...+50 °C	-30...85 °C
TF1000S-G1 -927-05	47 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TF1000S-G1 -930-05	47 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TF1000S-G1 -935-05	47 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TF1000S-G1 -940-05	47 °C	-25...80 °C	-25...+50 °C	-30...85 °C

Product family datasheet

Lifespan

Product description	Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time	Number of switching cycles
TF1000S-G1 -827-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -830-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -840-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -850-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -865-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -927-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -930-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -935-05	50000 h	50000 h	0.70	30000
TF1000S-G1 -940-05	50000 h	50000 h	0.70	30000

Additional product data

Product description	Predecessor EAN	ID of contained light source [GMS]
TF1000S-G1 -827-05	4062172091282	LS_SHZ_600335
TF1000S-G1 -830-05	4062172091305	LS_SHZ_600336
TF1000S-G1 -840-05	4062172091329	LS_SHZ_600337
TF1000S-G1 -850-05	4062172091442	LS_SHZ_600338
TF1000S-G1 -865-05	4062172091503	LS_SHZ_600339
TF1000S-G1 -927-05		LS_SHZ_601057
TF1000S-G1 -930-05		LS_SHZ_601058
TF1000S-G1 -935-05		LS_SHZ_601059
TF1000S-G1 -940-05		LS_SHZ_601060

Capabilities

Product description	Lowest bending radius	Self-adhesive	With connection set
TF1000S-G1 -827-05	20 mm	Yes	No
TF1000S-G1 -830-05	20 mm	Yes	No
TF1000S-G1 -840-05	20 mm	Yes	No
TF1000S-G1 -850-05	20 mm	Yes	No
TF1000S-G1 -865-05	20 mm	Yes	No
TF1000S-G1 -927-05	20 mm	Yes	No
TF1000S-G1 -930-05	20 mm	Yes	No
TF1000S-G1 -935-05	20 mm	Yes	No
TF1000S-G1 -940-05	20 mm	Yes	No

Product description	With end piece
TF1000S-G1 -827-05	No
TF1000S-G1 -830-05	No
TF1000S-G1 -840-05	No
TF1000S-G1 -850-05	No

Product family datasheet

Product description	With end piece
TF1000S-G1 -865-05	No
TF1000S-G1 -927-05	No
TF1000S-G1 -930-05	No
TF1000S-G1 -935-05	No
TF1000S-G1 -940-05	No

Certificates & standards

Product description	Energy consumption	Standards	Type of protection	Energy efficiency class of the contained light source
TF1000S-G1 -827-05	50 kWh/1000h	CE/ENEC/EAC	IP00	E
TF1000S-G1 -830-05	50 kWh/1000h	CE/ENEC/EAC	IP00	E
TF1000S-G1 -840-05	50 kWh/1000h	CE/ENEC/EAC	IP00	E
TF1000S-G1 -850-05	50 kWh/1000h	CE/ENEC/EAC	IP00	E
TF1000S-G1 -865-05	50 kWh/1000h	CE/ENEC/EAC	IP00	E
TF1000S-G1 -927-05		CE/ENEC/EAC/SASO 2927:2019	IP00	F
TF1000S-G1 -930-05		CE/ENEC/EAC/SASO 2927:2019	IP00	F
TF1000S-G1 -935-05		CE/ENEC/EAC/SASO 2927:2019	IP00	F
TF1000S-G1 -940-05		CE/ENEC/EAC/SASO 2927:2019	IP00	F

Logistical data

Product description	Commodity code
TF1000S-G1 -827-05	853951000000
TF1000S-G1 -830-05	853951000000
TF1000S-G1 -840-05	853951000000
TF1000S-G1 -850-05	853951000000
TF1000S-G1 -865-05	853951000000
TF1000S-G1 -927-05	853951000000
TF1000S-G1 -930-05	853951000000
TF1000S-G1 -935-05	853951000000
TF1000S-G1 -940-05	853951000000

Product family datasheet

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TF1000S-G1 -827-05	18-04-2022	4062172133968	No declarable substances contained
TF1000S-G1 -830-05	18-04-2022	4062172133982	No declarable substances contained
TF1000S-G1 -840-05	18-04-2022	4062172134002	No declarable substances contained
TF1000S-G1 -850-05	18-04-2022	4062172134026	No declarable substances contained
TF1000S-G1 -865-05	18-04-2022	4062172134040	No declarable substances contained
TF1000S-G1 -927-05	18-04-2022	4062172250382	No declarable substances contained
TF1000S-G1 -930-05	18-04-2022	4062172250405	No declarable substances contained
TF1000S-G1 -935-05	18-04-2022	4062172250429	No declarable substances contained
TF1000S-G1 -940-05	18-04-2022	4062172250443	No declarable substances contained

Product description	Declaration No. in SCIP database
TF1000S-G1 -827-05	No declarable substances contained
TF1000S-G1 -830-05	No declarable substances contained
TF1000S-G1 -840-05	No declarable substances contained
TF1000S-G1 -850-05	No declarable substances contained
TF1000S-G1 -865-05	No declarable substances contained
TF1000S-G1 -927-05	No declarable substances contained
TF1000S-G1 -930-05	No declarable substances contained
TF1000S-G1 -935-05	No declarable substances contained
TF1000S-G1 -940-05	No declarable substances contained

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Drivers and dimmers: wide selection of OPTOTRONIC 24 V DALI, DMX and BLE

Product family datasheet

Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction TEC Flex IP00
	Product Datasheet TEC Flex Shortpitch IP00 Product Datasheet (EN)
	Brochures Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certificates TFX ENEC 130520
	Declarations of conformity TECFlex CE 4210017 300420
	CAD data DWG TEC Flex and TEC Flex Shortpitch
	Eulumdat TF1000S G1 827 LDT 291121
	Eulumdat TF1000S-G1-827 LTD 130122
	IES data TF1000S G1 827 IES 291121
	IES data TF1000S-G1-827 IES 130122
	Eulumdat TF1000S G1 830 LDT 291121
	Eulumdat TF1000S-G1-830 LTD 130122
	IES data TF1000S G1 830 IES 291121
	IES data TF1000S-G1-830 IES 130122
	Eulumdat TF1000S G1 840 LDT 291121
	Eulumdat TF1000S-G1-840 LTD 130122

Product family datasheet



IES data
TF1000S G1 840 IES 291121



IES data
TF1000S-G1-840 IES 130122



Eulumdat
TF1000S G1 850 LDT 291121



Eulumdat
TF1000S-G1-850 LTD 130122



IES data
TF1000S G1 850 IES 291121



IES data
TF1000S-G1-850 IES 130122



Eulumdat
TF1000S G1 865 LDT 291121



Eulumdat
TF1000S-G1-865 LTD 130122



IES data
TF1000S G1 865 IES 291121



IES data
TF1000S-G1-865 IES 130122



Eulumdat
TF1000S-G1-927 LTD 130122



IES data
TF1000S-G1-927 IES 130122



Eulumdat
TF1000S-G1-930 LTD 130122



IES data
TF1000S-G1-930 IES 130122



Eulumdat
TF1000S-G1-935 LTD 130122



IES data
TF1000S-G1-935 IES 130122



Eulumdat
TF1000S-G1-940 LTD 130122



IES data
TF1000S-G1-940 IES 130122

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172133968	TF1000S-G1 -827-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172133982	TF1000S-G1 -830-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172134002	TF1000S-G1 -840-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172134026	TF1000S-G1 -850-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172134040	TF1000S-G1 -865-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172250382	TF1000S-G1 -927-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172250405	TF1000S-G1 -930-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172250429	TF1000S-G1 -935-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g
4062172250443	TF1000S-G1 -940-05	Shipping carton box 10	225 mm x 240 mm x 120 mm	6.48 dm ³	1344.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product family datasheet

Accessories Optional

Product description	Accessory name	Accessory code
TF1000S-G1 -827-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -827-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -827-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -827-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -827-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -827-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -827-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -827-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -827-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -827-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -827-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -827-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -827-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -827-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -827-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -827-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -827-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -830-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -830-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -830-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -830-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -830-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -830-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -830-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -830-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -830-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -830-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -830-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -830-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -830-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -830-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -830-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -830-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -830-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -840-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -840-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614

Product family datasheet

TF1000S-G1 -840-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -840-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -840-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -840-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -840-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -840-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -840-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -840-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -840-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -840-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -840-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -840-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -840-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -840-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -840-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -850-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -850-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -850-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -850-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -850-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -850-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -850-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -850-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -850-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -850-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -850-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -850-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -850-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -850-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -850-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -850-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -850-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -865-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -865-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -865-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -865-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -865-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -865-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667

Product family datasheet

TF1000S-G1 -865-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -865-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -865-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -865-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -865-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -865-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -865-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -865-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -865-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -865-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -865-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -927-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -927-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -927-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -927-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -927-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -927-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -927-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -927-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -927-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -927-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -927-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -927-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -927-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -927-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -927-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -927-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -927-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -930-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -930-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -930-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -930-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -930-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -930-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -930-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -930-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -930-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -930-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841

Product family datasheet

TF1000S-G1 -930-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -930-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -930-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -930-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -930-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -930-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -930-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -935-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -935-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -935-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -935-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -935-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -935-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -935-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -935-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -935-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -935-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -935-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -935-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -935-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -935-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF1000S-G1 -935-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -935-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -935-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TF1000S-G1 -940-05	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
TF1000S-G1 -940-05	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
TF1000S-G1 -940-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF1000S-G1 -940-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TF1000S-G1 -940-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF1000S-G1 -940-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF1000S-G1 -940-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TF1000S-G1 -940-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TF1000S-G1 -940-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF1000S-G1 -940-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TF1000S-G1 -940-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF1000S-G1 -940-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF1000S-G1 -940-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF1000S-G1 -940-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008

Product family datasheet

TF1000S-G1 -940-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF1000S-G1 -940-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF1000S-G1 -940-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.