

NO – «Dark Light» taklampe med redusert blanding på grunn av inntrukne LED dioder. Sensor styrt, deteksjonsområde 5-7meter. Leveres med hurtigkobling for rask og enkel montering.

EN - «Dark Light» Anti-glare LED ceiling lamp reduces glare index due to how the LED is placed. Sensor controlled with detection area 5-7m. Quick connection, slim and nice design enables wide use.

DE - «Blendfrei» Deckenleuchte mit Blendreduzierung durch tief eingelassene LED-Dioden. Aufregendes Design, niedrige Bauhöhe und schnellverbinder für eine schnelle und einfache montage.


Tilkobling/Connection/Verbindung:

200/240VAC 50Hz

15W +/- 1W

Lys/Licht/Light:

LED, Genesis

1650Lm / 3000Kelvin

100°

CRI>80

Beskyttelse/Protection/Schutz:

IP 40, Klasse II

Montering/Assenbly/Montage:

Surface mount / Ceiling box 83mm / Oberfläche

Hurtigklemme / Quick connector /

Schnellverbinder



Sensor:

Detection area 5-7m.

Forsinkelse / Delay / Verzögerung - 3 min

Mål/Dimension/Abmessungen:


Ø:300mm H:33mm

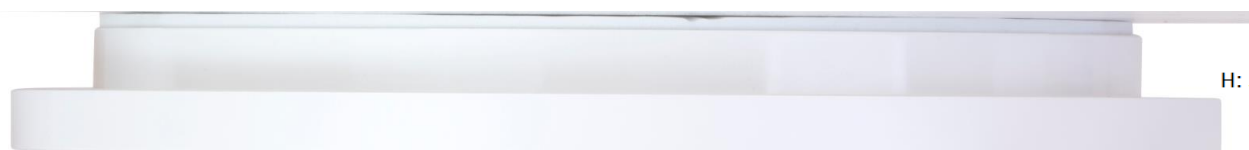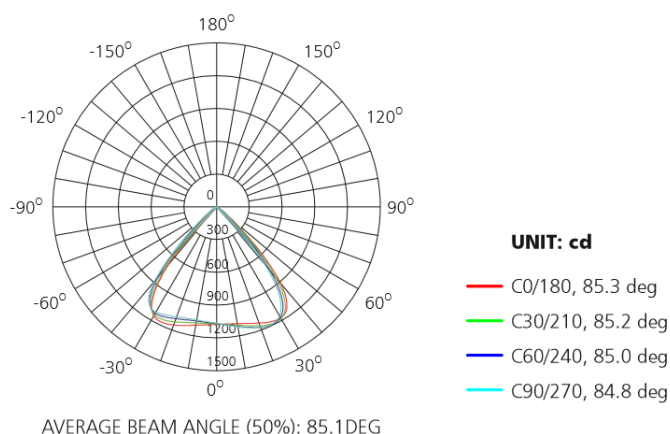
Polar Diagram Comparison


H: 33mm

Ø: 300mm


Installation

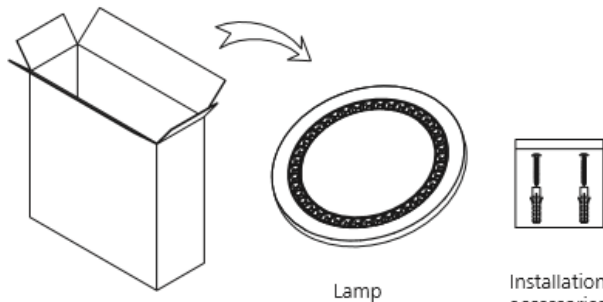

1


Lamp

Installation accessories

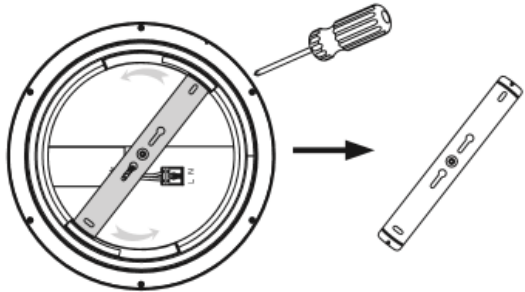


2

Pull out the bracket anticlockwise by screw driver, take out the bracket.

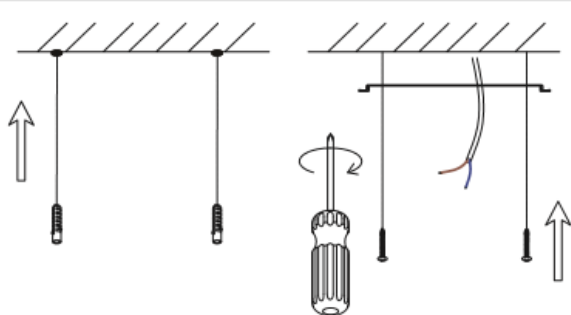


3

Knock the plastic anchor into ceiling, fix the bracket with screws on the ceiling.

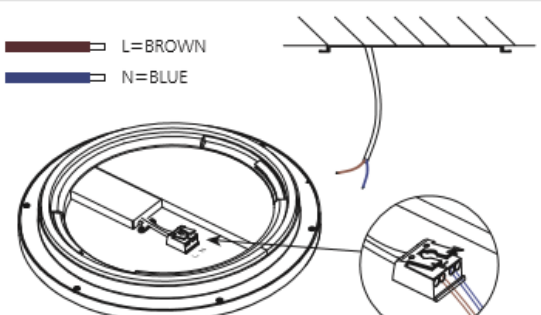


4

Wire "L""N" to terminal block.

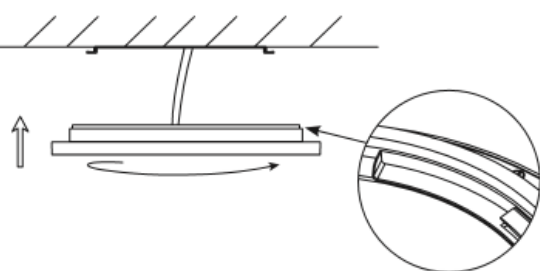

5

Push the lamp upward and rotate it into bracket. Rotate the lamp clockwise until it is firmly fixed.

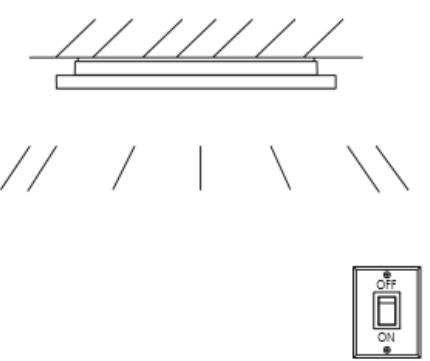

6

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	QTY(PCS)
Carton	42*33*33	0.88	9.7	10