


**PHILIPS**

Lighting

Tailored creations


# KT Serie

Configuration code: KT-PT-20S-840-PSU-OC-BK402-T102-WH

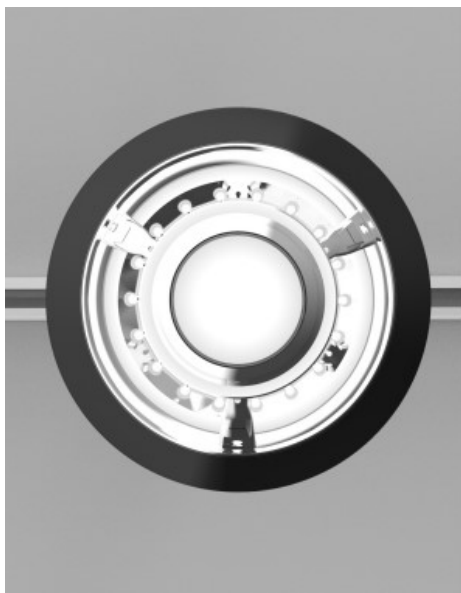

Housing color	BK402 Satin Black (9004)
Housing texture	T102 Layered Fine
Mounting	Pendant track-mounted (PT)
Driver	Non Dimming with through wiring, DC feature for track mounted
Optional Accessories	UGR19 Shield Combination of UGR19 shield and PCO opal cover is not possible.
Mounting color	Adaptor White
CCT	4000K, Ra 80+
Lumen	2000 Lumen
Ambient temperature range	10 degrees Celcius to 40 degrees Celcius
Certifications	CE, RoHS
Glow wire test	650 degrees Celcius
Lifetime (hours)	50,000 hours for L80 @ T ambient 25 degrees
Warranty	5 years
Power Factor	Min 0.9
IP rating	IP20
IK rating	IK02
Weight	Max 2.9 kg

[Your configuration](#)

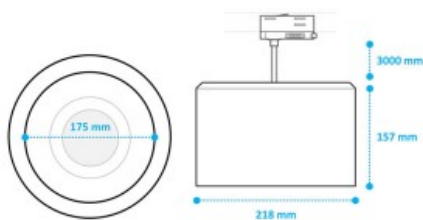

© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.



For more information, please visit: [www.tailored.lighting.philips.com](http://www.tailored.lighting.philips.com)  
Be sure to select your country