



η_{ef} (lm/W)
131-147



EB

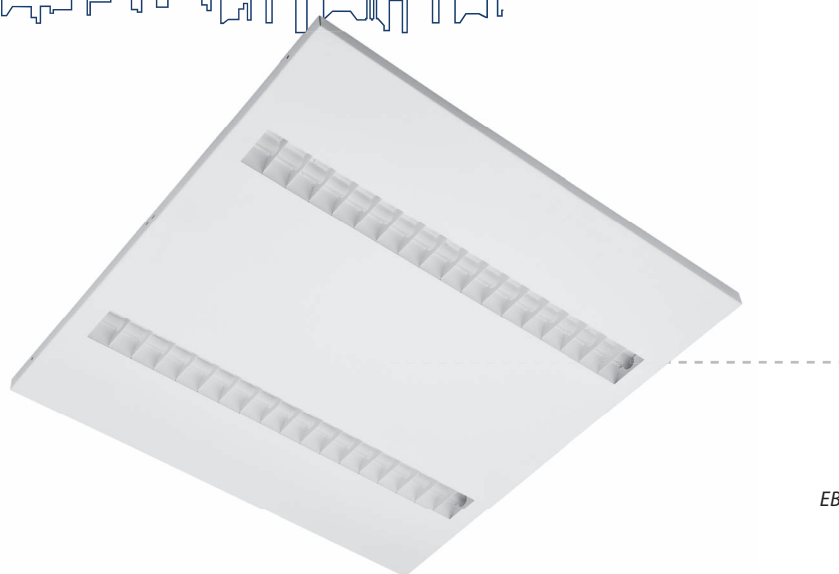

EB

Recessed LED fitting

Body:

White painted metal sheet

Optic:

White painted louvre with opal cover of LED modules

Version (body shape)

EB A 600 (625) – square 600x600 mm (625x625)

Application:

– recessed installation into modular ceiling 600 or 625 mm.

Using accessories the panel can be also installed as surface or recessed into a gypsum plasterboard.

Accessories:

UQRAM – white painted aluminium frame for surface installation

QVESTRAM – white painted aluminium frame for recessed installation into a gypsum plasterboard

VESTRAMA600 – white painted metal frame for recessed installation into gypsum plasterboard ceiling

NM – independent emergency module

2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	○	○	○	✗	●
●	○	○	○	○	○	✗	○	○

● default

○ optional

✗ not possible

	W	lm	600		625		C	kg
			A	B	A	B		
EB3000A	19	2 800	596	596	622	622	23	2,2
EB4000A	26	3 800						
EB6000A	42	5 500						

lm - luminaire light output

