



SPMN

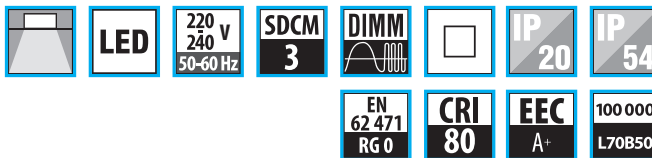

η_{ef} (lm/W)
83-100



SPMN190

Recessed round fittings

Body:

White painted (RAL 9003) metal sheet

Optic:

Translucent acrylic layer with a microprismatic cover

Application:

Recessed installation into gypsum or raster ceiling

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	×	×	×
●	×	○	×	×	×	×	○	×

● default

○ optional

×

SPMN	W	lm		Ø	C		kg
		KO	KN				
SPMN1000 E190	12	1 100	1 200	210	46	190	0,9
SPMN1500 E190	18	1 500	1 600				
SPMN3000 E370	28	2 450	2 600	390		370	2
SPMN4000 E370	36	3 200	3 400				

lm - luminaire light output

