



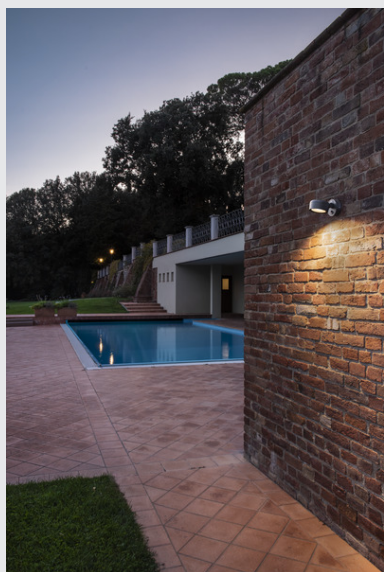

ESKINA SENSOR

Outdoor surface-mounted wall and ceiling light, anthracite, 3000/4000K, IP54, dimmable

A new family in the SLV lighting world! We are providing you with an integrated outdoor lighting solution with the ESKINA family. Regardless of whether it is a floor stand, a wall and ceiling light or a display fitting. You will find the right light for any application. All of the luminaires can be operated with 3000 K or 4000 K. Versions with motion sensors are also available.



TECHNICAL DATA

Item no.	1002904
Rotating or tilting	rotary Bar and tiltable
IP Code	IP 54
Impact resistance class	IK 02
Impact resistance	0.2 Joule
Assembly	Surface
Assembly details	Ceiling, Wall
Dimmable	Yes
Dimming technology	trailing edge
Number of through-wires	20
Primary nominal voltage	220-240V ~50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	14.5 W
Ambient temperature	25 °C
Level of inrush current	30 A
Duration of inrush current	40 µs
Stroboscopic effect (SVM)	0.05
Lumen	1000 lm
Colour temperature	3000/4000 Kelvin
Beam angle	95 °
Color	anthracite

Light Source

916405	
--------	---

CRI	80
LXXBXX data	L70B50
Service life	36000 h
Light distribution	rotational symmetric
Light outlet	direct
Height	22.3 cm
Diameter	13.8 cm
Net weight	1.291 kg
Gross weight	1.604 kg
BIG WHITE Page	682