


Sensor-switched outdoor light

L 170 S

EAN 4007841 645311

STEINEL®
Intelligent technology



max.100w



infrared sensor
180°



max. 12 m



IP44



2 - 2000 lux



5 sec - 15 min



manual override



ideal 2 m



energy saving

3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie

manufacture's
warranty
steinel.de/garantie

Function description

Modern lantern. Classic outdoor SensorLight L 170 S, ideal for prestigious outdoor spaces, 180° angle of coverage, reach can be set up to 12 m or up to 5 m, stainless-steel trim panel, basic light-level function and soft light start.

Technical specifications

Dimensions (L x W x H)	340 x 220 x 150 mm
Mains power supply	230 – 240 V / 60 Hz
Mounting height max.	4,00 m
Sensor Technology	passive infrared
Output	100 W
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	180 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No

Reach, radial	r = 5 m (39 m²)
Reach, tangential	r = 12 m (226 m²)
Photo-cell controller	Yes
Twilight setting	2 – 200 lx
Time setting	5 s – 15 Min.
Soft light start	Yes
Continuous light	selectable, 4h
IP rating	IP43
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Stainless steel
Cover material	Glass transparent
Manufacturer's Warranty	3 years
PU1, EAN	4007841645311

Accessories

EAN 4007841 002190	Replacement base unit for L 170 / L 190 S
EAN 4007841 001513	Replacement glass shade for L 170 S


Sensor-switched outdoor light

L 170 S

EAN 4007841 645311



Detection Zone

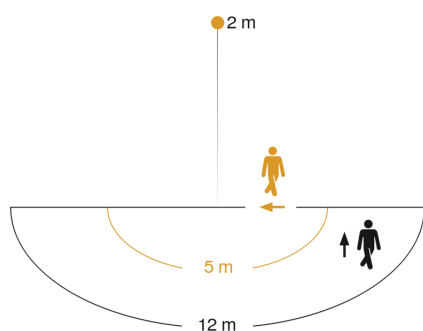

Mögliche Montagehöhe: –
Orange: radial
Schwarz: tangential