

GE TUNGSRAMTM

Innovation is our heritage
EST. 1896



A+
energy class

106
lumens/watt


BTA Panel

BTA22-3665-7S-T-L

93040561

Product information

The BTA LED Panel Luminaire is a commercial luminaire utilising a LED optical system to achieve superior performance. It provides high uniformity, excellent efficiency and reduced glare in T-grid ceiling applications.

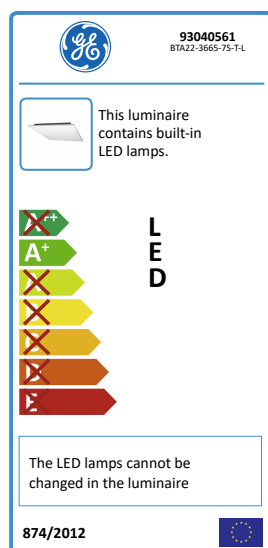

Product data

Mounting type	Recessed
Brand	GE Lighting
IP Rating	20
Certifications	CE
Body colour	White
Weight [kg]	4,10
DIALux description	TUNGSRAM - BTA Panel - 3800lm - 36W - 6500K - 80CRI - 93040561[SKU] - Recessed
IEC protection classes	Class II
Dimensions	595x595x82mm
Energy efficiency class (EEC)	A+

Performance data

Rated life L70/B50 [h]	50000
Operating Voltage	220-240V
Ambient Temperature [°C]	0°C to +40°C
Rated efficacy [lm/W]	108
Total system power	36
Nominal lumens [lm]	3800
Rated lumens [lm]	3800
Rated power [W]	36
Nominal correlated colour temperature (CCT) [K]	6500
Colour rendering index (CRI) [Ra]	80+
UGR value	UGR21

Optical data

Nominal beam angle [°]	120°
------------------------	------


Electrical data

Nominal lamp power factor	0.9
Controllability	Not dimmable electronic (Static)

Logistic data

Product status	Available
Shipment	Standard

Photometric Data

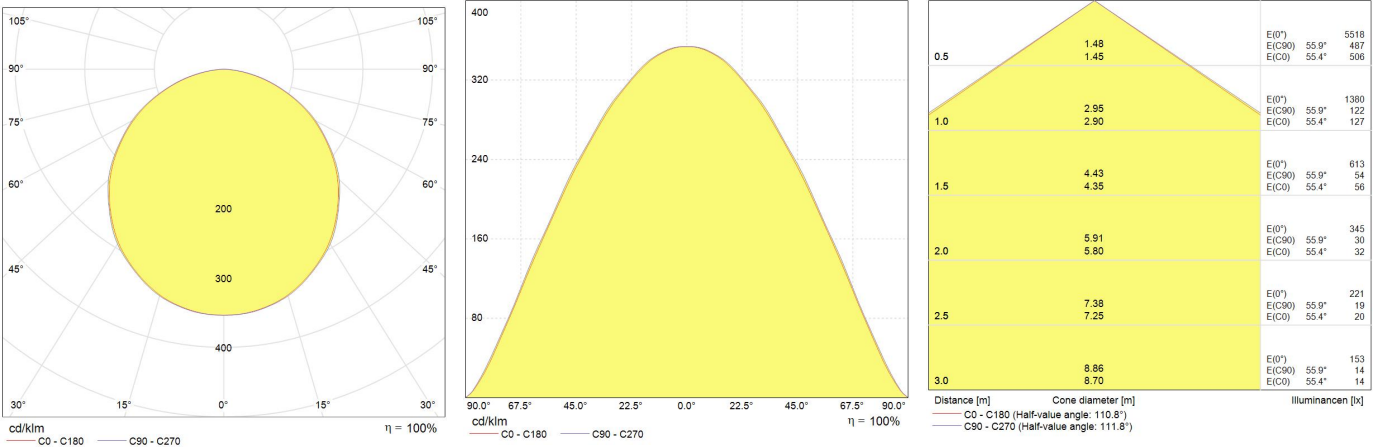

Downloads & Links

- [Go to the catalog site \(HTTP\)](#)
- [Datasheet \(PDF\)](#)
- [Data sheet \(PDF\)](#)
- [Images \(HTTP\)](#)
- [DoC Document \(PDF\)](#)
- [DoC Document - EU \(PDF\)](#)