



GE  
Lighting



## LED Slim Downlight DSTW8-2240-7DR-ST

# 93071396



### Product information

GE Lighting introduces the new standard range of LED Slim Recessed Downlighters. There are a selection of sizes and colour temperature options to meet customer requirements. With this new extra slim range lighting can be upgraded in key segments such as office, commercial buildings, retail backoffice, hospitality. Easy choice to make switch to LED and benefit from energy saving and long life time.

### Application areas




Hospitality



Office



Retail

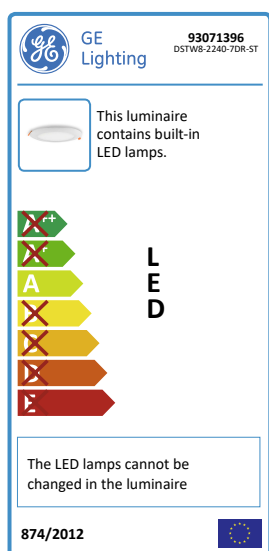

## Product data

|                               |   |
|-------------------------------|---|
| Mounting type                 | Recessed  |
| Dimensions                    | Ø240x30mm   |
| Energy efficiency class (EEC) | A   |
| IP Rating                     | 40  |
| Certifications                | CE  |
| Weight [kg]                   | 0,65  |
| DIALux description            | GE - LED Slim Downlight - 2000lm - 22W - 4000K - 80CRI - 93071396[SKU] - Recessed |
| Dimmability                   | YES   |
| Body colour                   | White   |
| IP Rating for Driver          | 20  |

## Performance data

|   |              |
|---|--------------|
| Operating Voltage                               | 220-240V     |
| Ambient Temperature [°C]                        | -10 to +40   |
| Rated efficacy [lm/W]                           | 91           |
| Current [A]                                     | 115mA        |
| Total system power                              | 22           |
| Nominal lumens [lm]                             | 2000         |
| Rated lumens [lm]                               | 2000         |
| Rated power [W]                                 | 22           |
| Rated life [h]                                  | 45 000 / L70 |
| Nominal correlated colour temperature (CCT) [K] | 4000         |
| Colour rendering index (CRI) [Ra]               | 80           |

## Optical data

|                        |          |
|------------------------|----------|
| Nominal beam angle [°] | 110+/-12 |
|------------------------|----------|


## Electrical data

|                           |                            |
|---------------------------|----------------------------|
| Nominal lamp power factor | >0,9                       |
| Class                     | Class II                   |
| Controllability           | Dimmable electronic (DALI) |

## Logistic data

|                |           |
|----------------|-----------|
| Product status | Available |
| Pack quantity  | 1         |

## Photometric Data

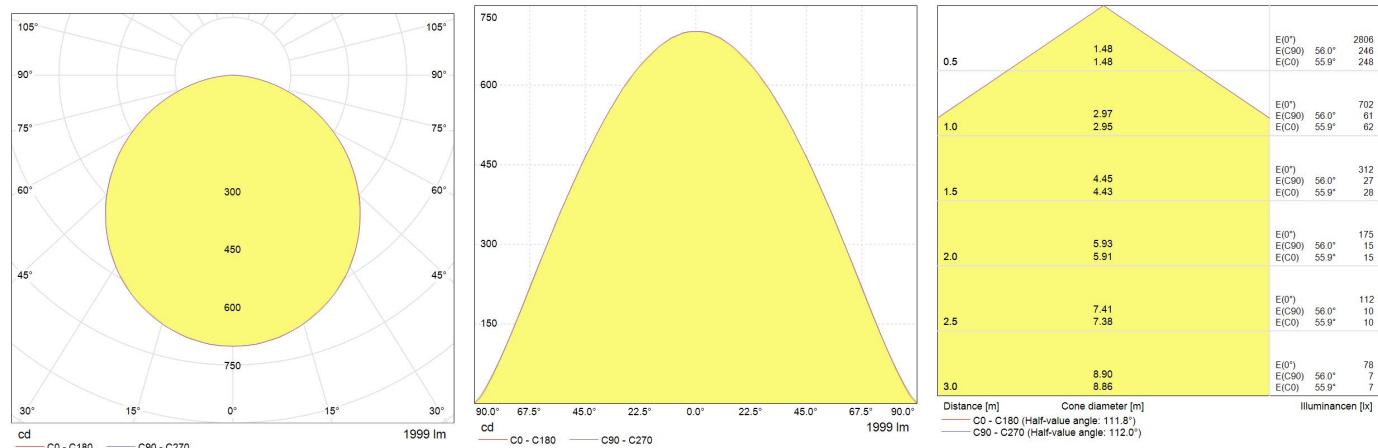

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)