




GE
Lighting



LED Slim Downlight DSTW8-2265-7DR-ST

93071397



Product information

GE Lighting introduces the new standard range of LED Slim Recessed Downlighters. There are a selection of sizes and colour temperature options to meet customer requirements. With this new extra slim range lighting can be upgraded in key segments such as office, commercial buildings, retail backoffice, hospitality. Easy choice to make switch to LED and benefit from energy saving and long life time.

Application areas




Hospitality



Office



Retail

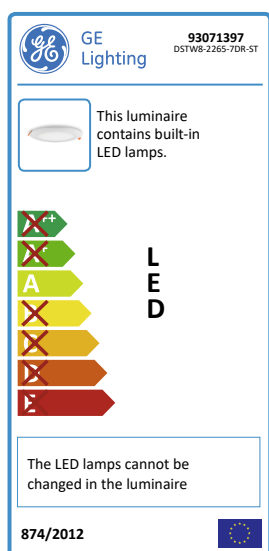

Product data

Mounting type	Recessed
Dimensions	Ø240x30mm
Energy efficiency class (EEC)	A
IP Rating	40
Certifications	CE
Weight [kg]	0,65
DIALux description	GE - LED Slim Downlight - 2000lm - 22W - 6500K - 80CRI - 93071397[SKU] - Recessed
Dimmability	YES
Body colour	White
IP Rating for Driver	20

Performance data

Operating Voltage	220-240V
Ambient Temperature [°C]	-10 to +40
Rated efficacy [lm/W]	91
Current [A]	115mA
Total system power	22
Nominal lumens [lm]	2000
Rated lumens [lm]	2000
Rated power [W]	22
Rated life [h]	45 000 / L70
Nominal correlated colour temperature (CCT) [K]	6500
Colour rendering index (CRI) [Ra]	80

Optical data

Nominal beam angle [°]	110+/-12
------------------------	----------


Electrical data

Nominal lamp power factor	>0,9
Class	Class II
Controllability	Dimmable electronic (DALI)

Logistic data

Product status	Available
Pack quantity	1

Photometric Data

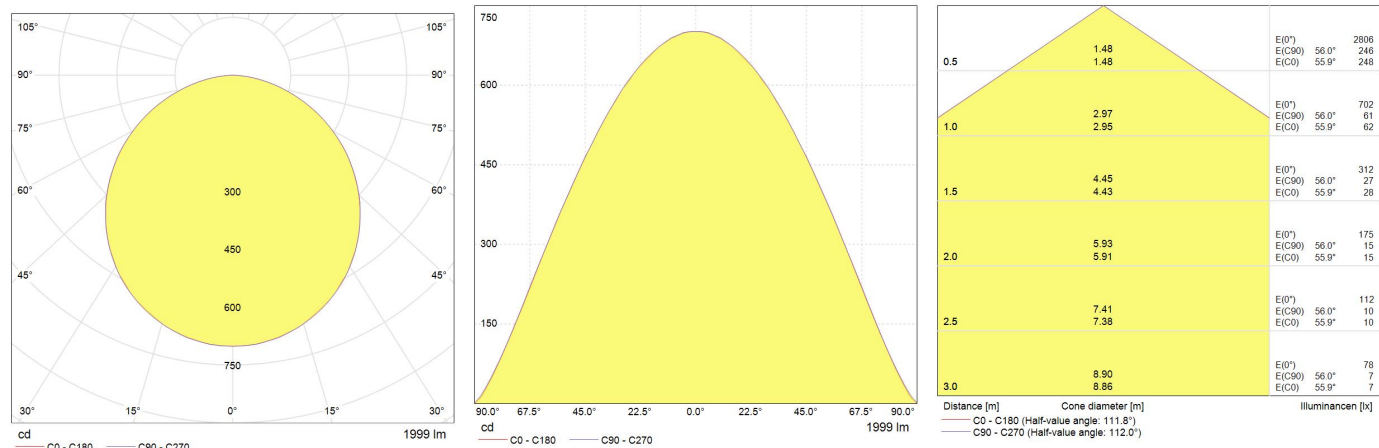

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)