

TUNGSRAMTM

Innovation is our heritage
EST. 1896



A+
energy class

90
lumens/watt


Integrated Bulkhead

LED Bulkhead G1 TU D30 24W 830 S
EMN

93108100

Product information

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

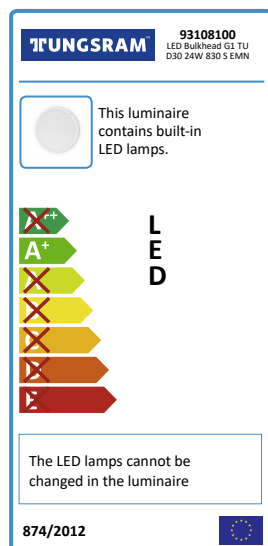

Product data

Mounting type	Wall mounted
Brand	TUNGSRAM
IP Rating	65
Certifications	CE/EAC
Body colour	White
Impact resistance	IK10
Weight [kg]	1.20
DIALux description	TUNGSRAM - Integrated Bulkhead - 2150lm - 24W - 3000K - 80CRI - 93108100[SKU] - Wall mounted
IEC protection classes	Class II
Impact resistance (IK)	IK10
Dimensions	ø300x109mm
Energy efficiency class (EEC)	A+

Performance data

Operating Voltage	220-240V
Ambient Temperature [°C]	-30°C to +25°C
Rated efficacy [lm/W]	90
Total system power	24
Nominal lumens [lm]	2150
Rated lumens [lm]	2150
Rated power [W]	24
Rated life [h]	45000
Nominal correlated colour temperature (CCT) [K]	3000
Colour rendering index (CRI) [Ra]	80+

Optical data

Nominal beam angle [°]	125°±12°
------------------------	----------


Electrical data

Nominal lamp power factor	0.9
Controllability	Not dimmable electronic (Static)

Logistic data

Product status	Available
Shipment	Standard

Photometric Data

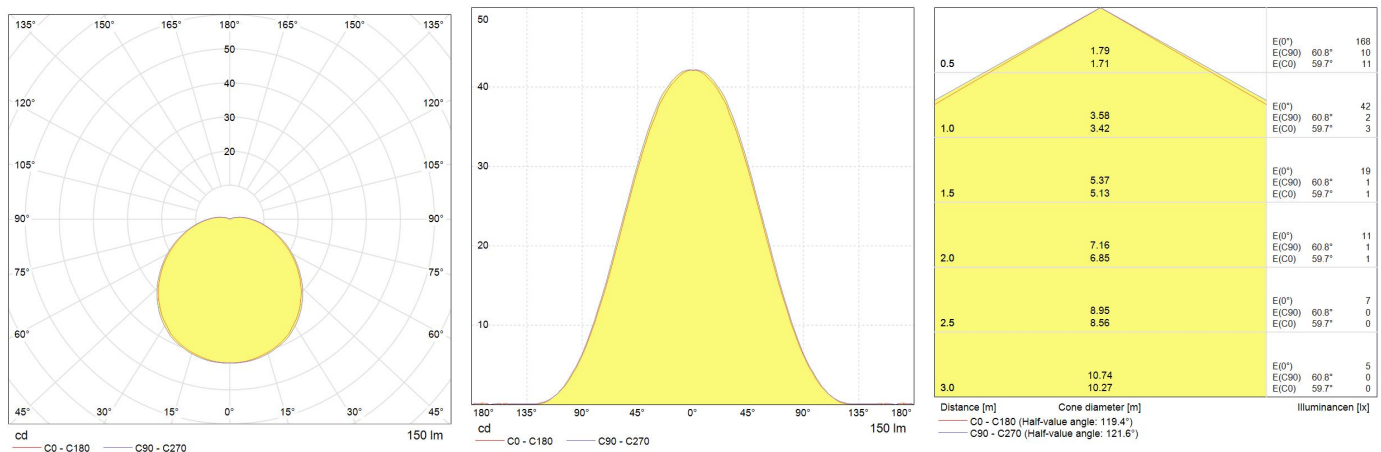

Downloads & Links

- [Go to the catalog site \(HTTP\)](#)
- [Datasheet - TUNGSRAM \(PDF\)](#)
- [Datasheet - GE Lighting \(PDF\)](#)
- [Installation guide \(PDF\)](#)
- [Images \(HTTP\)](#)
- [Photometry files for EMERGENCY versions \(HTTP\)](#)