








LINEAR IndiviLED® DALI






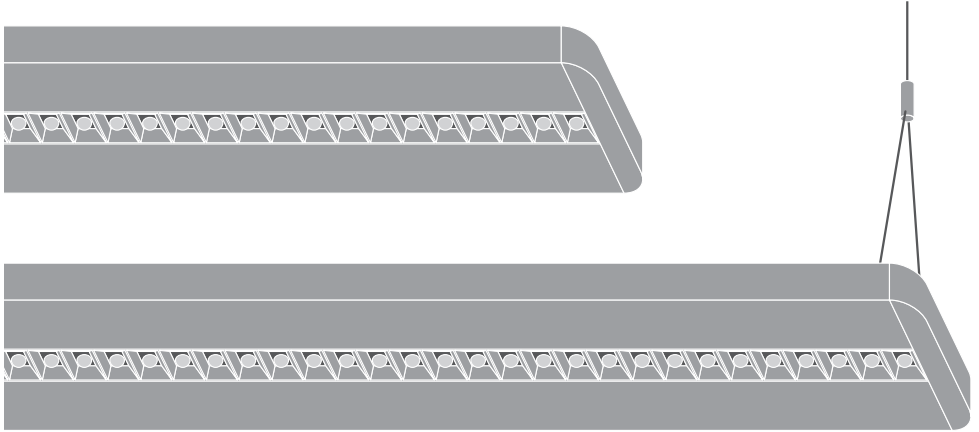






	EAN	l x w x h [mm]	W	W (230 V DC)	lm	lm (230 V DC)	lm/W
LN INDV D DALI 1200 34W/3000K	4058075108806	1199x120x40	34	6	3800	700	110
LN INDV D DALI 1200 34W/4000K	4058075108905	1199x120x40	34	6	4200	700	120
LN INDV D DALI 1500 25W/3000K	4058075108929	1488x120x40	25	4.5	3100	480	125
LN INDV D DALI 1500 25W/4000K	4058075108943	1488x120x40	25	4.5	3300	480	125
LN INDV D DALI 1500 48W/3000K	4058075108967	1488x120x40	48	8.5	5300	910	110
LN INDV D DALI 1500 48W/4000K	4058075108981	1488x120x40	48	8.5	5700	910	120
LN INDV D/I DALI 1200 42W/3000K	4058075109001	1199x120x40	42 (34+8)	8.5 (6+2.5)	4650 (3800+850)	815 (700+115)	110
LN INDV D/I DALI 1200 42W/4000K	4058075109025	1199x120x40	42 (34+8)	8.5 (6+2.5)	5050 (4200+850)	815 (700+115)	120
LN INDV D/I DALI 1500 56W/3000K	4058075109049	1488x120x40	56 (48+8)	11 (8.5+2.5)	6150 (5300+850)	1025 (910+115)	110
LN INDV D/I DALI 1500 56W/4000K	4058075109063	1488x120x40	56 (48+8)	11 (8.5+2.5)	6550 (5700+850)	1025 (910+115)	115

	EAN	K	IP	IK	°(°C)	VAC	VDC	Hz	◊	PF	R _a	👤
LN INDV D DALI 1200 34W/3000K	4058075108806	3000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	2.5 kg
LN INDV D DALI 1200 34W/4000K	4058075108905	4000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	2.5 kg
LN INDV D DALI 1500 25W/3000K	4058075108929	3000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	3.0 kg
LN INDV D DALI 1500 25W/4000K	4058075108943	4000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	3.0 kg
LN INDV D DALI 1500 48W/3000K	4058075108967	3000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	3.2 kg
LN INDV D DALI 1500 48W/4000K	4058075108981	4000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70°	> 0.9	> 80	3.2 kg
LN INDV D/I DALI 1200 42W/3000K	4058075109001	3000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70° + 120°	> 0.9	> 80	2.9 kg
LN INDV D/I DALI 1200 42W/4000K	4058075109025	4000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70° + 120°	> 0.9	> 80	2.9 kg
LN INDV D/I DALI 1500 56W/3000K	4058075109049	3000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70° + 120°	> 0.9	> 80	3.5 kg
LN INDV D/I DALI 1500 56W/4000K	4058075109063	4000	20	06	-20...+45	220-240 V	230 V	0/50/60 Hz	70° + 120°	> 0.9	> 80	3.5 kg

LINEAR IndiviLED® DIRECT DALI

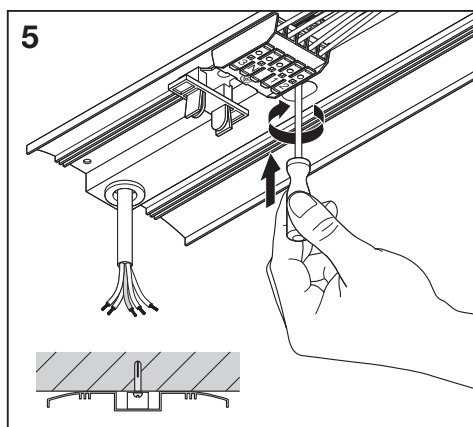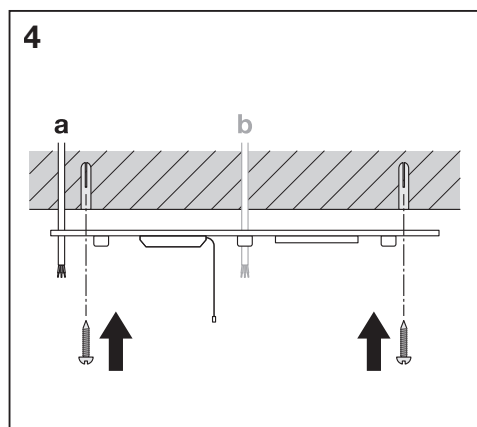
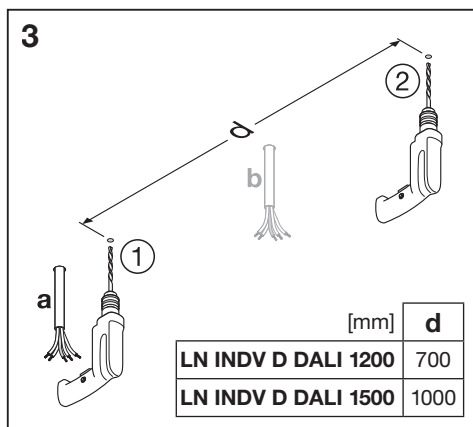
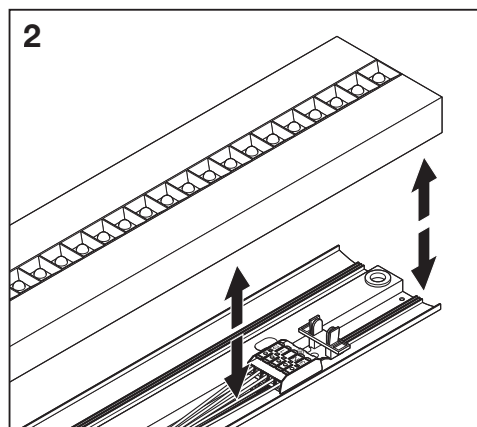
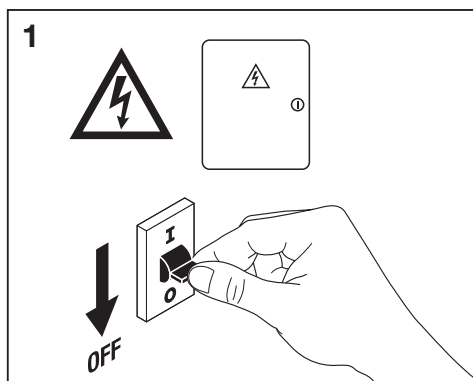
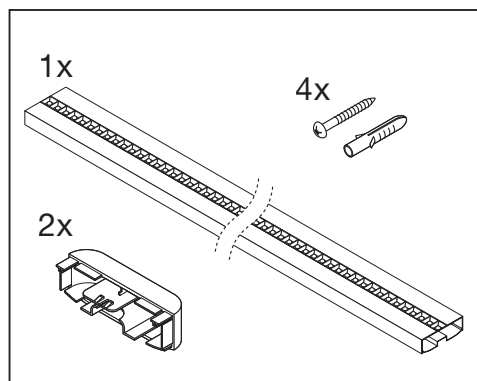




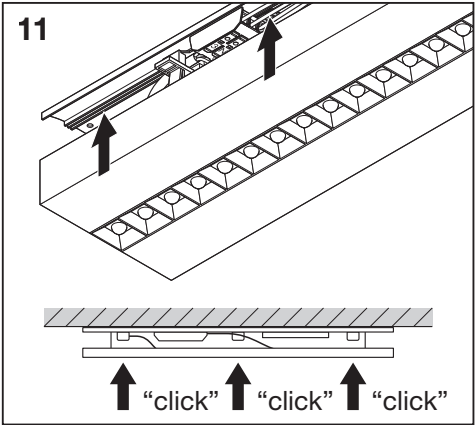
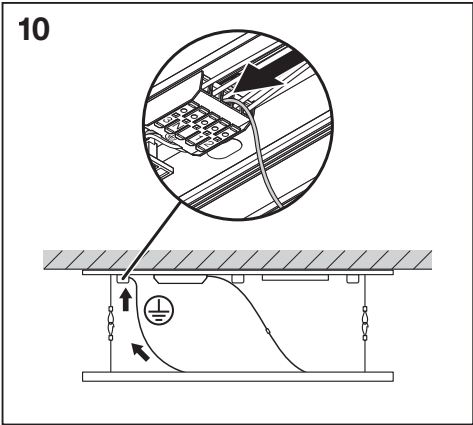
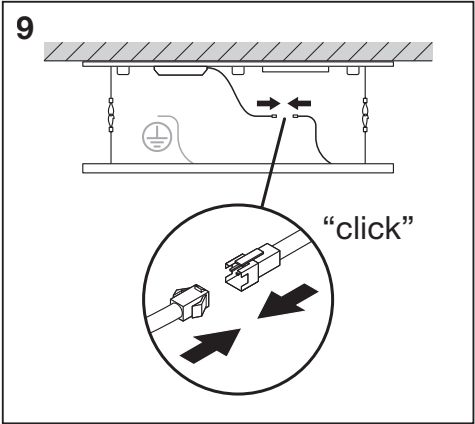
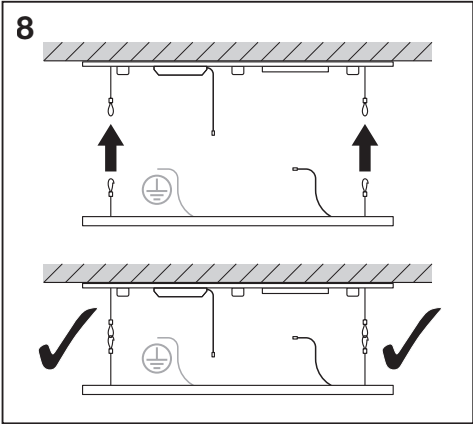
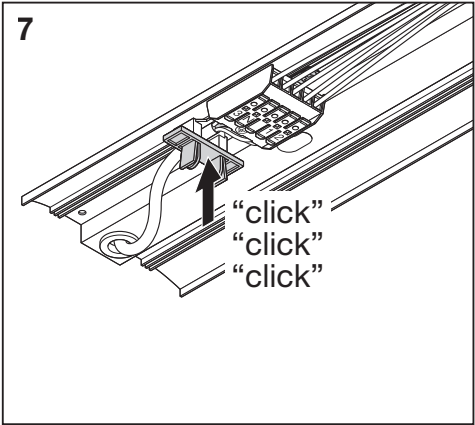
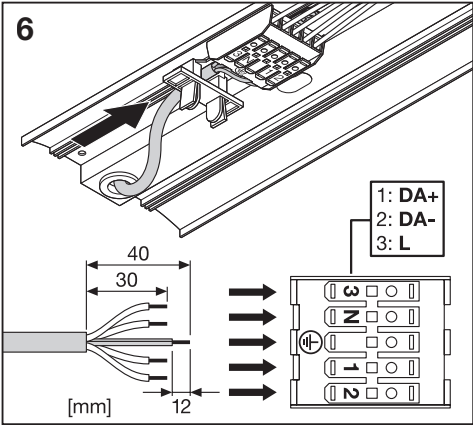




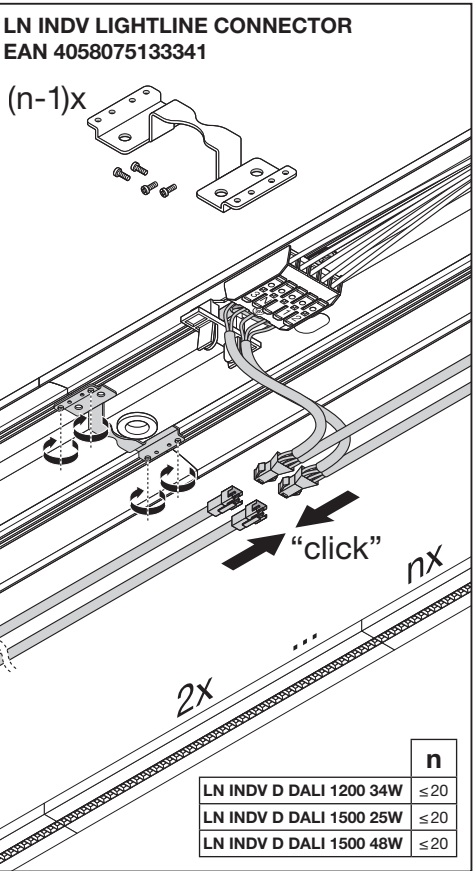
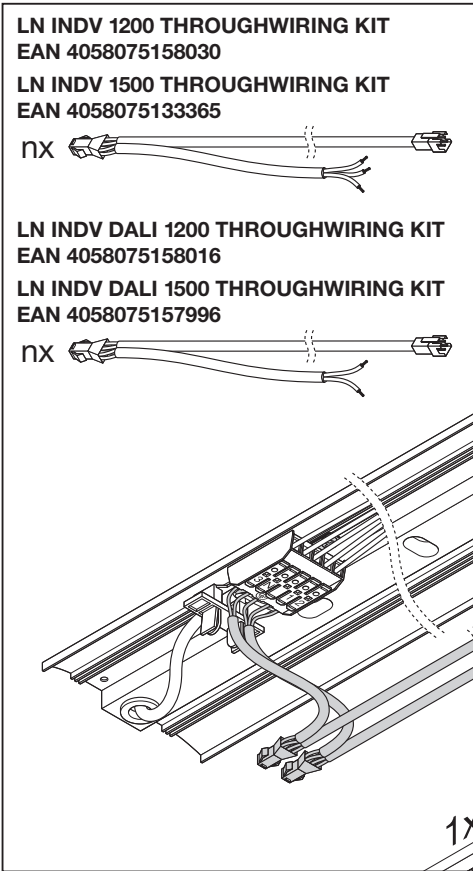
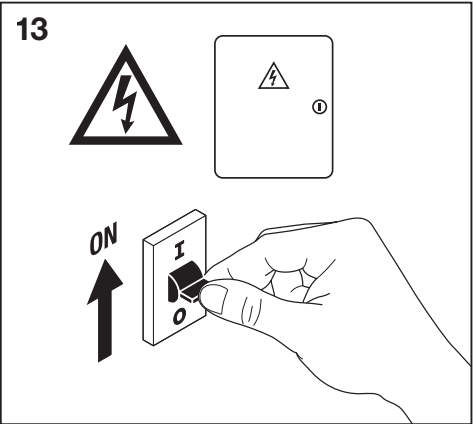
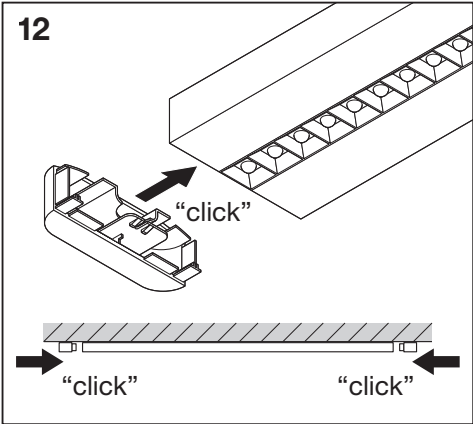




LINEAR IndiviLED® DIRECT | DIRECT/INDIRECT DALI

LN INDV DALI SUSPENSION KIT
EAN 4058075133303

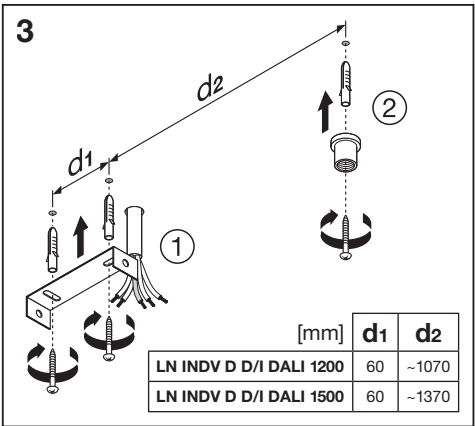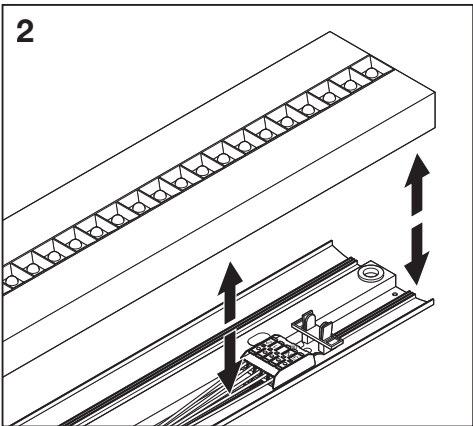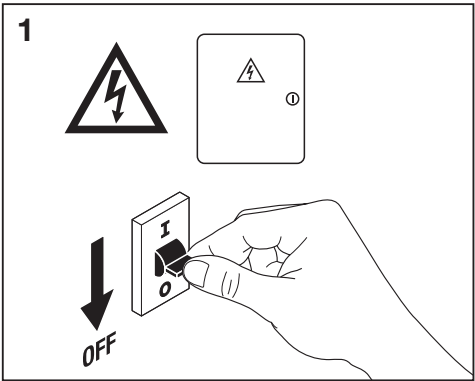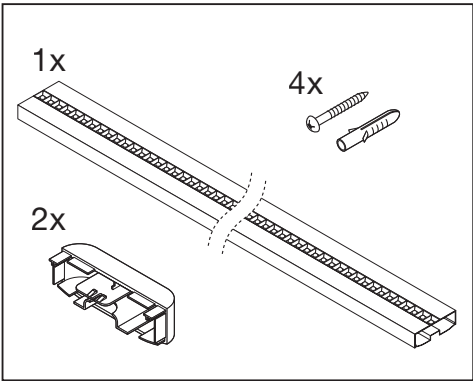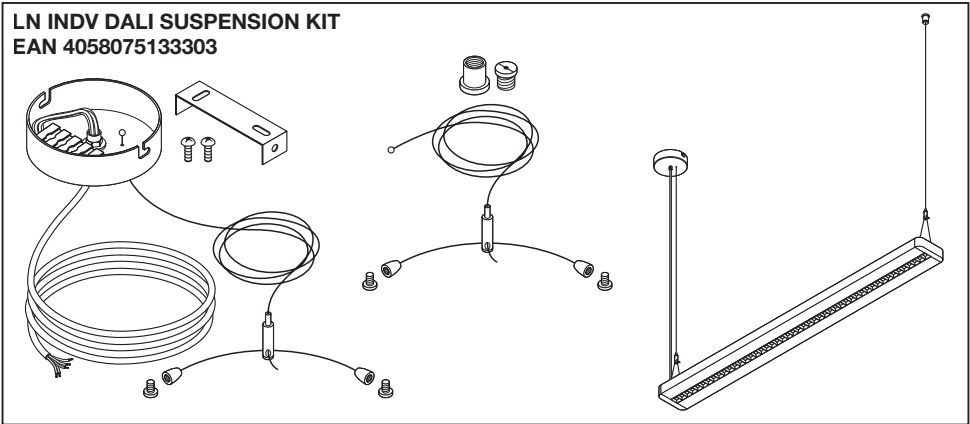

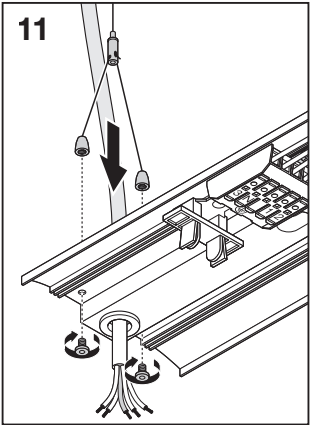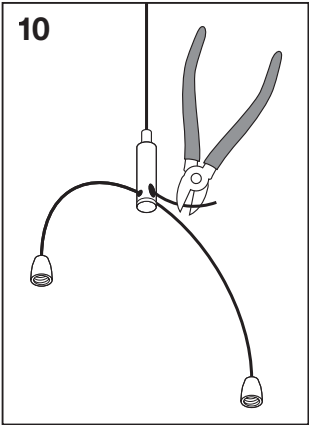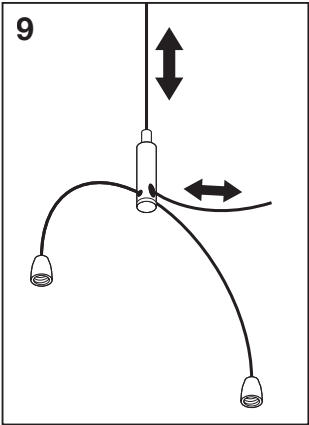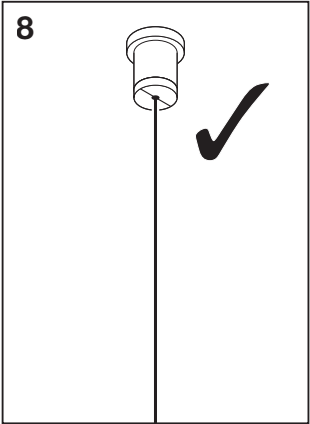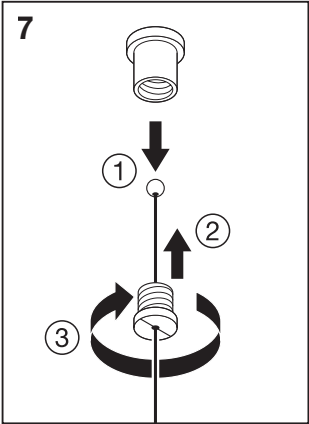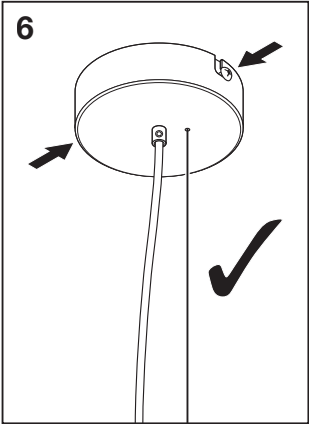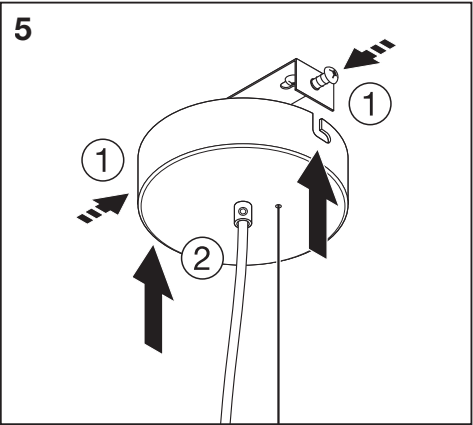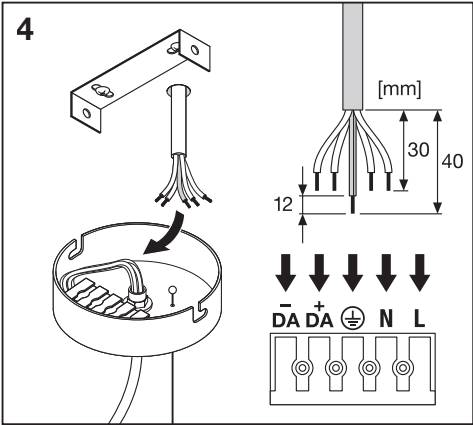

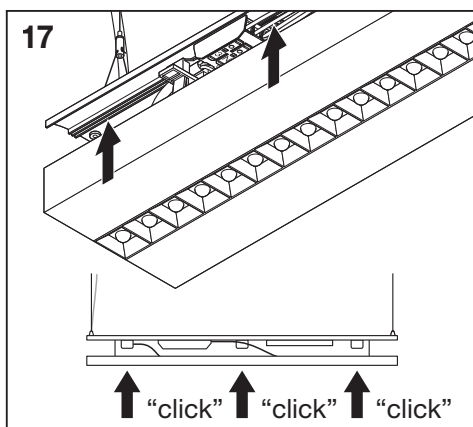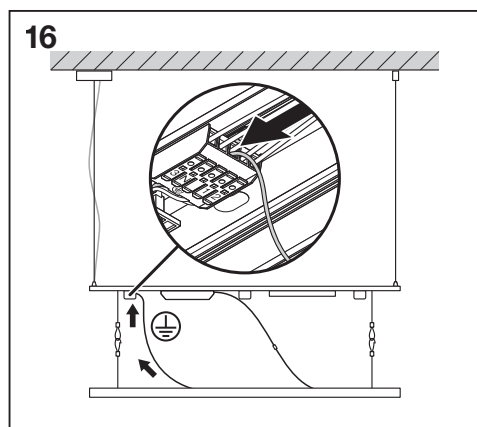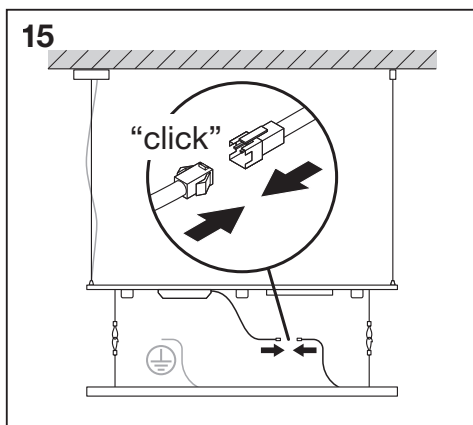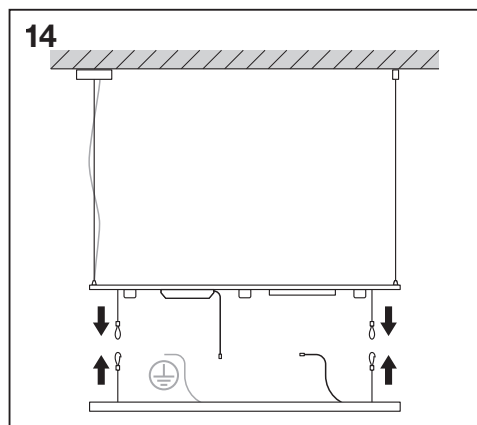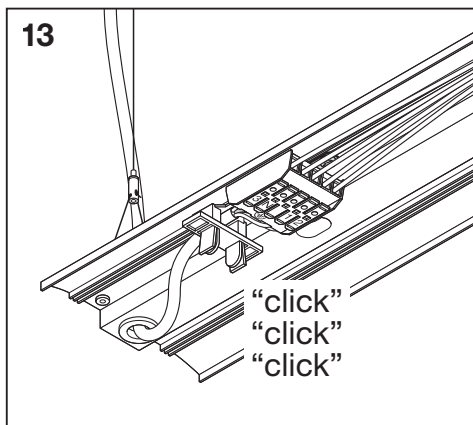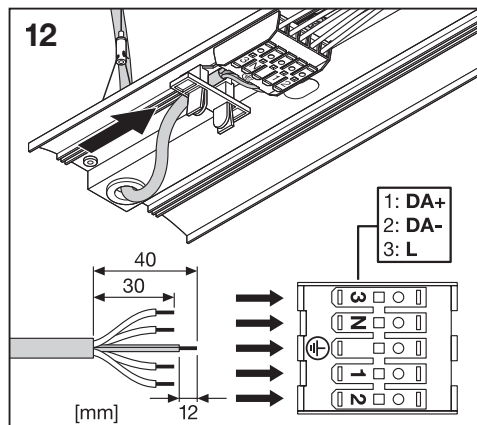

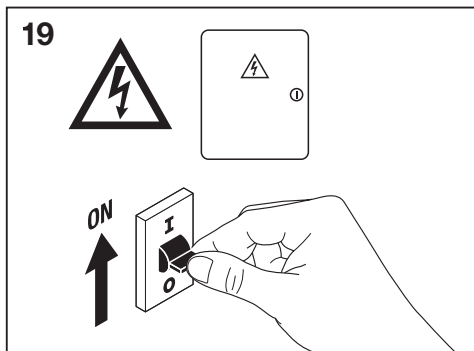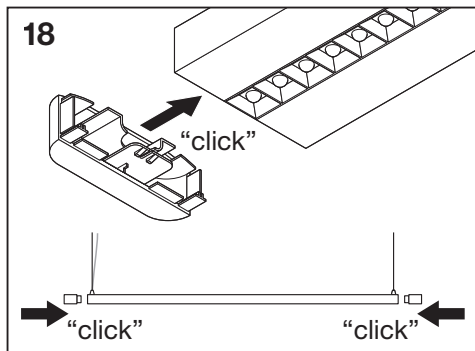

LN INDV 1200 THROUGHWIRING KIT
EAN 4058075158030

LN INDV 1500 THROUGHWIRING KIT
EAN 4058075133365

$n \times$

LN INDV SUSPENSION WIRE
EAN 4058075133327

$n \times$

LN INDV LIGHTLINE CONNECTOR
EAN 4058075133341

$(n-1) \times$

LN INDV DALI 1200 THROUGHWIRING KIT
EAN 4058075158016

LN INDV DALI 1500 THROUGHWIRING KIT
EAN 4058075157996

$n \times$

	[mm]	d	n
LN INDV D DALI 1200 34W	1159	≤ 20	
LN INDV D DALI 1500 25W	1448	≤ 20	
LN INDV D DALI 1500 48W	1448	≤ 20	
LN INDV D/I DALI 1200 42W	1159	≤ 20	
LN INDV D/I DALI 1500 56W	1448	≤ 20	



C10449058
G11041346
04.09.18



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com