


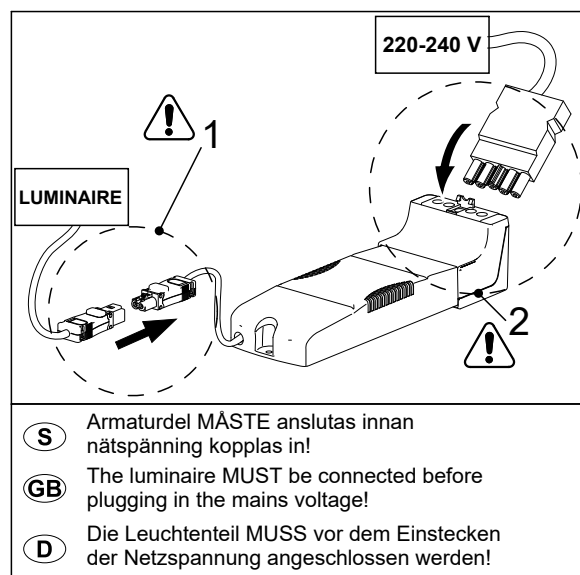
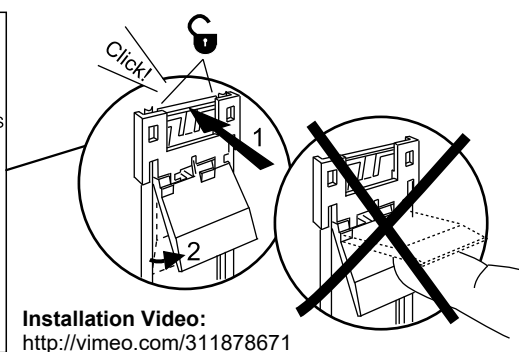
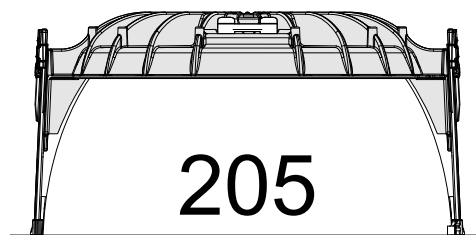
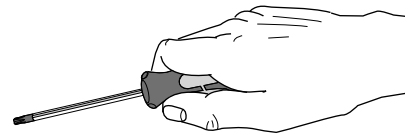


Pleiad G4 Recessed



Removal Procedure

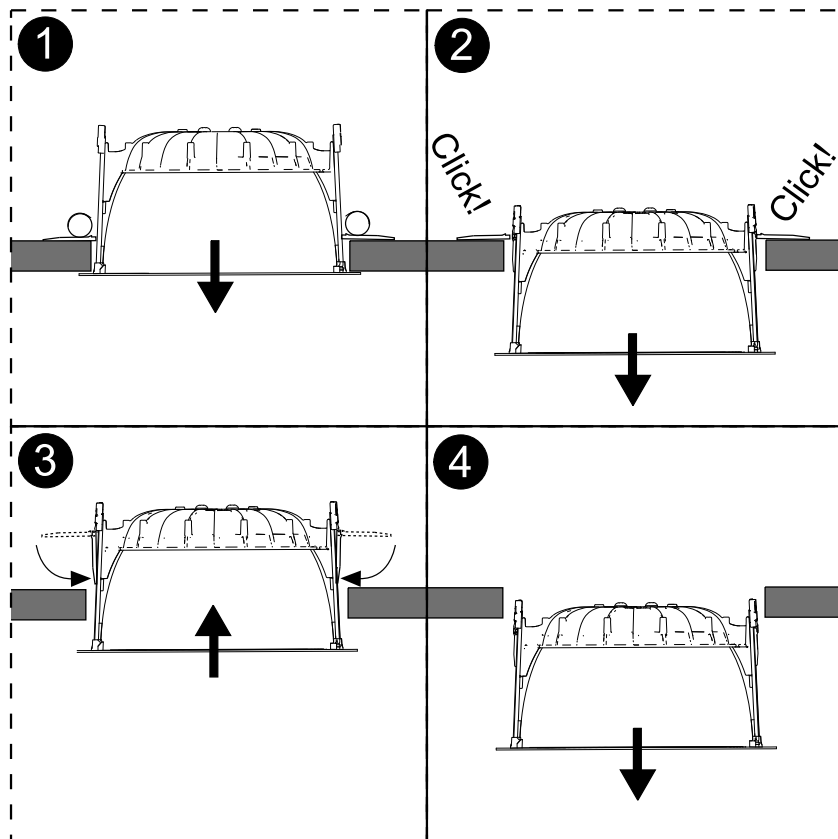

- (S)** För montering i ventilerat alternativt oventilerat utrymme.
- (GB)** For mounting in ventilated or unventilated space

min. 100mm min. 50mm

450 mm 450 mm

Får ej täckas med isolering
Must not be covered with insulating material

Får täckas med isolering enligt tabell nedan
May be covered with insulating material according to table below

Model	Constant Current	Model	Constant Current
125	$\geq 400\text{mA}$	125	$\leq 400\text{mA}$
165	$\geq 500\text{mA}$	165	$\leq 500\text{mA}$

min. 100mm min. 50mm

450 mm 450 mm

Får ej täckas med isolering
Must not be covered with insulating material

50mm

Model 205

- (S)** Om armaturens kabel skulle skadas eller om armaturen inte fungerar som den ska, skall dessa komponenter kontrolleras/bytas av tillverkaren eller av tillverkaren utsedd person
- (GB)** If the luminaire cable is damaged or if the luminaire is not working properly, it shall exclusively be checked/replaced by the manufacturer or by the manufacturer designated person.

- Ljuskällan ska enbart bytas ut av tillverkaren eller hans utsedda person.
- The light source shall only be replaced by the manufacturer or his designated person.