














## Pleiad G4 70





**1** Ø - A mm  
B mm

| Model | A Diameter | B Thickness |
|-------|------------|-------------|
| 70    | Ø 70mm     | 5-50mm      |

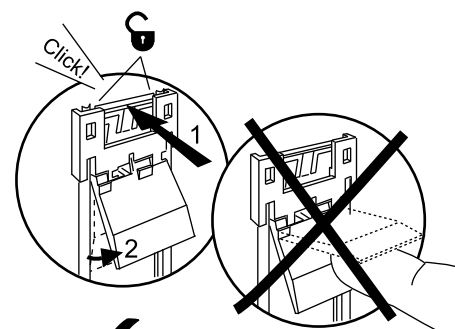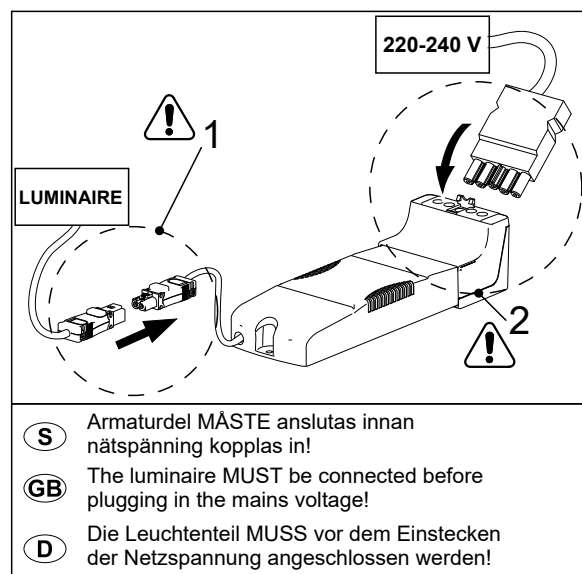

## Pleiad G4 70

### Remove Procedure

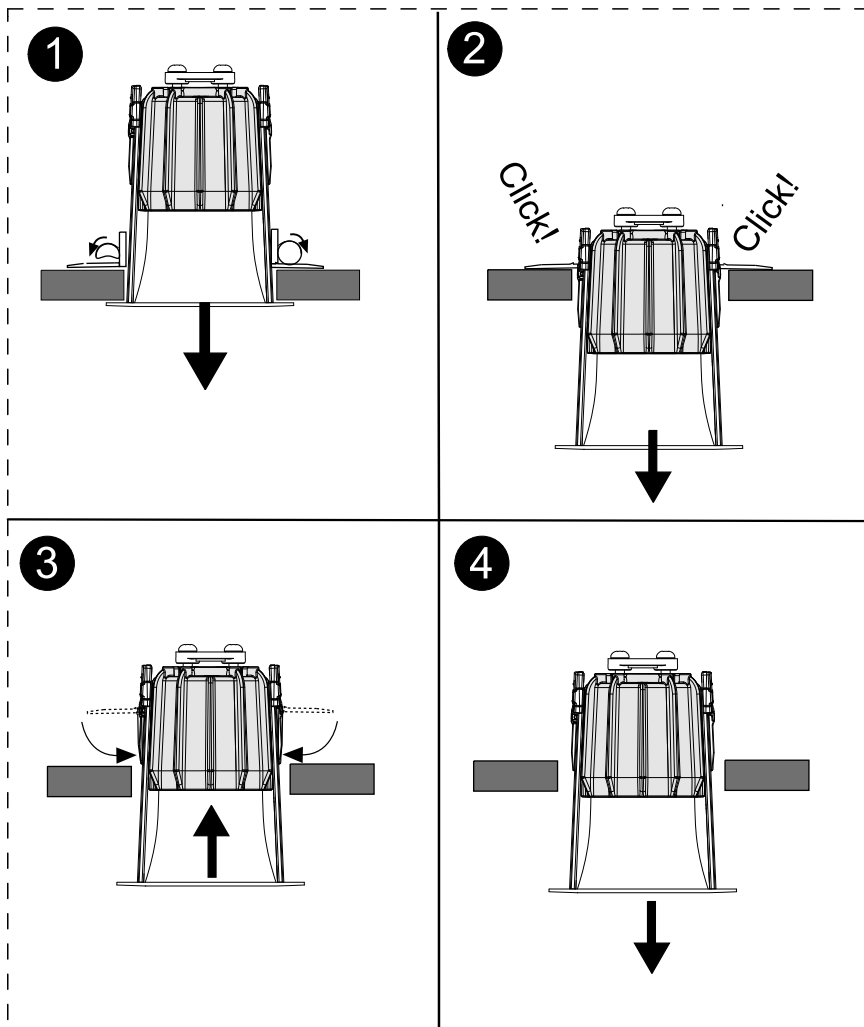

- (S)** För montering i ventilerat alternativt oventilerat utrymme.
- (GB)** For mounting in ventilated or unventilated space

|                                                                                                |                      |                                                                                                                                     |                      |
|------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|                                                                                                |                      |                                                                                                                                     |                      |
| <p>Får ej täckas med isolering<br/>Must not be covered with insulating material</p> <p>0mm</p> |                      | <p>Får täckas med isolering enligt tabell nedan<br/>May be covered with insulating material according to table below</p> <p>0mm</p> |                      |
| Model                                                                                          | Constant Current Max | Model                                                                                                                               | Constant Current Max |
| 70                                                                                             | 300mA                | 70                                                                                                                                  | 250mA                |

Ljuskällan ska enbart bytas ut av tillverkaren eller hans utsedda person.

The light source shall only be replaced by the manufacturer or his designated person.

- (S)** Om armaturens kabel skulle skadas eller om armaturen inte fungerar som den ska, skall dessa komponenter kontrolleras/bytas av tillverkaren eller av tillverkaren utsedd person

- (GB)** If the luminaire cable is damaged or if the luminaire is not working properly, it shall exclusively be checked/replaced by the manufacturer or by the manufacturer designated person.