



Linea AS

SPECIFICATIONS

Beam angle (FWHM)	18° / 37° / 60° (80° on request)
UGR (4H8H 70/50/20)	<19 (18° + 37°)
Fixture material	Die cast aluminium / Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Energy class	A+

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

MADE IN HOLLAND

7 YEAR WARRANTY

ECO

LUXEON STYLIST SERIE

Ask our sales department about the possibilities for:
- Extra LED options from the LUXEON Stylist Series

IP20


CRI80/97 VARIATIONS

Linea AS LV 3000K CRI80 3000LM	page 3
Linea AS LV 4000K CRI80 3400LM	page 3
Linea AS LV 3000K CRI97 2500LM	page 3

CRI80/97 CHOOSE YOUR LV LUMEN OUTPUT


	mA	W	Lumen Output			Lumen / Watt			Driver types			
			CRI80	CRI80	CRI97	CRI80	CRI80	CRI97	CRI80	CRI97	CRI80/97	CRI80/97
			3000K	4000K	3000K	3000K	4000K	3000K	No dim	No dim	Dali	Casambi
Special request	500	17,9	2250	2500	1450	125	139	81	127486	127486	On request	On request
Standard	700	27,0	3000	3400	2150	111	126	80	127486	127486	On request	On request
Special request	800	32,1	3400	3750	2500	106	117	78	127486	127486	On request	On request
Special request	850	33,9	3550	3900	2600	105	115	77	127486	127486	On request	On request

DIMENSIONS

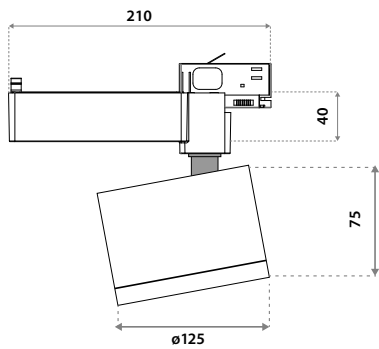

TRACKS

On request! Ask our sales department about the possibilities.



LINEA AS

3000K/4000K

ITEM SPECIFICATIONS (PART A)

Description	18°		37°		60°		mA
	Item code	UGR	Item code	UGR	Item code	UGR	
Linea AS 3000Lm 3000K CRI80	170403XXDA02	14.9	170403XXDB02	16.0	170403XXDC02	20.4	700
Linea AS 3400Lm 4000K CRI80	170403XXDD02	15.4	170403XXDE02	16.4	170403XXDF02	20.8	700
Linea AS 2500Lm 3000K CRI97	170403XXDG02	14.3	170403XXDH02	15.3	170403XXDJ02	19.8	800

ITEM SPECIFICATIONS (PART A)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Linea AS 3000Lm 3000K CRI80	27,0	3000	111	82	0.95	<3%	5A 50µs	50	I	A+
Linea AS 3400Lm 4000K CRI80	27,0	3400	126	82	0.95	<3%	5A 50µs	50	I	A+
Linea AS 2500Lm 3000K CRI97	32,1	2500	78	97	0.95	<3%	5A 50µs	50	I	A+

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
				L70B50	L80B50	L90B50
Linea AS	1355 gr	275x210x130 mm	8 pcs	131.000 hrs	80.000 hrs	35.000 hrs