

RS PRO S30 Q SC

warm white

EAN 4007841 067526

Article number 067526



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



high frequency sensor 360°



Ø 1 - 8 m



2 - 2000 lux



5 sec - 15 min



soft light start



10 - 50% basic brightness



manual override 4h



networkable wireless

Function description

Intelligence is not a question of size. It's a question of inner values. The smartest luminaire in the world, now even better! High-frequency sensor luminaire RS PRO S-series, ideal for office corridors, hallways, toilet facilities, stairwells, including radio networking with other RS PRO S-series, 26 W LED, 2801 lm, PMMA cover, 3000 K, 360° detection, range Ø 1 - 8 m continuously adjustable, basic light function, and neighbourhood group function. The S-series can also be operated with direct current, which enables connection to central battery systems.

Technical specifications

| | |
|---|---|
| Dimensions (L x W x H) | 331 x 331 x 56 mm |
| With lamp | Yes, STEINEL LED system |
| With motion detector | Yes |
| Manufacturer's Warranty | 5 years |
| Settings via | Bluetooth |
| With remote control | No |
| Version | warm white |
| PU1, EAN | 4007841067526 |
| Application, place | Indoors |
| Application, room | corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, outdoors, Indoors |
| Colour | Silver |
| includes sheet of self-adhesive numbers | No |
| Installation site | wall, ceiling |
| Installation | Wall, Ceiling, Surface wiring |

| | |
|-----------------------------|--|
| Transmitter power | < 1 mW |
| Luminous flux total product | 2801 lm |
| Total product efficiency | 108 lm/W |
| Colour temperature | 3000 K |
| Colour variation LED | SDCM3 |
| Lamp | LED cannot be replaced |
| Base | without |
| LED cooling system | Passive Thermo Control |
| Soft light start | Yes |
| Continuous light | selectable |
| Functions | Group parameterisation, Manual ON / ON-OFF, Neighbouring group function, Presence function, Motions sensor, Connection to central battery systems, DIM function, Adjustable fade time when switching on and off, Light sensor, Normal / test mode, Orientation light, Presence detector logic, Encrypted communication |

RS PRO S30 Q SC

warm white

EAN 4007841 067526

Article number 067526



Technical specifications

| | |
|---|---|
| Impact resistance | IK03 |
| IP-rating | IP20 |
| Protection class | II |
| Ambient temperature | -20 – 40 °C |
| Housing material | Aluminium |
| Cover material | Plastic, opal |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Power consumption | 0,39 W |
| Mounting height max. | 4,00 m |
| Slave mode selectable | Yes |
| Detection | also through glass, wood and stud walls |
| Angle of aperture | 160 ° |
| Capability of masking out individual segments | Yes |
| Electronic scalability | Yes |
| Mechanical scalability | No |
| Reach, radial | Ø 10 m (79 m ²) |
| Reach, tangential | Ø 10 m (79 m ²) |
| Photo-cell controller | Yes |

| | |
|--|------------------|
| Twilight setting | 2 – 2000 lx |
| Time setting | 5 s – 60 Min. |
| Basic light level function | Yes |
| Basic light level function, detail | LED effect light |
| Basic light level function time | 1-60 min |
| Main light adjustable | Yes |
| Twilight setting TEACH | Yes |
| Interconnection | Yes |
| Type of interconnection | Master/master |
| Interconnection via | Bluetooth |
| Lebensdauer LED nach IEC-62717 (L70) | 100.000 h |
| Lebensdauer LED nach IEC-62717 (L80) | 74.000 h |
| Lebensdauer LED nach IES TM-21 (L70) | >60.000 h |
| Lebensdauer LED nach IES TM-21 (L80) | >60.000 h |
| Absicherung B10 (ST) | 36 |
| Absicherung B16 (ST) | 58 |
| Absicherung C10 (ST) | 61 |
| Absicherung C16 (ST) | 97 |
| Basic light level function in per cent | 7 – 100 % |
| Output | 26 W |
| Colour Rendering Index CRI | = 82 |

RS PRO S30 Q SC


warm white

EAN 4007841 067526

Article number 067526




Detection Zone

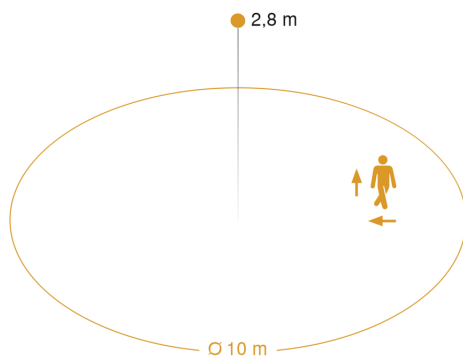


Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

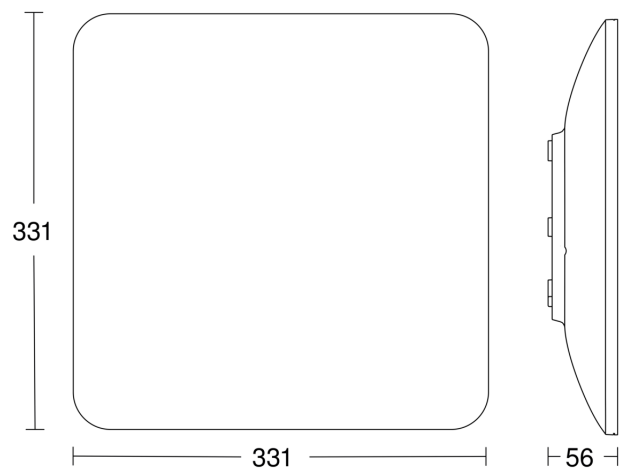

Slave/wireless master interconnection circuit diagram



Master/master interconnection circuit diagram

