


RS PRO S30 Q SC

Neutral white
 EAN 4007841 067519
 Article number 067519

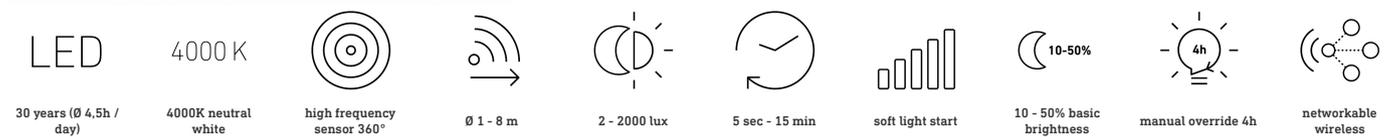

Function description

Intelligence is not a question of size. It's a question of inner values. The smartest luminaire in the world, now even better! High-frequency sensor luminaire RS PRO S-series, ideal for office corridors, hallways, toilet facilities, stairwells, including radio networking with other RS PRO S-series, 26 W LED, 2987 lm, PMMA cover, 4000 K, 360° detection, range Ø 1 - 8 m continuously adjustable, basic light function, and neighbourhood group function. The S-series can also be operated with direct current, which enables connection to central battery systems.

Technical specifications

Dimensions (L x W x H)	331 x 331 x 56 mm	Luminous flux total product	2987 lm
With lamp	Yes, STEINEL LED system	Total product efficiency	115 lm/W
With motion detector	Yes	Colour temperature	4000 K
Manufacturer's Warranty	5 years	Colour variation LED	SDCM3
Settings via	Bluetooth	Lamp	LED cannot be replaced
With remote control	No	Base	without
Version	Neutral white	LED cooling system	Passive Thermo Control
PU1, EAN	4007841067519	Soft light start	Yes
Application, place	Indoors	Continuous light	selectable
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, outdoors, Indoors	Functions	Group parameterisation, Manual ON / ON-OFF, Neighbouring group function, Presence function, Motions sensor, Connection to central battery systems, DIM function, Adjustable fade time when switching on and off, Light sensor, Normal / test mode, Orientation light, Presence detector logic, Encrypted communication, Master/slave override, Data monitoring
Colour	Silver		
includes sheet of self-adhesive numbers	No		
Installation site	wall, ceiling		
Installation	Wall, Ceiling, Surface wiring		

RS PRO S30 Q SC

Neutral white
 EAN 4007841 067519
 Article number 067519



Technical specifications

Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,39 W
Mounting height max.	4,00 m
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Angle of aperture	160 °
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 10 m (79 m ²)
Reach, tangential	Ø 10 m (79 m ²)
Photo-cell controller	Yes
Transmitter power	< 1 mW


Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Basic light level function time	1-60 min
Main light adjustable	Yes
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Bluetooth
Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Lebensdauer LED nach IEC-62717 (L80)	74.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
Absicherung B10 (ST)	36
Absicherung B16 (ST)	58
Absicherung C10 (ST)	61
Absicherung C16 (ST)	97
Basic light level function in per cent	7 – 100 %
Output	26 W
Colour Rendering Index CRI	= 82
Starting current, maximum	16,5 A

RS PRO S30 Q SC

Neutral white
EAN 4007841 067519
Article number 067519




Detection Zone

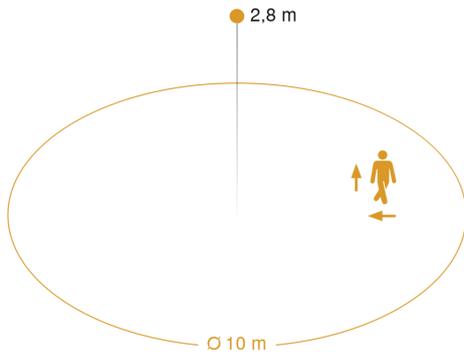


Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

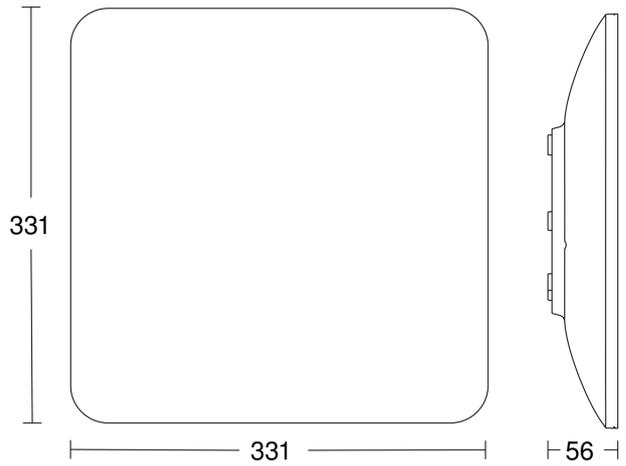

Slave/wireless master interconnection circuit diagram



Master/master interconnection circuit diagram

