


PHILIPS

Ledinaire Recessed


RC060B



**W60L60
W62L62**

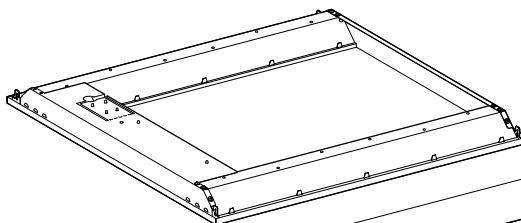

W30L120

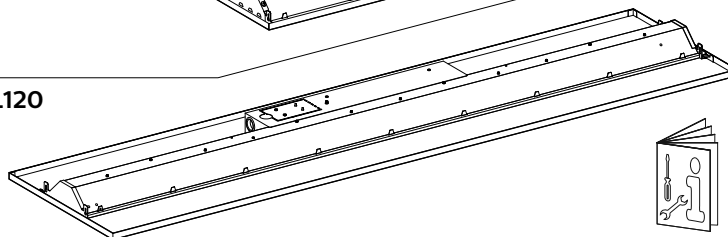

**50Hz
60Hz**

**220V
240V**

**LIFE
L70B50
30K hrs**

IP20

IK03





**GLOW
WIRE
650 °C**





				Dimensions in mm			
	System lumen	CCT	Driver	P(W)	A	B	
RC060B LED32S/840 PSU W60L60	3200lm	4000K	PSU	36	597	597	2.76
RC060B LED32S/830 PSU W60L60		3000K			622	622	579
RC062B LED32S/840 PSU W62L62		4000K					
RC060B LED32S/840 PSU W30L120		4000K			297	1197	2.50
RC060B LED32S/830 PSU W30L120		3000K					


**W60L60
W62L62**

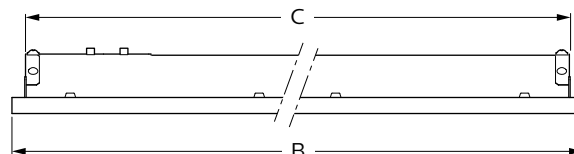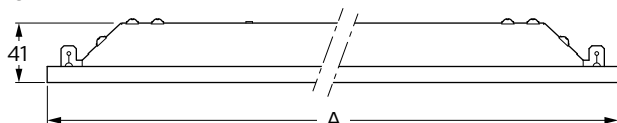

W30L120

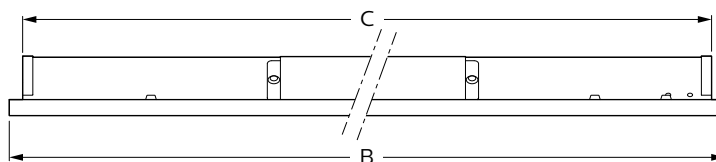


Inrush current


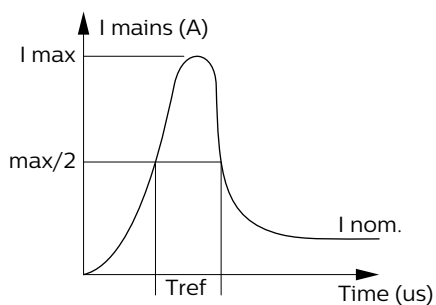


	LED34S
	Electrical characteristics
Inom(mA)	240
I max.(A)	5,3
Tref(μs)	70
MCB	Luminaires Max.
B-10A	15
B-16A	24
C-10A	24
C-16A	40



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- LED board & led driver are not serviceable and replaceable.



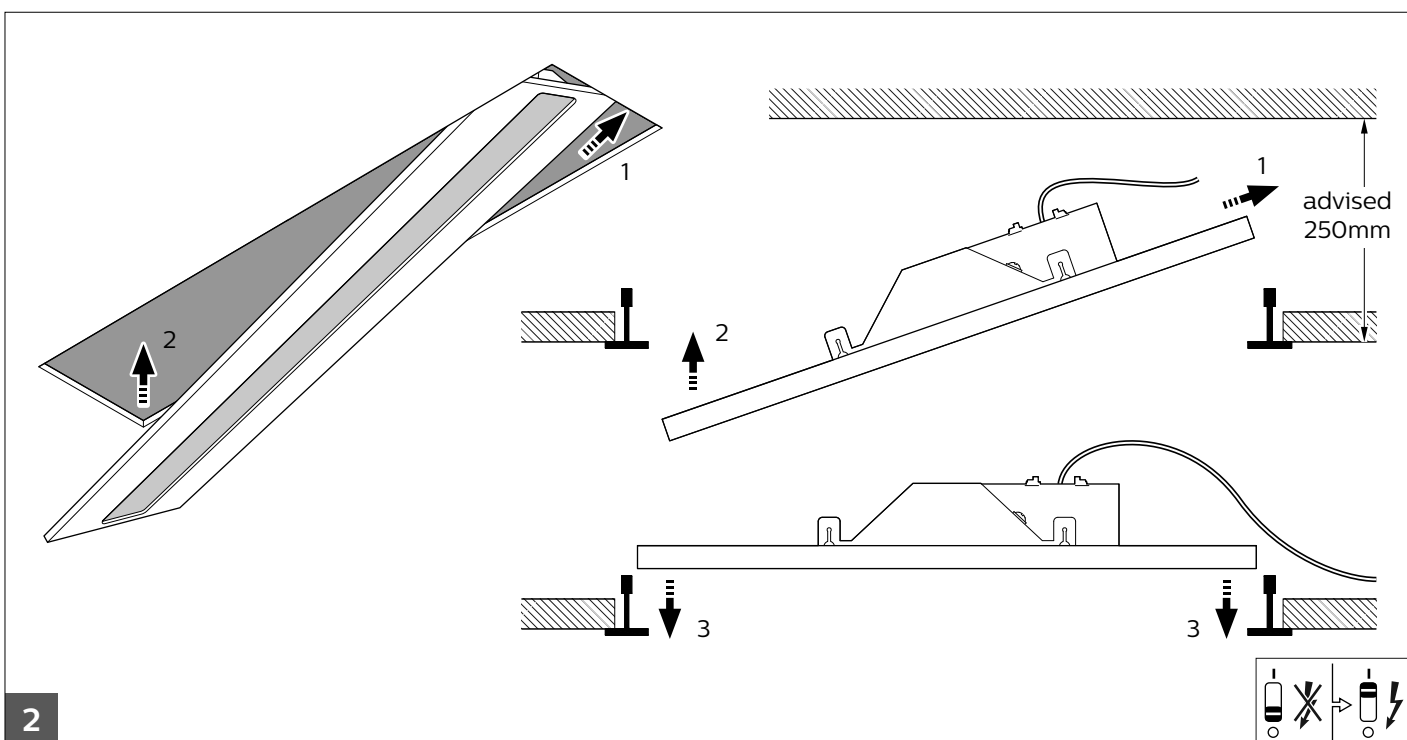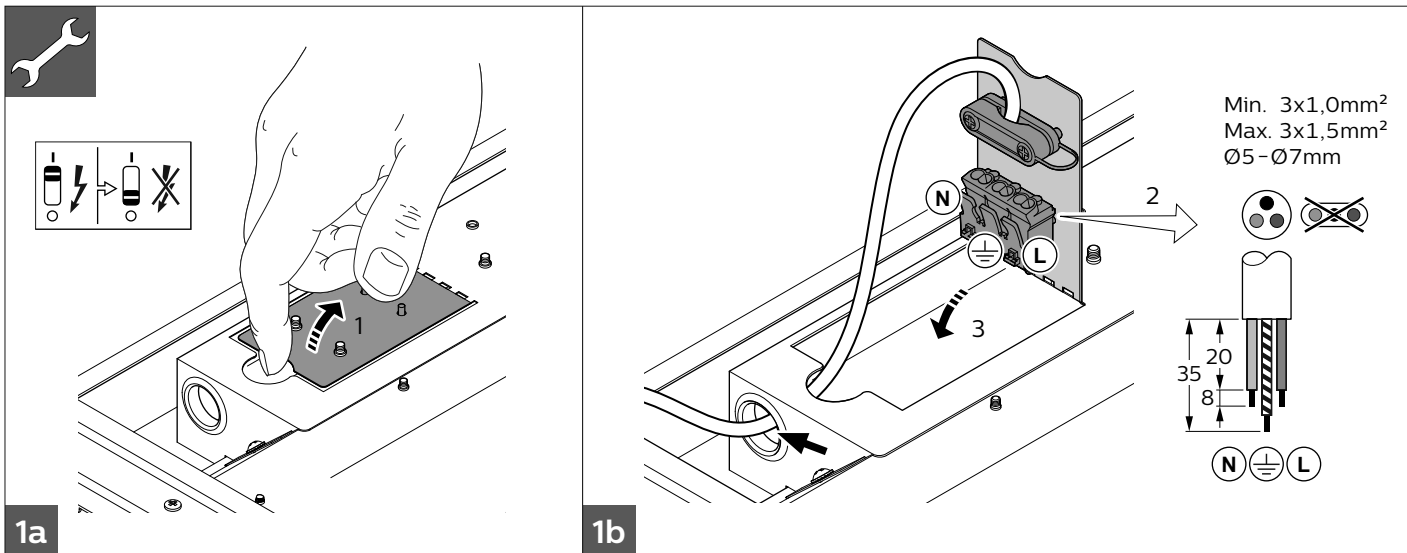

add safety cable if required

