




PHILIPS

Cleanroom LED
CR250B


Recessed/Surface
mounted



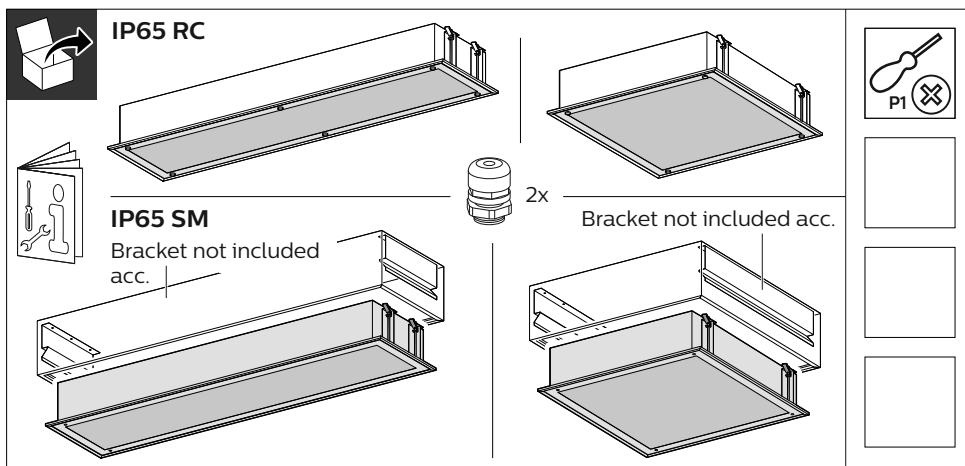




Configuration types	application	Size type	Lumen (lm)	Driver	A	B	C	kg
CR250B	RC (Luminaire only)	VPC/CPC/PCV	W60L60	PSU/PSD	595	595	-	9.0
			W30L120		1195	295	-	10.0
	SM (Luminaire+bracket)	Ceiling only	W60L60		630	630	180	13.5
			W30L120		1230	330	185	15.0

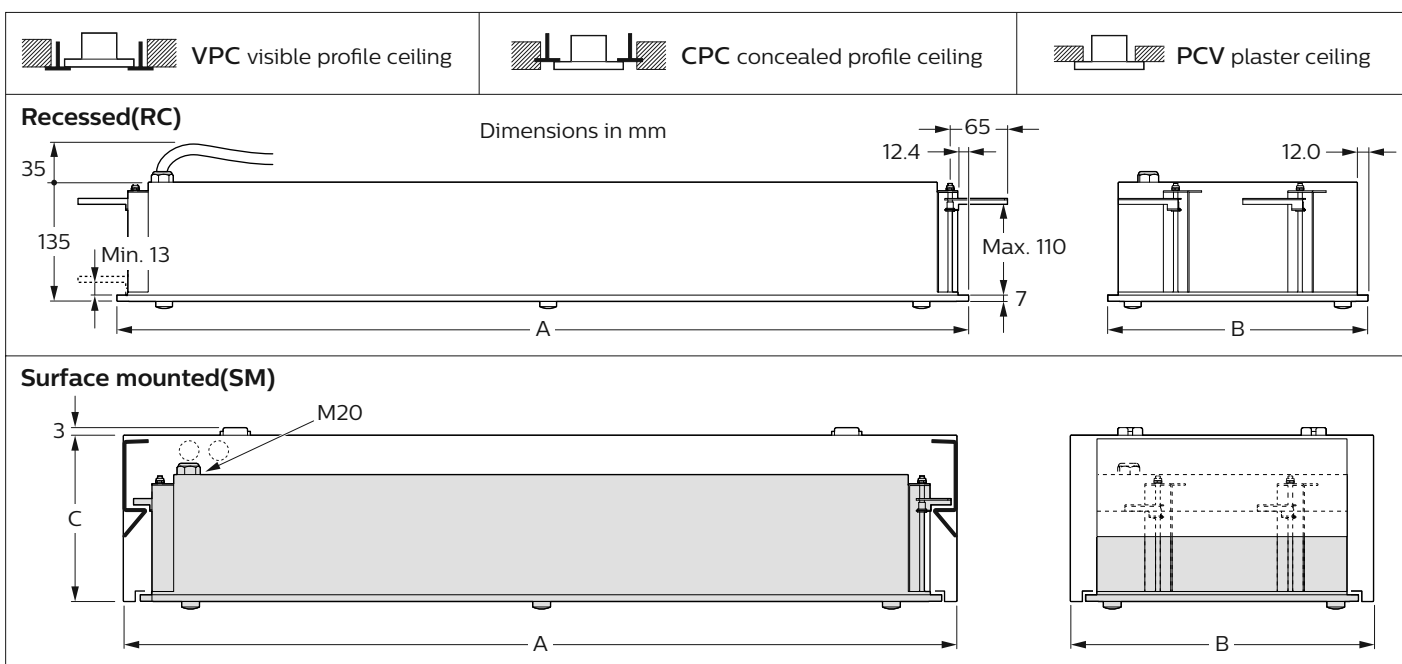



Inrush current	PSU		PSD	
	36W	75W	36W	75W
I _{max} (A)	13	21	4.8	4.6
T _{ref} (μs)	270	220	750	900
MCB	Luminaire Max.			
B-10 A	15	15	15	15
B-16 A	24	24	24	24
B-24 A	37	37	37	37
C-10 A	25	25	25	25
C-16 A	40	40	40	40
C-24 A	62	62	62	62

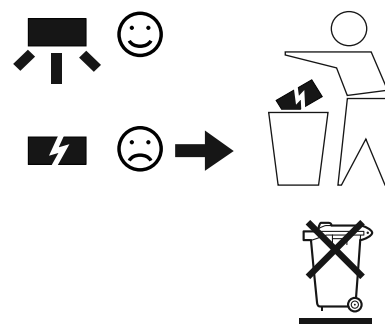

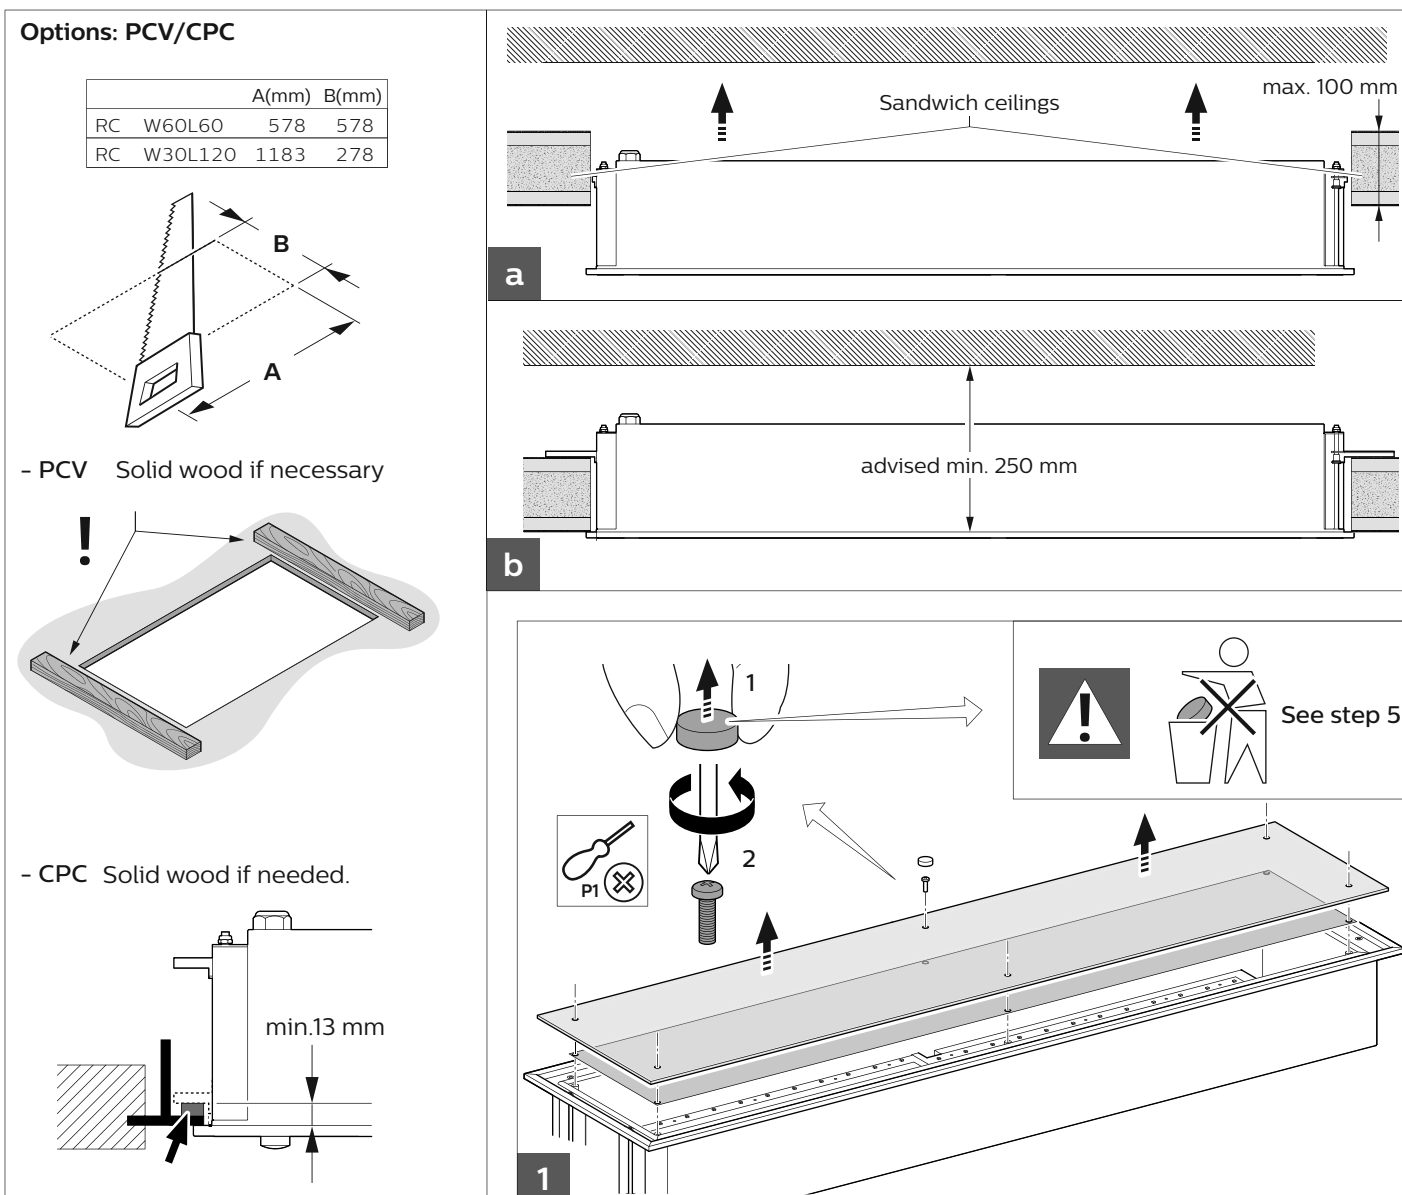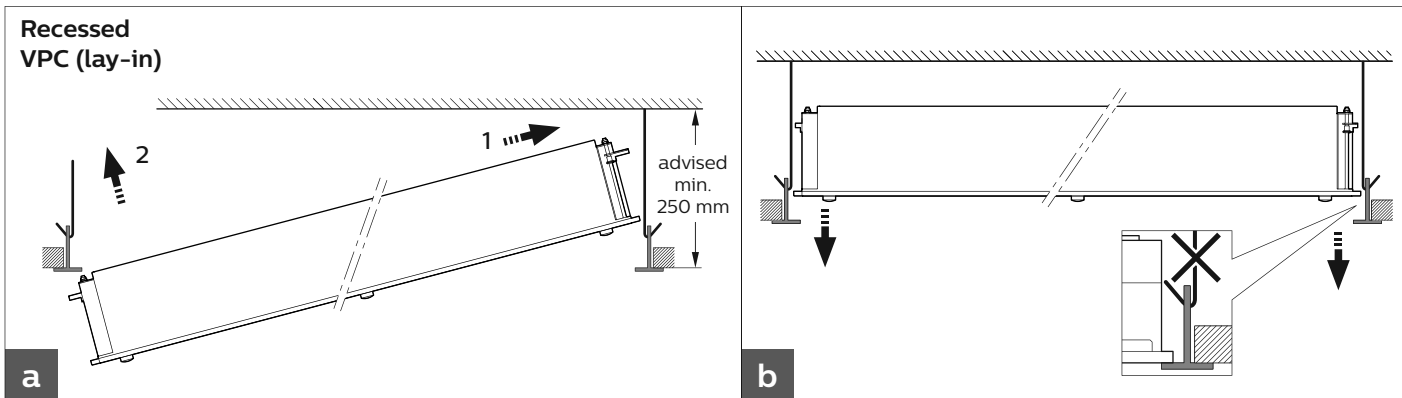
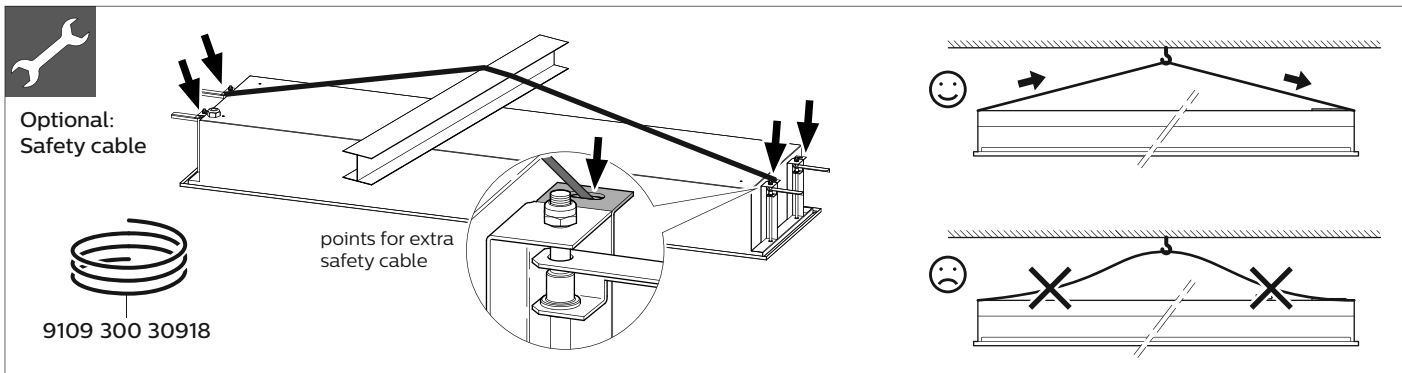


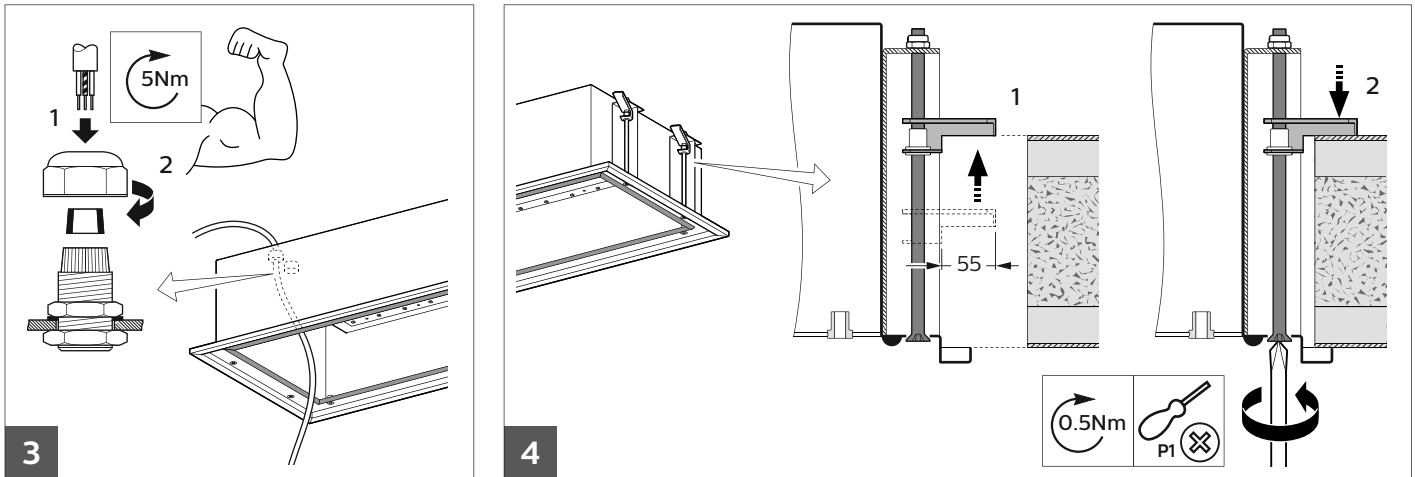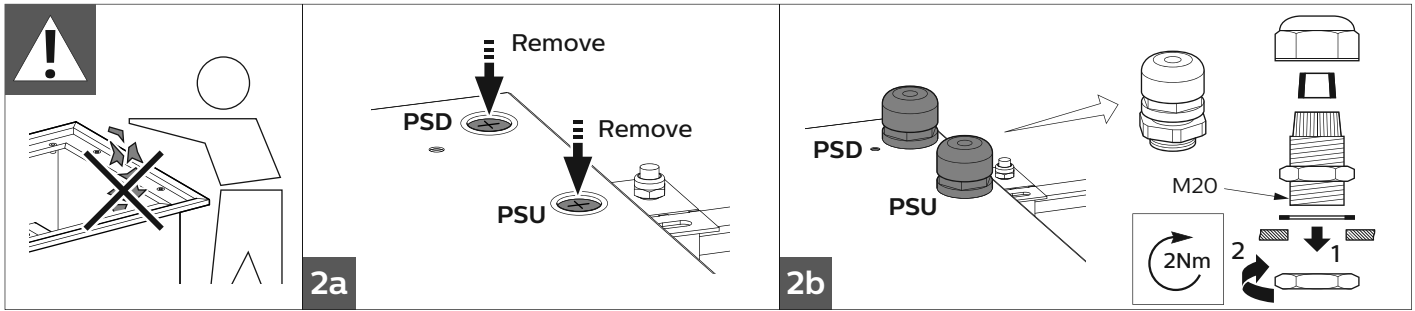

General electrical connections

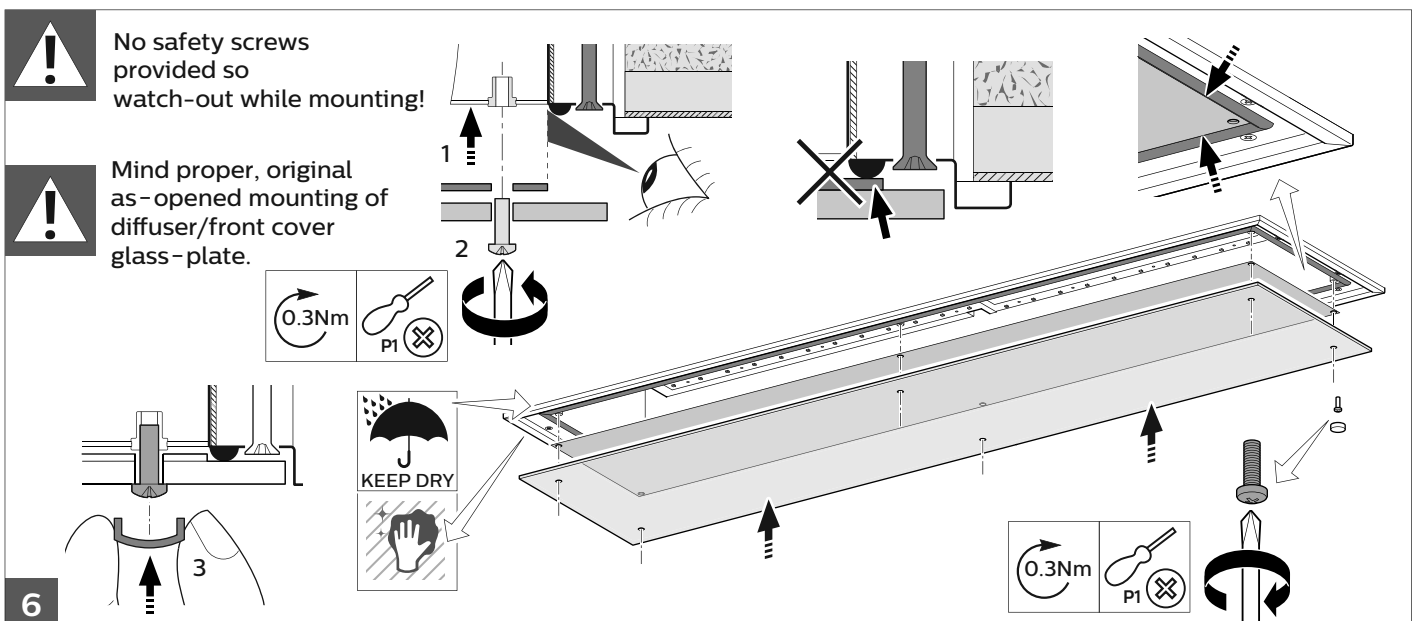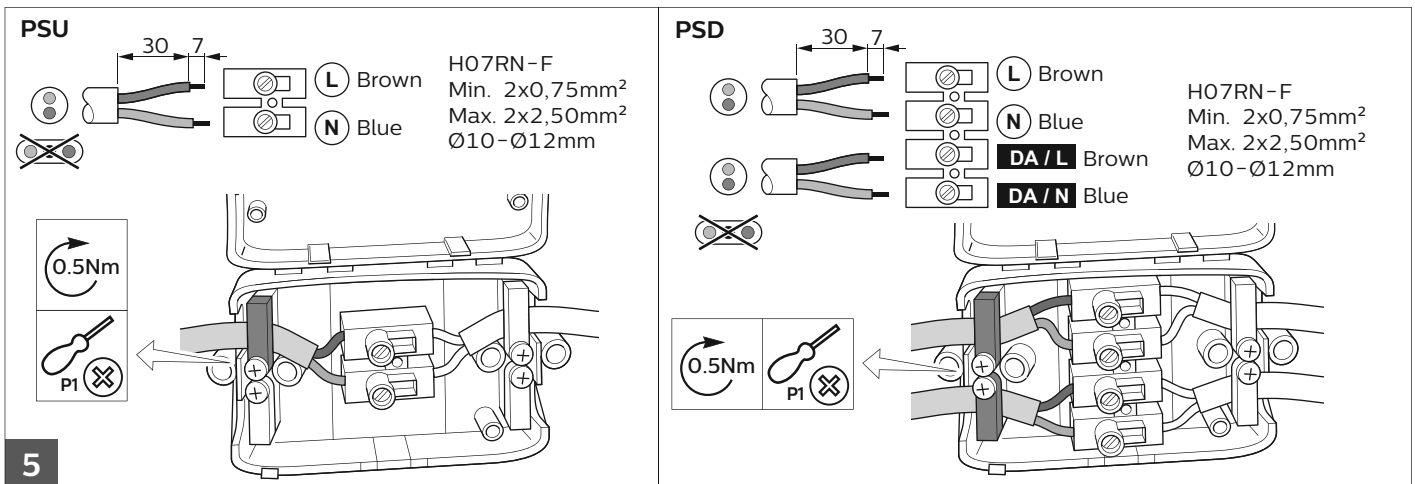

Option: Surface mounted(S.M.)

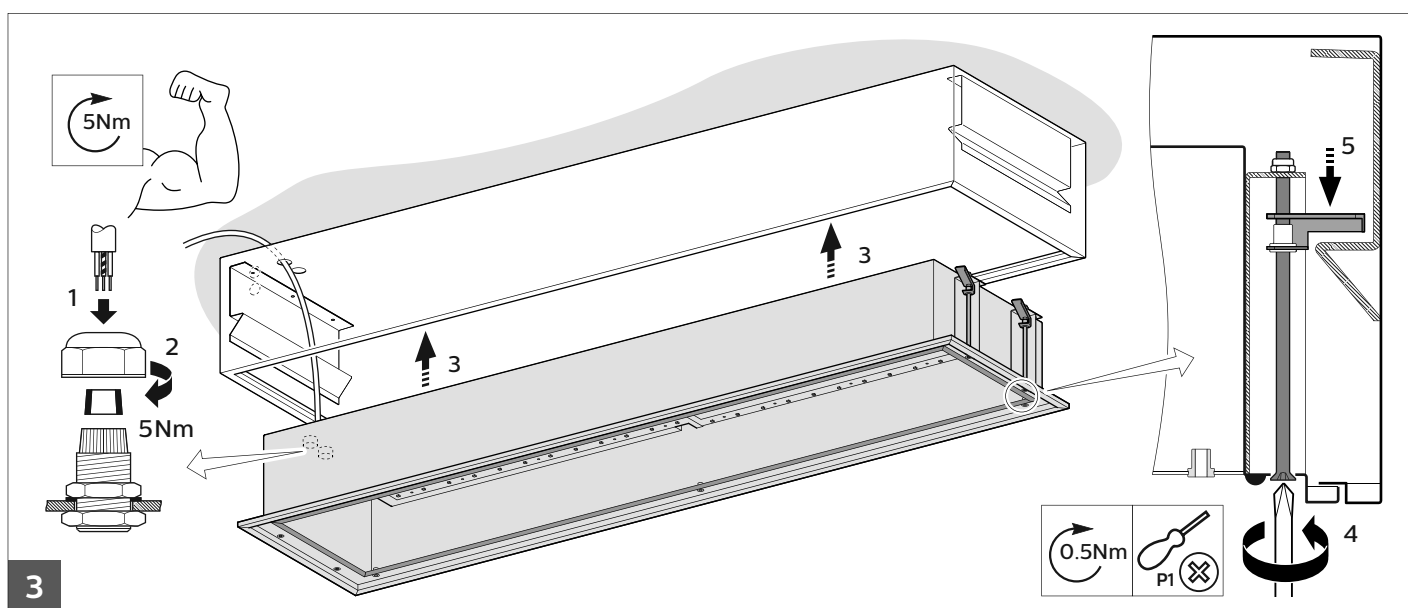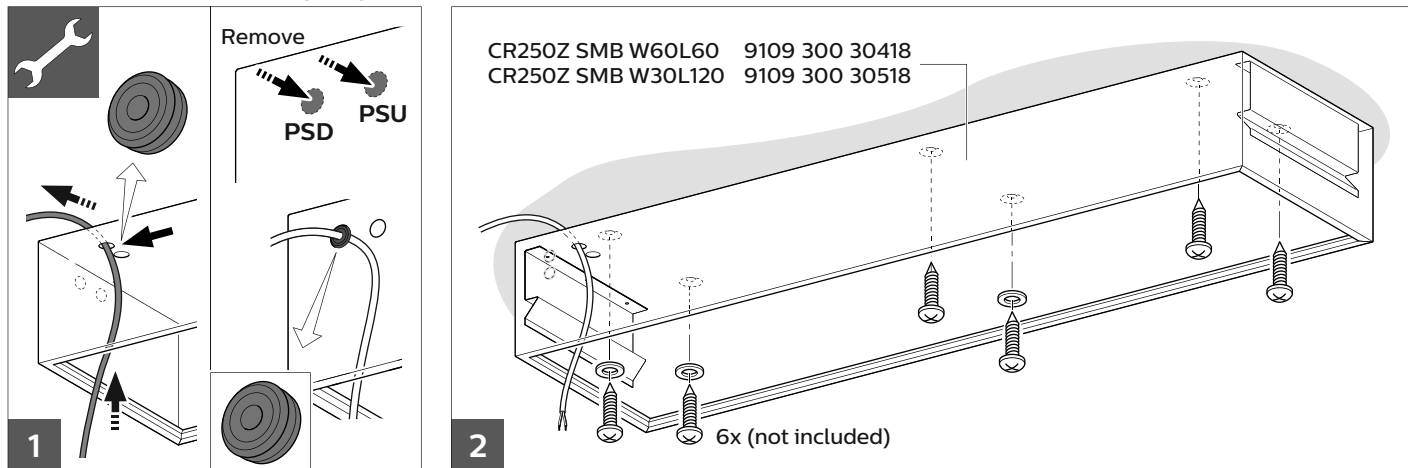

4 General electrical connections. See step 5 (page 3/4)

