

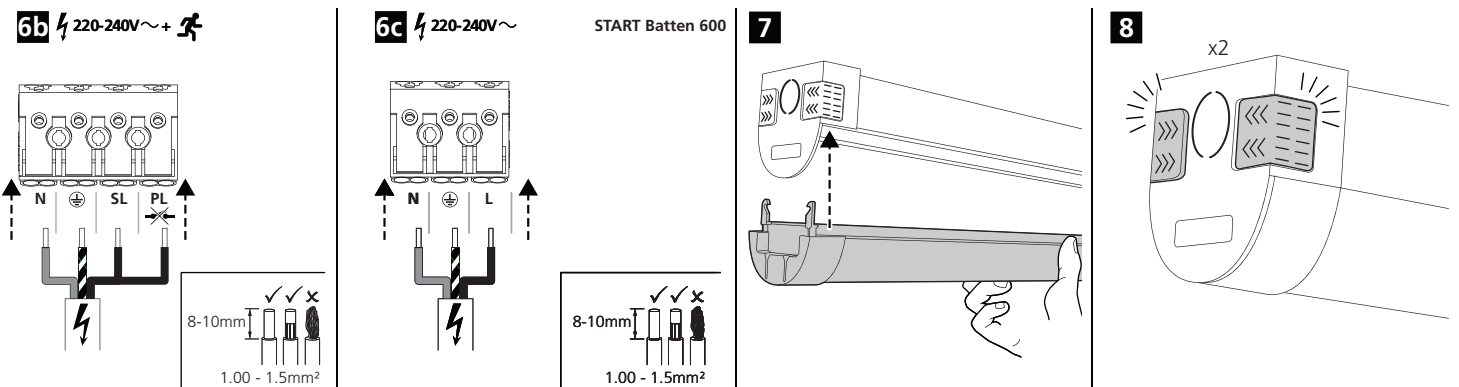
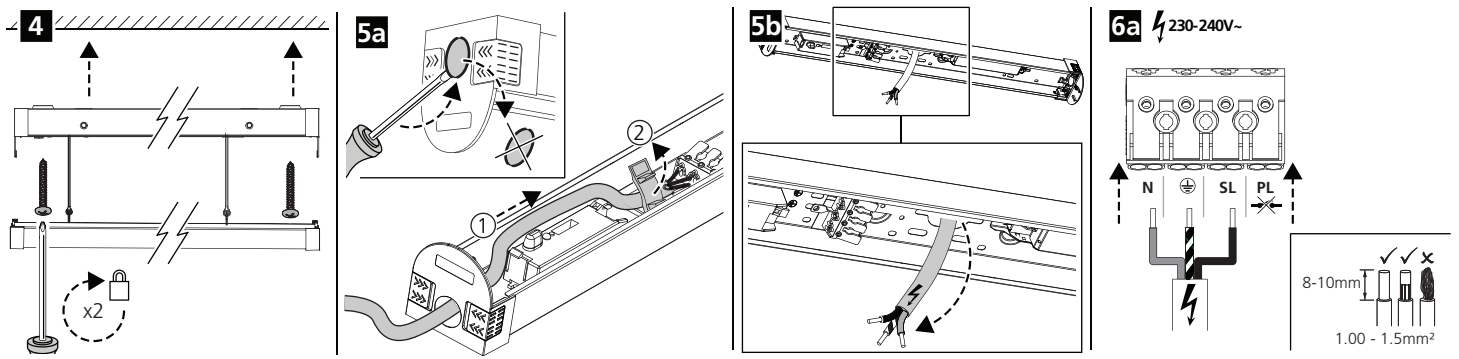
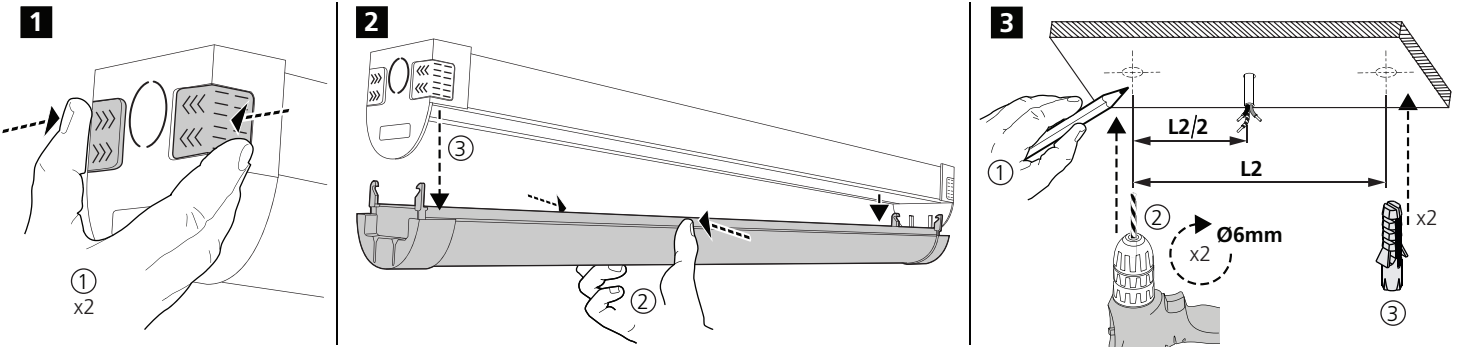
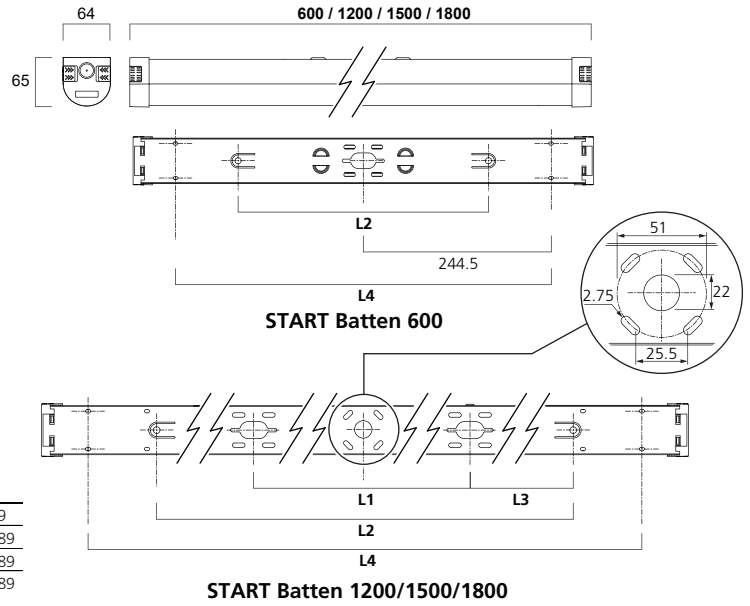
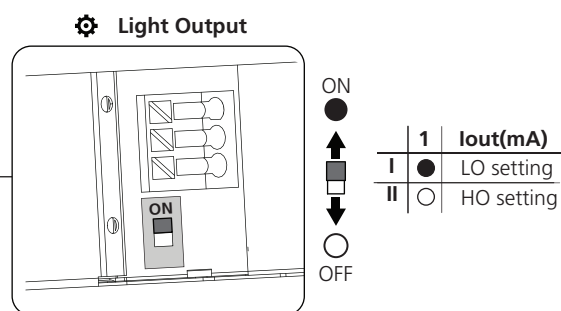









	L1	L2	L3	L4
START Batten 600	-	326	-	489
START Batten 1200	600	926	163	1089
START Batten 1500	600	943	163	1089
START Batten 1800	600	943	163	1089

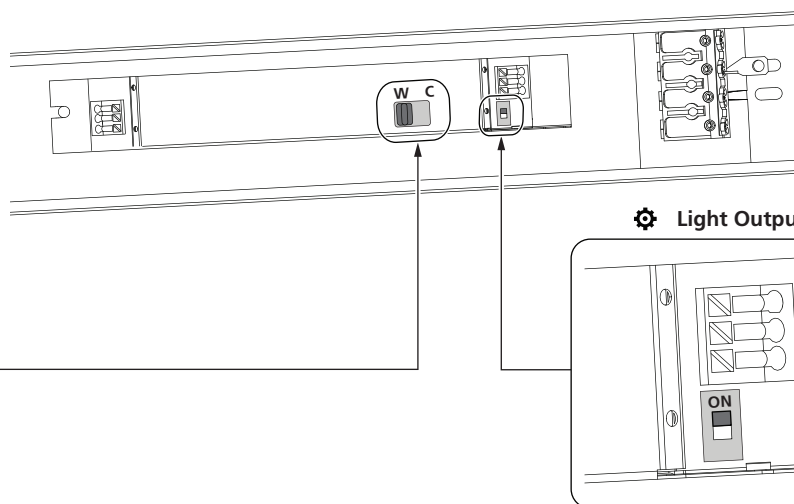

! CCT / Light Output





1 Start Batten ON/OFF MW Sensor KIT 0048986

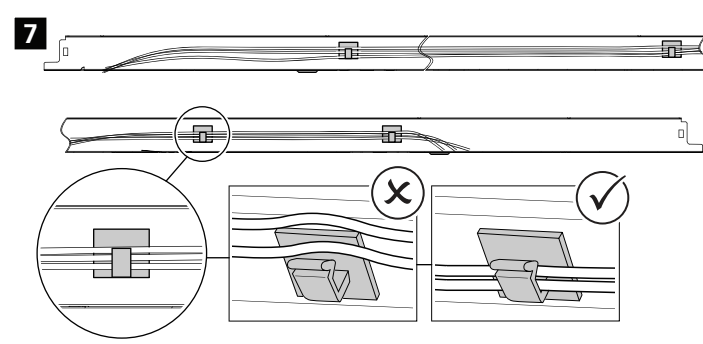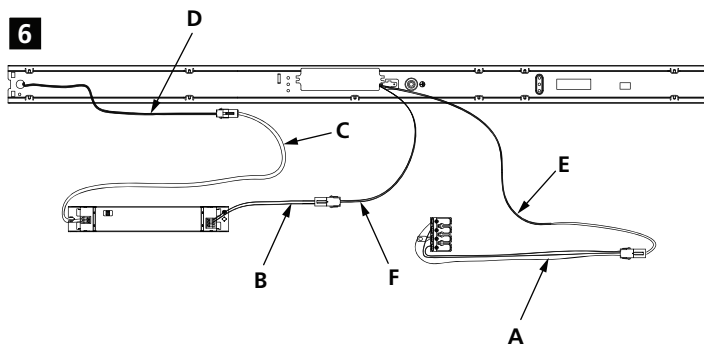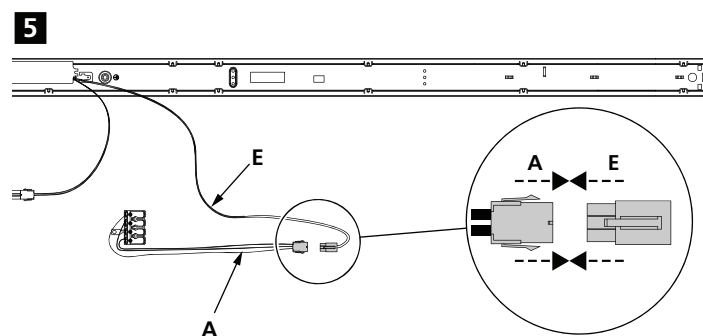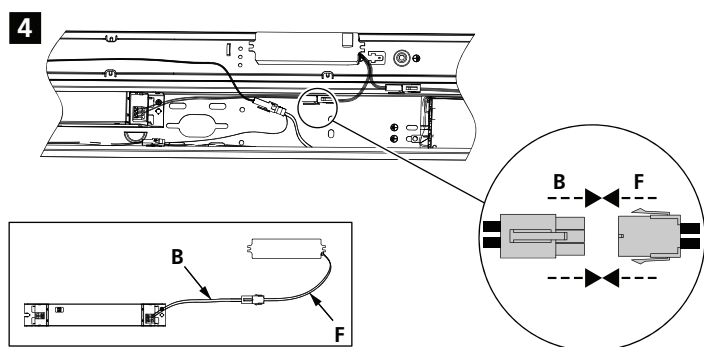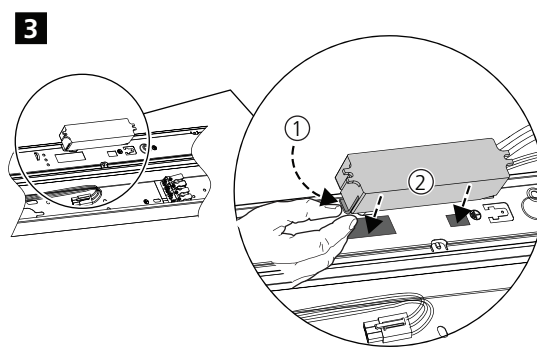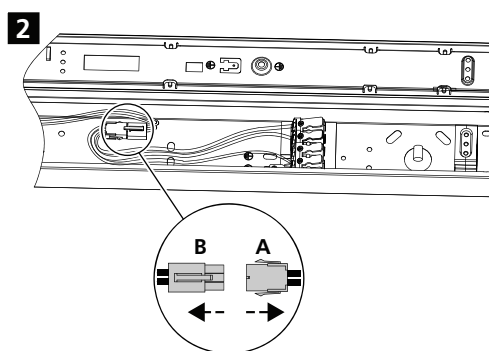

Start Batten ON/OFF MW Sensor KIT

0048486

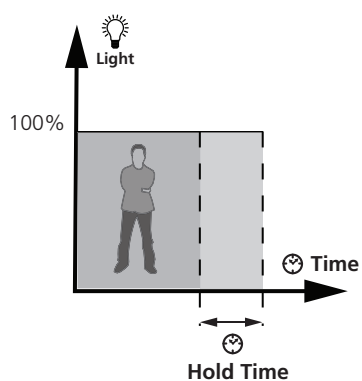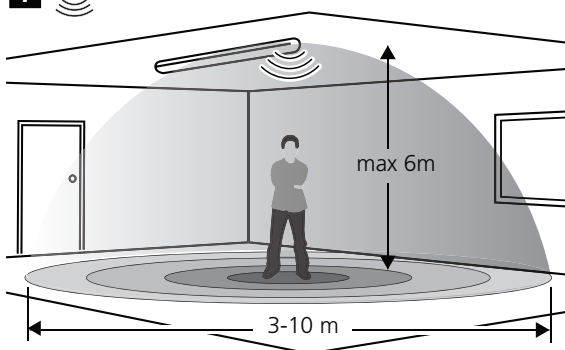

ON



OFF

Detection Area





	1	2	%	Detection Ø
I	●	●	100%	10m
II	○	●	75%	8m
III	●	○	50%	5m
IV	○	○	25%	3m

Hold Time

	3	4	5	⌚
I	●	●	●	5s
II	○	●	●	30s
III	●	○	●	90s
IV	○	○	●	5min
V	●	●	○	20min
VI	○	○	○	30min

Daylight Sensor


	6	7	8	Lux
I	●	●	●	2Lux
II	●	●	○	10Lux
III	○	●	○	30Lux
IV	●	○	○	50Lux
V	○	○	○	Disable

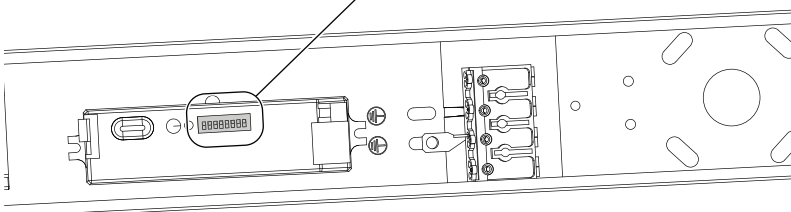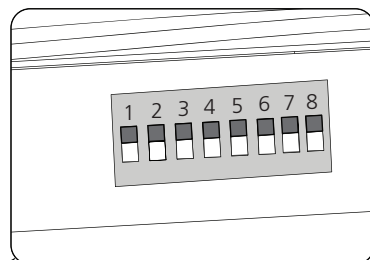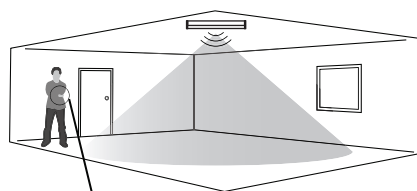

START Batten self Test Emergency kit


0048987

0°C -40°C

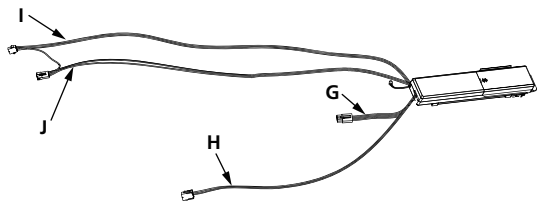


START Batten 600


LED INDICATION		STATUS		COMMENT
 LED Colour	Status	Flashing		
		 ON	 OFF	
GN		∞	-	 Battery Connected and Charging
		0.1 sec	0.1 sec	 Functional Test in Progress
		1.0 sec	1.0 sec	 Duration Test in Progress
RD		∞	-	 Lamp Fault
		1.0 sec	1.0 sec	 Battery Needs Replacing
		0.1 sec	0.1 sec	 Battery Fault
		-	∞	 Emergency Mode

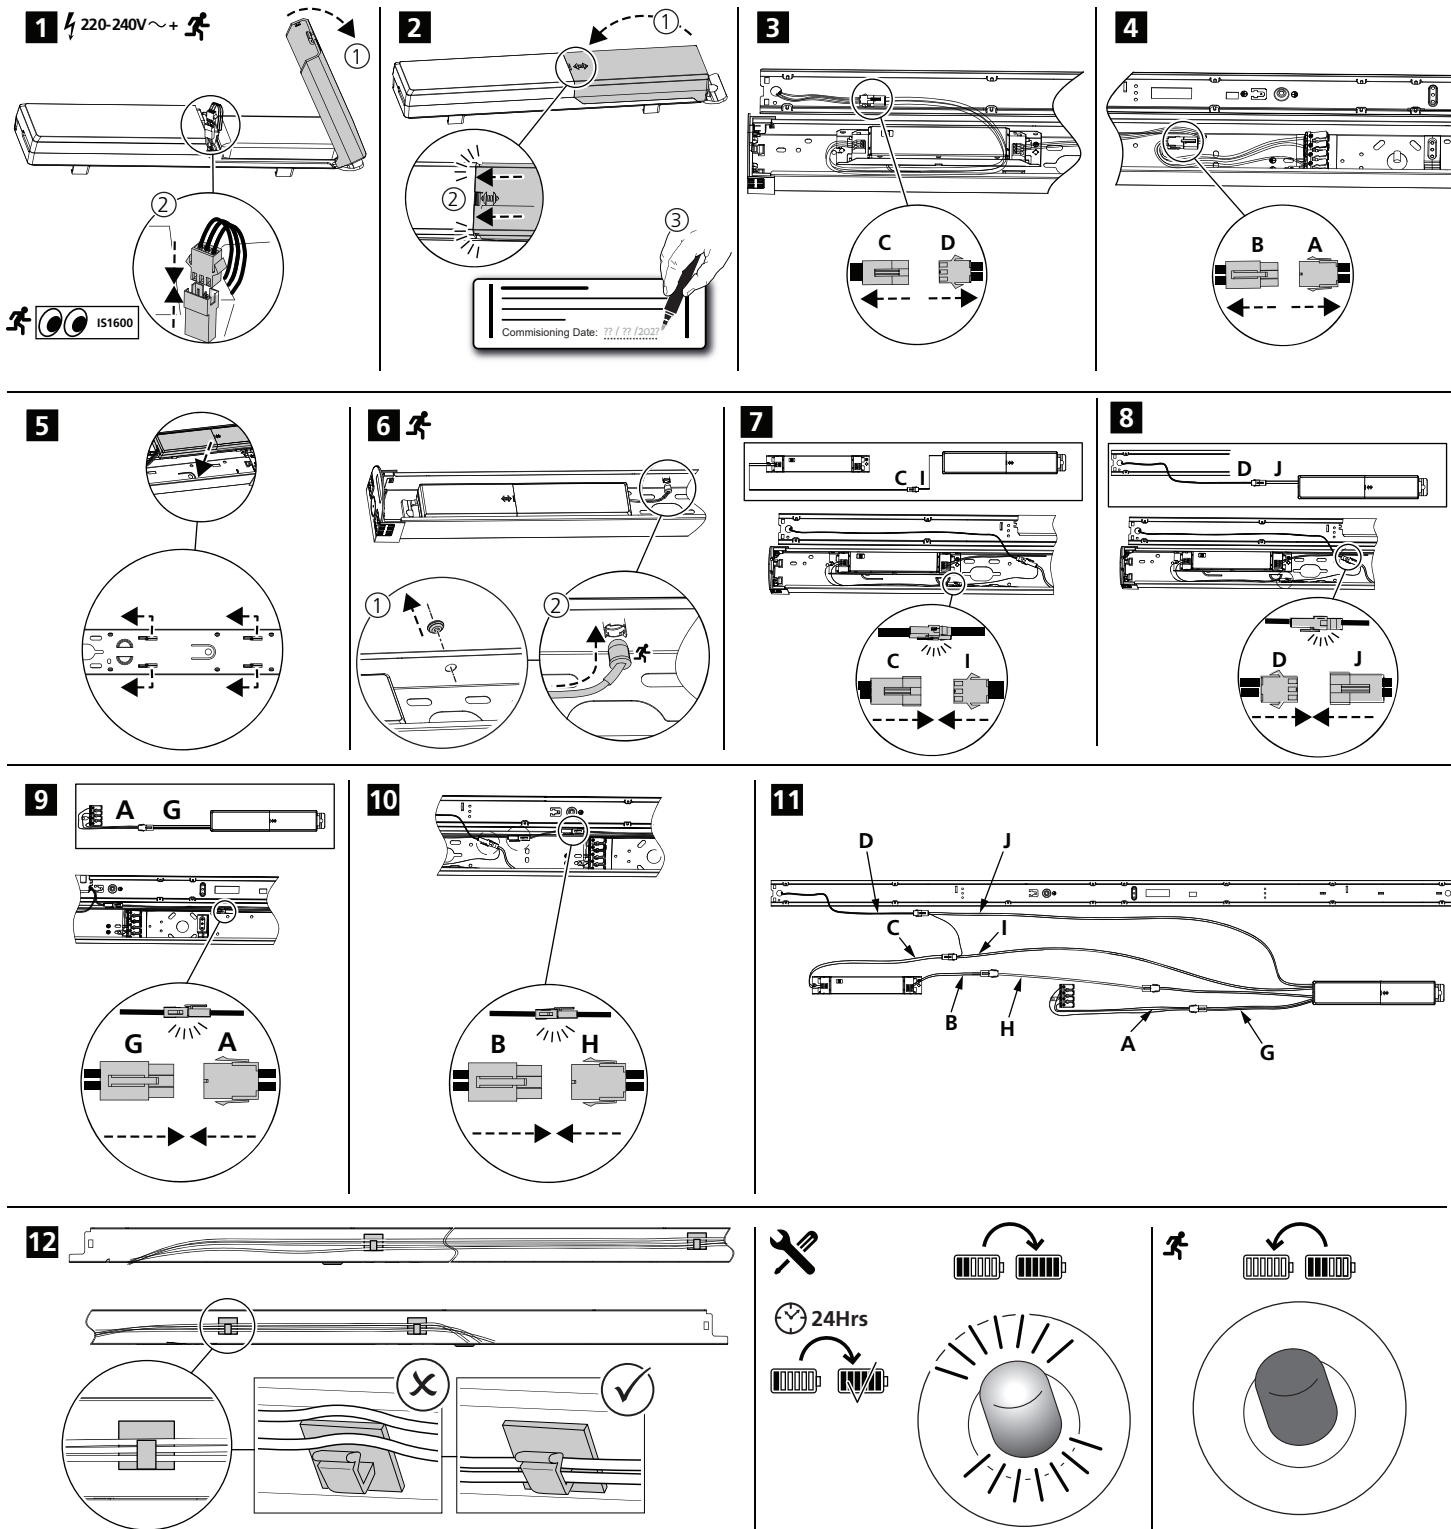


START Batten Self Test Emergency & MW Sensor Kit

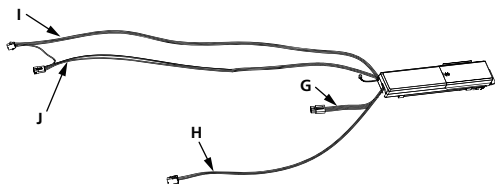


START Batten Self Test Emergency Kit
0048987

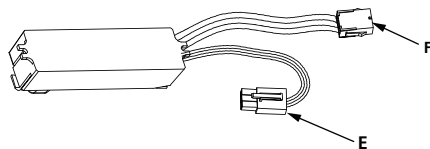

START Batten MW Kit
0048986

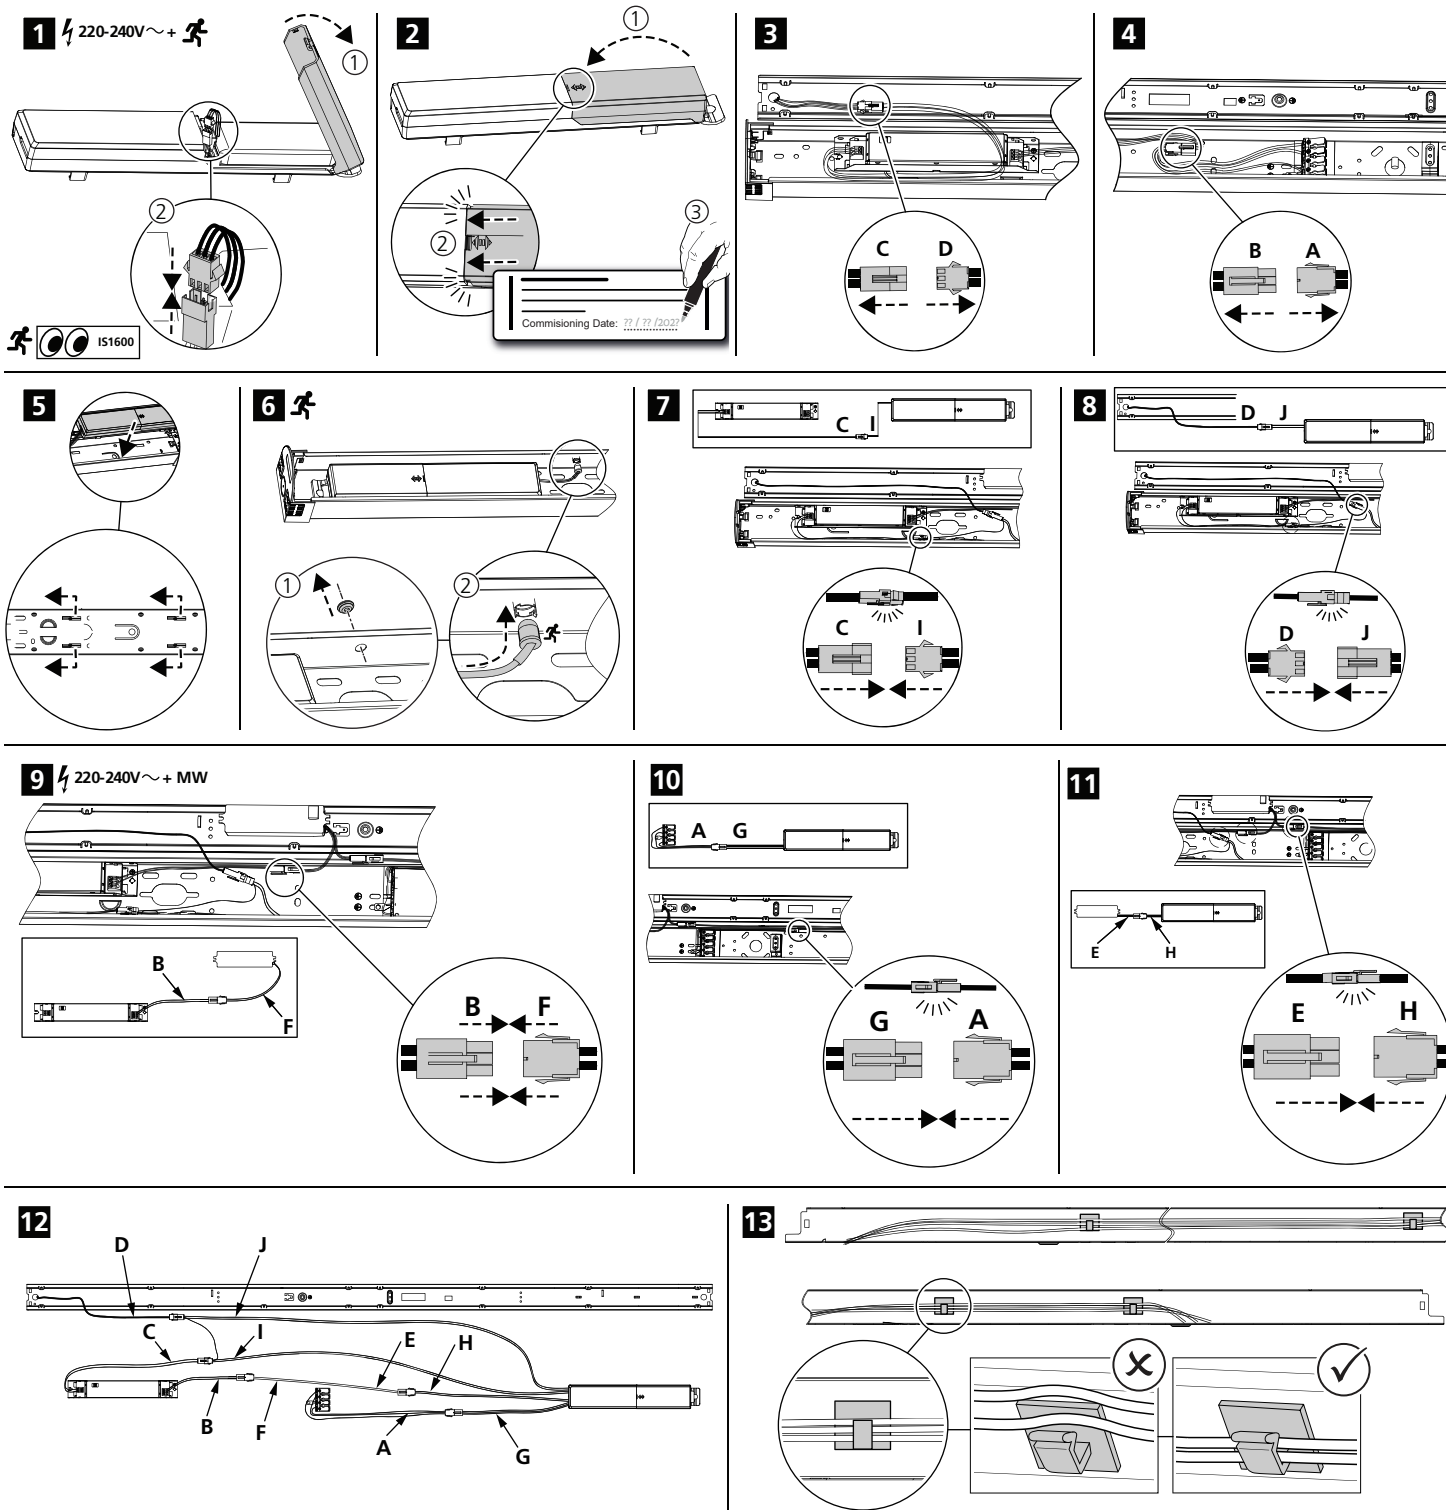

START Batten Suspension kit

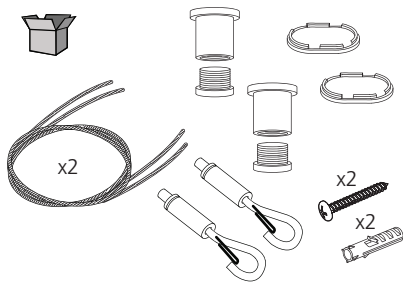

1 START Batten Suspension Kit
0048988

