

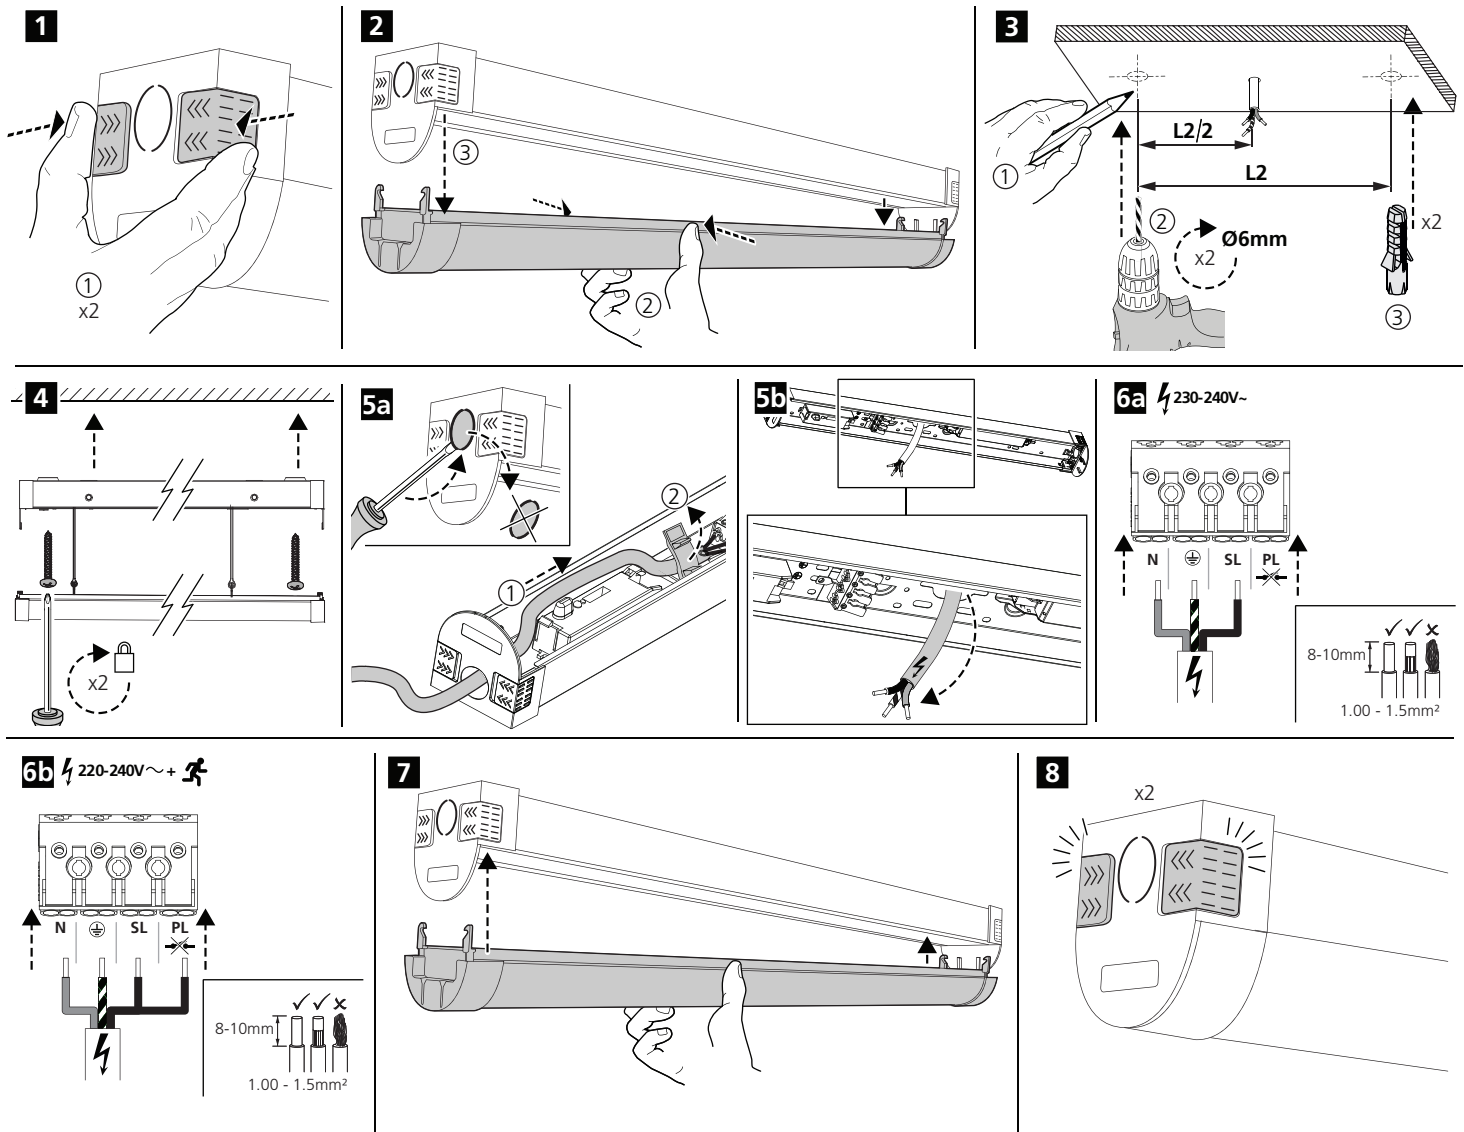


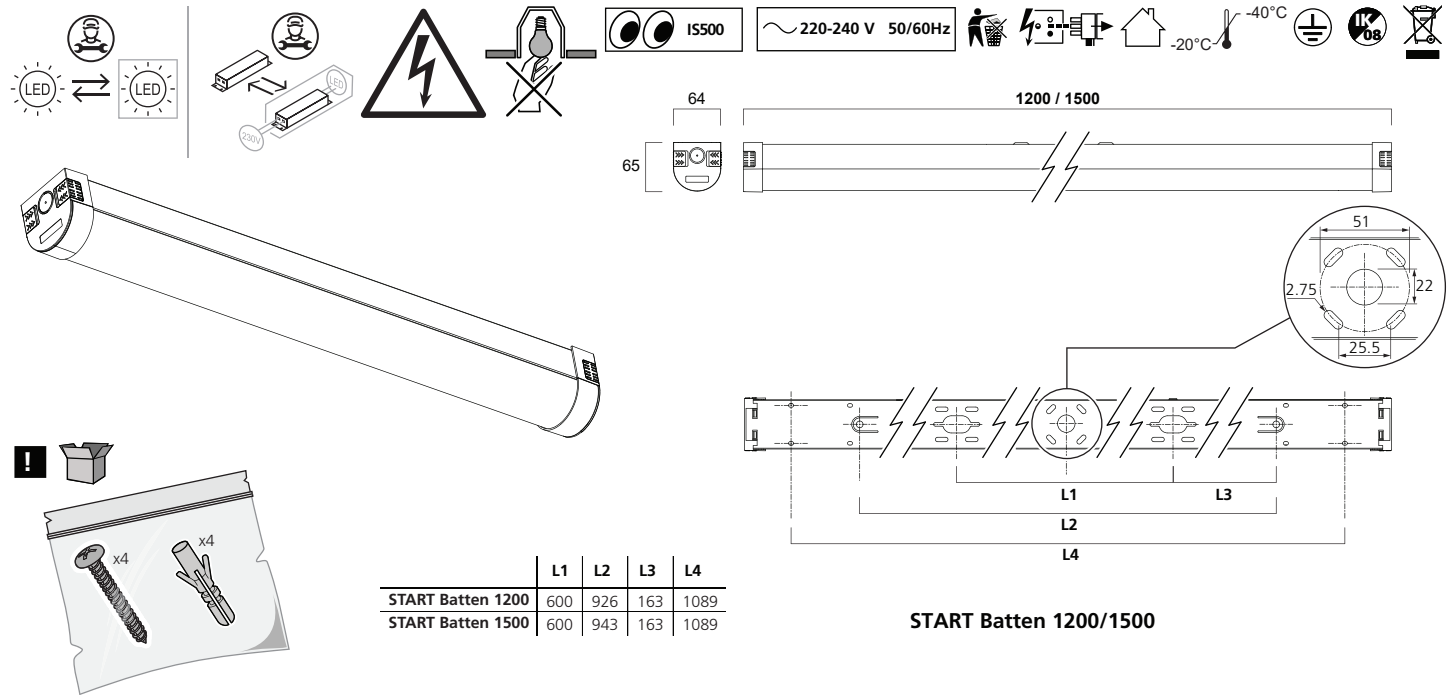

! CCT / Light Output

Light Output






ON
↑
↓
OFF

	1	2	lout(mA)
I	●	●	HO setting
II	○	○	LO setting

OFF

3000K / 4000K

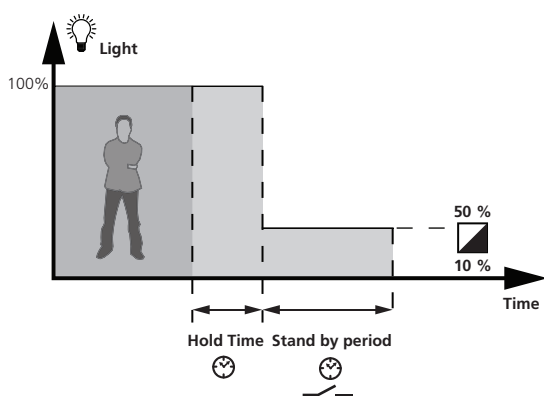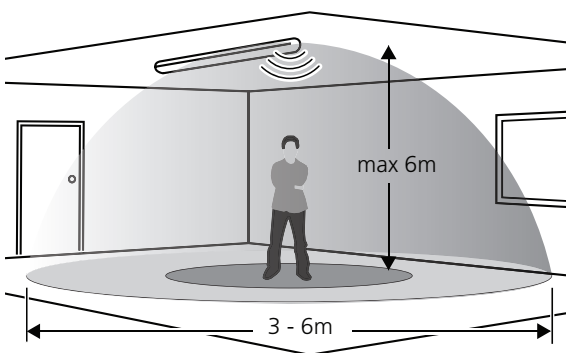

ON
↑
↓
OFF

Detection Area

	1	%	Detection Ø
I	○	100%	6m
II	●	50%	3m

Hold Time

	2	3	⌚
I	○	○	5s
II	○	●	1min
III	●	○	3min
IV	●	●	10min

Daylight Sensor


	4	Lux
I	○	Disable
II	●	30Lux

Stand-by Dimming Level


	5	%
I	○	0%
II	●	20%

Stand-by Period


	6	⌚
I	○	+ ∞
II	●	15min

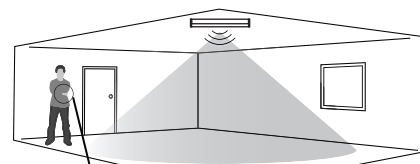

5s ... 25min




OFF



START Batten self Test Emergency kit


0048987

0°C -40°C

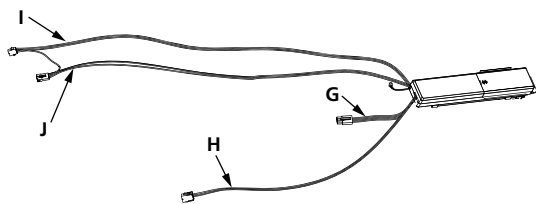


START Batten 600

LED INDICATION		STATUS		COMMENT
LED Colour	Status	Flashing		
		ON	OFF	
GN		∞	-	Battery Connected and Charging
		0.1 sec	0.1 sec	Functional Test in Progress
		1.0 sec	1.0 sec	Duration Test in Progress
RD		∞	-	Lamp Fault
		1.0 sec	1.0 sec	Battery Needs Replacing
		0.1 sec	0.1 sec	Battery Fault
		-	∞	Emergency Mode


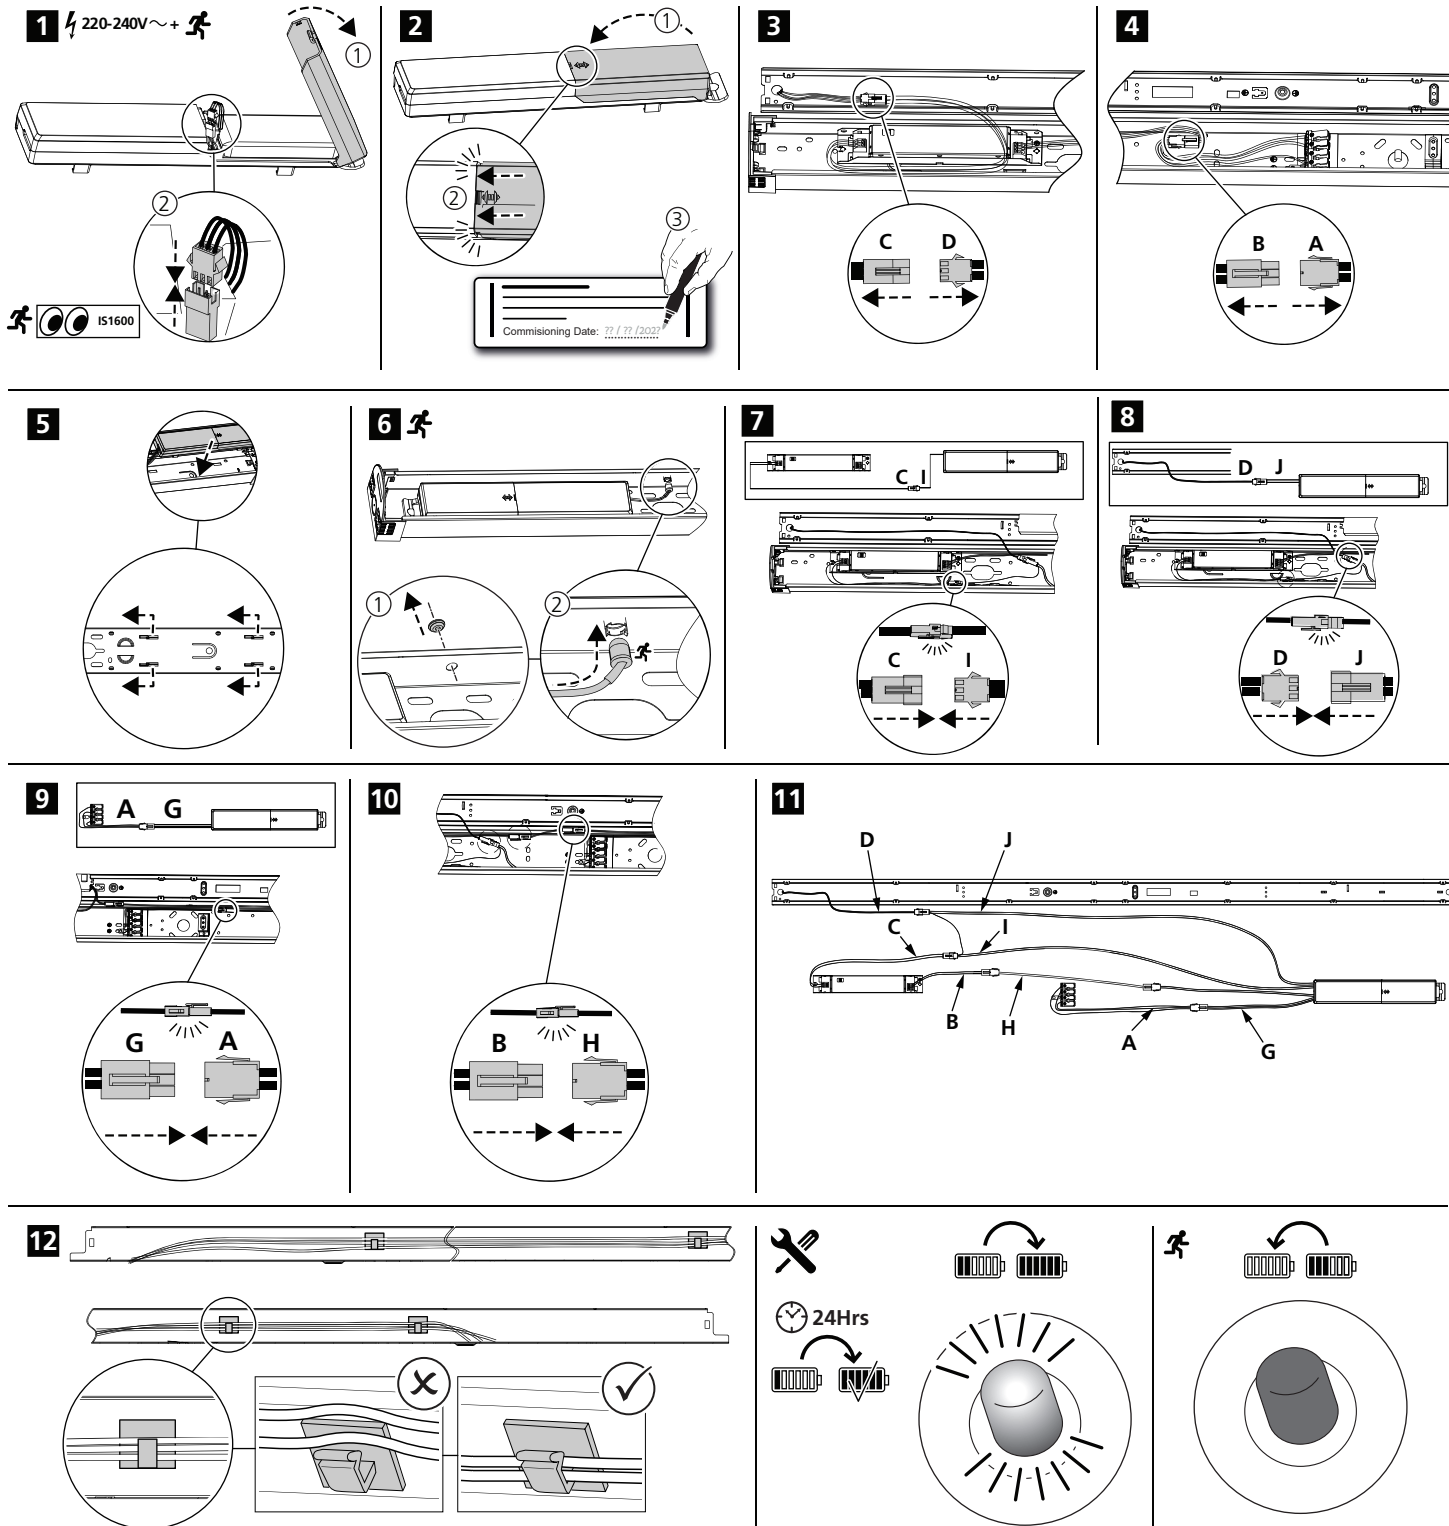


START Batten Suspension kit

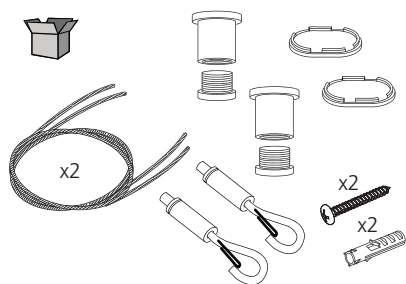

1 START Batten Suspension Kit

0048988

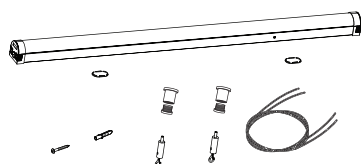

START Batten 1200/1500/1800 884mm

