


BRUKSANVISNING / USER MANUAL

DIS

DIS – asymmetrisk belysningsarmatur för infällt montage i T-profil för indirekt belysning av vägg, hylla, etc.
DIS – asymmetric luminaire for recessed mounting in T-profiles, indirect illumination of walls, shelves, etc.

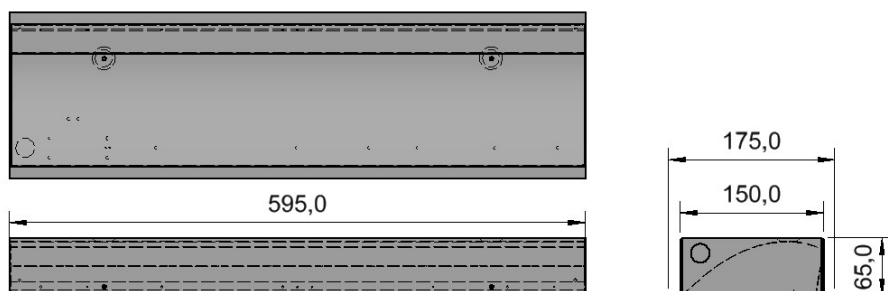

Article	Lenght (mm)	Width (mm)	Height (mm)	c/c (mm)	Weight (Kg)
DIS AS L595 xx	595	175 total/ 150 recessed	65	In T-profile c/c 600	2,5



Montage / Installation

För infällt montage i T-profil c/c 600mm

For recessed mounting in T-profiles c/c 600mm

Inkoppling / Wiring

Standard med 2,5m sladdställ med stickpropp. Varianter med DALI/TW levereras med 2,5m 5-ledarkabel.
As standard with 2,5m connecting cable with plug. Models with DALI/TW is supplied with 2,5m 5-wire connecting cable.

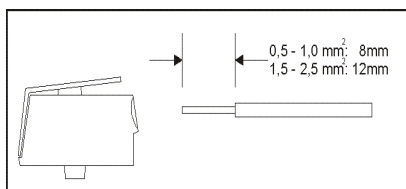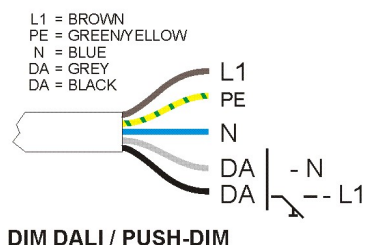

Service / Service

Bryt spänningen före arbete. Utbyte av komponenter får endast utföras av utsedd person.

Rengör med mjuk trasa.

Disconnect power supply before work. Components shall only be replaced by manufacturer or their designated person.

Clean luminaire with soft cloth.

