

Aura LED Luminaire Aperius SR 19W G46d




Installation instructions  
Instructions de montage  
Montageanleitung

IP20

230 V  
50-60 Hz




SELV

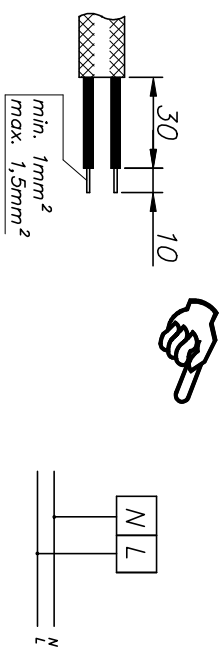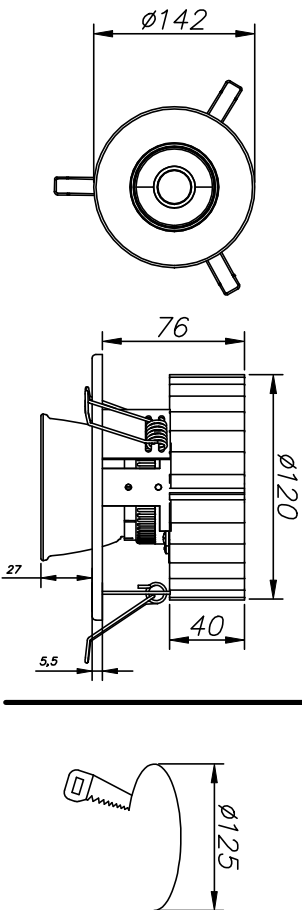


UK – Disconnect the unit before changing the lamp.  
F – Débrancher l'appareil avant de changer la lampe.  
D – Vor dem Auswechseln der Lampe die Leuchte von der Netzspannung trennen.



1

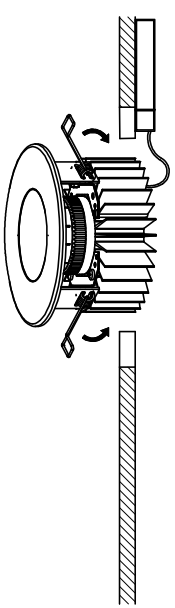

2

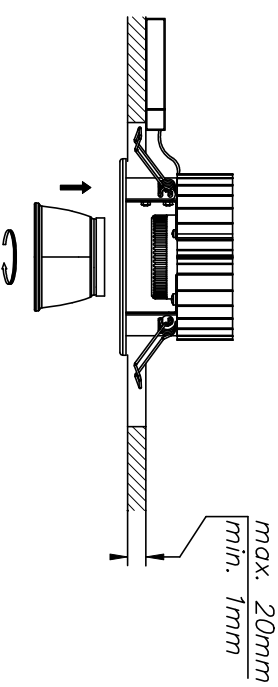

Suitable CompoLED light source

| AURA COMPOLED ARTICLE NO. | REFLECTOR TYPE     | COLOUR TEMP. (K) | CURRENT              | SYSTEM POWER (W) | LUMINAIRE EFFICACY (lm/W) | LUMINOUS INTENSITY (cd) | ENERGY EFFICIENCY CLASS |
|---------------------------|--------------------|------------------|----------------------|------------------|---------------------------|-------------------------|-------------------------|
| 664293                    | 12° reflector, 930 | 3000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 80<br>73                  | 5900<br>10700           | A+<br>A                 |
| 664284                    | 12° reflector, 840 | 4000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 106<br>97                 | 7330<br>13410           | A++<br>A+               |
| 665293                    | 25° reflector, 930 | 3000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 80<br>73                  | 2940<br>5370            | A+<br>A                 |
| 665284                    | 25° reflector, 840 | 4000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 106<br>97                 | 3900<br>7140            | A++<br>A+               |
| 666293                    | 40° reflector, 930 | 3000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 80<br>73                  | 1770<br>3240            | A+<br>A                 |
| 666284                    | 40° reflector, 840 | 4000 K           | @ 350 mA<br>@ 700 mA | 11 W<br>21 W     | 106<br>97                 | 2480<br>4540            | A++<br>A+               |