





Lumination™ LED Luminaires IS-Series IS147A2MDSLVREL IHNS

93012577

Product information

Lumination™ LED Luminaires – IS Series are designed to deliver efficient lighting for commercial applications. These efficient lighting fixtures have a long life and deliver a remarkably efficient 105-110 lumens per watt allowing for lower maintenance and operating costs.

Application areas









Product data

| Dimensions | 260x169x1256mm |
|-------------------------------|--|
| Energy efficiency class (EEC) | A++ |
| IP Rating | 20 |
| Certifications | CB/CE |
| Impact resistance | IK02 |
| Mounting type | Suspended |
| DIALux description | GE - Lumination™ LED Luminaires IS-Series - 3880lm - 38.5W - 3500K - 80CRI - 93012577[SKU] - Suspended / Pendant |
| Dimmability | YES |

Performance data

| Nominal lumens [lm] | 3880 |
|---|------|
| Nominal correlated colour temperature (CCT) [K] | 3500 |
| Colour rendering index (CRI) [Ra] | 80 |
| Total system power | 38.5 |

Electrical data

Controllability Dimmable electronic (DALI)

Logistic data


Product status Available



Lumination™ LED Luminaires IS-Series IS147A2MDSLVREL IHNS

93012577

Photometric Data

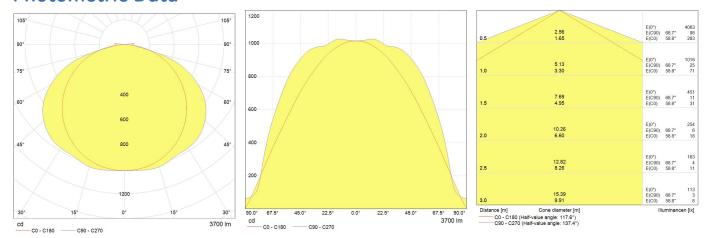

Downloads & Links

Go to the catalog site (HTTP)

Lighting design tools & calculators (HTTP)

Lumination™ LED Luminaires – IS Series Data sheet (PDF)

Installation guide (PDF)

All images/technical drawings and photometric files (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)