



Lumination™ LED Luminaires IS-Series IS147A3MVSLVR IHNS

93012517

Product information

Lumination™ LED Luminaires – IS Series are designed to deliver efficient lighting for commercial applications. These efficient lighting fixtures have a long life and deliver a remarkably efficient 105-110 lumens per watt allowing for lower maintenance and operating costs.

Application areas







Lumination™ LED Luminaires IS-Series IS147A3MVSLVR IHNS

93012517

Product data

Dimensions	260x169x1256mm
Energy efficiency class (EEC)	A++
IP Rating	20
Certifications	CB/CE
Impact resistance	IK02
Mounting type	Suspended
DIALux description	GE - Lumination™ LED Luminaires IS-Series - 4075lm - 34.5W - 4000K - 80CRI - 93012517[SKU] - Suspended / Pendant
Dimmability	YES

Performance data

Nominal lumens [lm]	4075
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80
Total system power	34.5

Electrical data

Controllability Dimmable electronic (0-10V)

Logistic data


Product status Available



Lumination™ LED Luminaires IS-Series IS147A3MVSLVR IHNS

93012517

Photometric Data

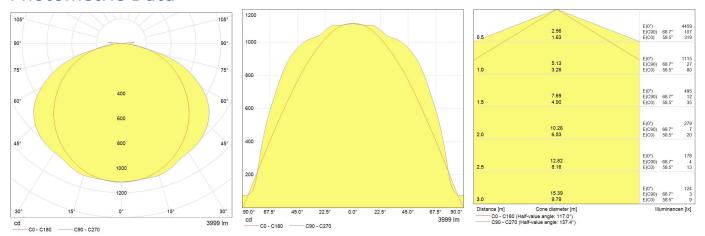

Downloads & Links

Go to the catalog site (HTTP)

Lighting design tools & calculators (HTTP)

Lumination™ LED Luminaires – IS Series Data sheet (PDF)

Installation guide (PDF)

All images/technical drawings and photometric files (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)