



Lumination<sup>TM</sup> LED Luminaires IS-Series IS147B3MDSLVR IHNS **93012520** 

# **Product information**


Lumination<sup>™</sup> LED Luminaires – IS Series are designed to deliver efficient lighting for commercial applications. These efficient lighting fixtures have a long life and deliver a remarkably efficient 105-110 lumens per watt allowing for lower maintenance and operating costs.

#### **Application areas**



A Retail





# С€ СВ



#### Product data

Dimensions	260×169×1256mm
Energy efficiency class (EEC)	A++
IP Rating	20
Certifications	CB/CE
Impact resistance	IK02
Mounting type	Suspended
DIALux description	GE - Lumination™ LED Luminaires IS-Series - 5045lm - 43.5W - 4000K - 80CRI - 93012520[SKU] - Suspended / Pendant
Dimmability	YES

## Performance data

Nominal lumens [lm]	5045
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80
Total system power	43.5

#### **Electrical data**

Controllability

Dimmable electronic (DALI)

## Logistic data


Product status

Available





#### **Photometric Data**

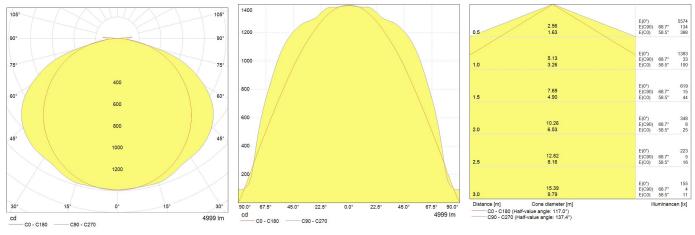

#### Downloads & Links

Go to the catalog site (HTTP)

Lighting design tools & calculators (HTTP)

Lumination<sup>™</sup> LED Luminaires – IS Series Data sheet (PDF)

Installation guide (PDF)

All images/technical drawings and photometric files (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)