


Aura Lunaria family G3

Aura Lunaria, Aura Lunaria Pro and Aura Lunaria Pro mini



The Aura Lunaria family is an award winning revolutionary LED panel. It is used as lighting for standard commercial low ceiling grids typically used to replace fluorescent luminaires.



The panel is the best solution to meet your needs in offices, schools and other commercial applications. The Aura Lunaria LED panel does not result in eye exhaustion and provides uniform luminance all over the light panel. It can be delivered with a wide variety of cables and connectors to suit the needs of the installation.

Customize your LED-panels with unique accessories, such as the skylight module or one of the recess frames. Aura Lunaria G2 was awarded the International SEAD Global Efficiency Medal in the category planar luminaires.

The latest edition of Aura Lunaria is the tunable white version. See separate product leaflet.

- Energy efficient
- No UV-radiation
- Low weight
- 50,000 hours lifetime (L70B10)
- On/off or DALI dimmable
- Shallow height - suitable for low depth ceilings
- Up to 133 lm/W
- UGR <19 for Pro version
- < 3000 cd/m² for Pro version
- Internal cables are halogen free
- 5 year guarantee



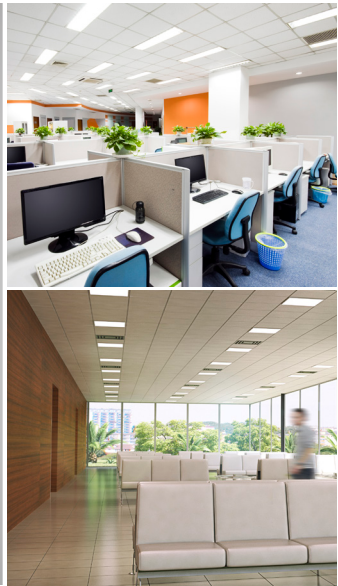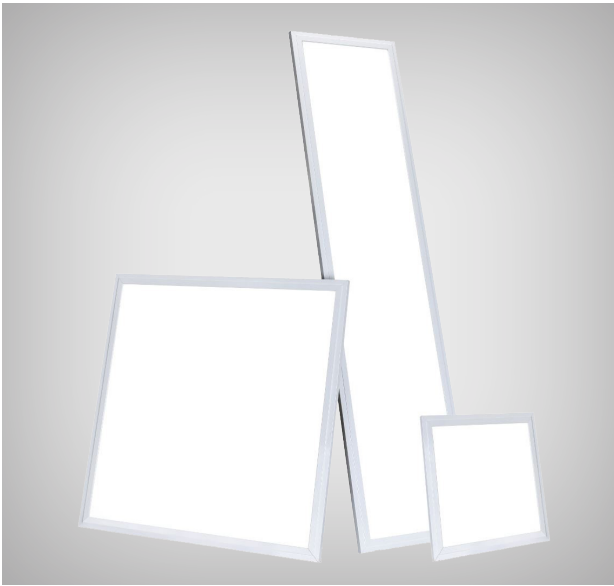


APPLICATIONS: Offices, schools, hospitals, commercial applications.

MATERIAL: Frame colour white RAL 9010.

INSTALLATION AND CONNECTION: Fixed article numbers are delivered with 2,5 m AC input cable (halogen free) with wall-plug and 2,5 m DALI cable.

TECHNICAL DATA: IP40 (standard), IP44/IP40 (front/back). 230-240 V AC, DC input: 186-250 V, 50-60 Hz, SDCM 3. Ambient temperature: -20°-+35°. Power factor over 0.9. CRI > 80. LED lifetime 50 000 hours (L70B10 at 25°C Ta). Driver lifetime up to 100 000 h at 25°C Ta. CE. ENEC. LED panel, 3000K/4000K. 5000K on request.


Aura Lunaria (Pro) is available in 3000K, 4000K and 5000K and in the following size: 295x295, 595x595, 1195x295, 620x620 and 1245x307. The standard version is IP40 and IP44 (front)/IP40 (back) is available on request. All versions can be kitted with different drivers and cables to suit your installation, and we offer drivers with on/off, DALI, DSI, Switchdim and emergency lighting. Aura Lunaria Pro Mini can be driven up to 700mA for maximum light output up to 1500 lumen and Aura Lunaria (Pro) can be driven up to 1050mA for maximum light output up to 4900 lumen.

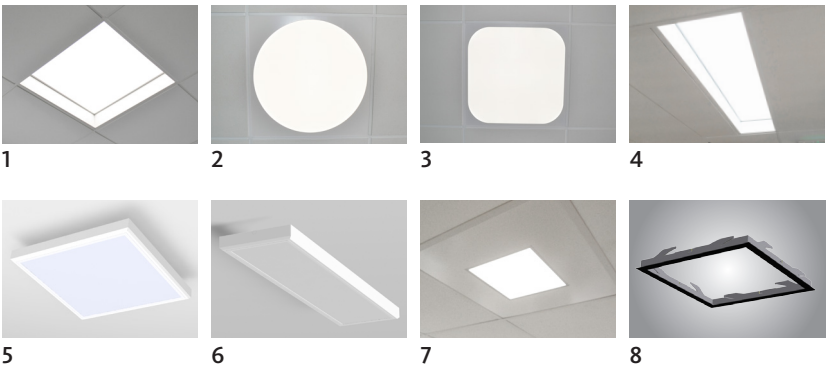

Models	Number of luminaires per MCB			
	Type	B16	C16	C10
Aura Lunaria Pro Mini	ON/OFF	43	73	45
Aura Lunaria Pro Mini	DALI	43	73	45
Aura Lunaria (Pro) 700mA	ON/OFF	43	73	45
Aura Lunaria (Pro) 1050mA	ON/OFF	30	51	31
Aura Lunaria (Pro)	DALI	24	40	24




Lumen maintenance	Calculated LED lifetime (Ta) 25°
L70B50	121 000 h
L80B50	77 000 h
L90B50	38 000 h


The calculations are based on TM-21 at ambient temperature (Ta) 25°C.

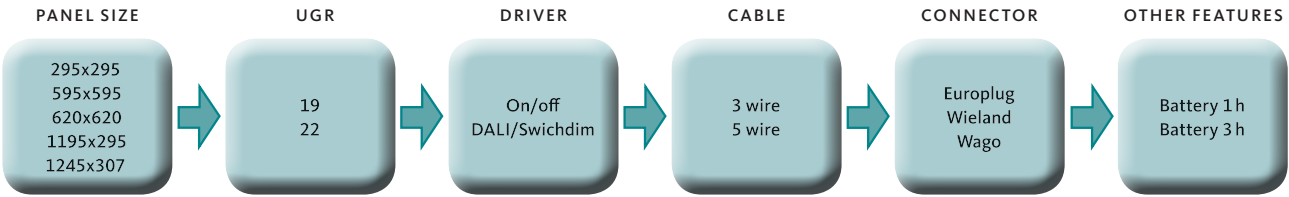


Lunaria can be configured in a variety of ways.

MODELS	TYPE	SYSTEM POWER (W)	LUMINOUS FLUX (lm)	LUMINAIRE EFFICACY (lm/W)	DIMENSIONS (mm)	WEIGHT (kg)	ARTICLE NO. ON/OFF	ARTICLE NO. DALI
	Fixed article numbers are delivered with 2,5 m AC input cable (halogen free) with wall-plug and 2,5 m DALI cable							
	Aura Lunaria G3, 595x595, 3000K	26	3234	124	595x595x9,3	3,6	468503	468523
	Aura Lunaria G3, 595x595, 4000K	26	3409	131	595x595x9,3	3,9	468504	468524
	Aura Lunaria Pro G3, 595x595, 3000K	26	3059	118	595x595x9,3	3,6	468513	468533
	Aura Lunaria Pro G3, 595x595, 4000K	26	3234	124	595x595x9,3	3,9	468514	468534
	Aura Lunaria Pro Mini G3, 3000K	15	1420	95	295x295x9,3	1,0	468515	468535
	Aura Lunaria Pro Mini G3, 4000K	15	1500	100	295x295x9,3	1,0	468516	468536
	Accessories – Aura Lunaria, Aura Lunaria Pro, Aura Lunaria Pro Mini							Article no.
	Surface Mounting Box 295X295 (image 5)							82610030
	Surface Mounting Box 595X595 (image 5)							82610060
	Surface Mounting Box 1195X295 (image 6)							82610120
	Skylight Module 295X295 (image 1)							82612030
	Skylight Module 595X595 (image 1)							82612060
	Skylight Module 1195X295 (image 4)							82612120
	Mounting Frame For Plaster Ceilings 295X295 (image 8)							82613030
	Mounting Frame For Plaster Ceilings 595X595 (image 8)							82613060
	Mounting Frame For Plaster Ceilings 1195X295							82613120
	Frame For Round Light Opening 595X595 (image 2)							82614001
	Frame With Round Corners 595X595 (image 3)							82614002
	Frame For Lunaria Mini 595X595 (image 7)							82614003
	Mounting E-Edge G3							82614100
	Mounting Ds-Ceiling G3							82614200

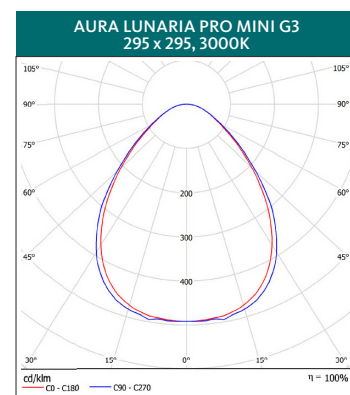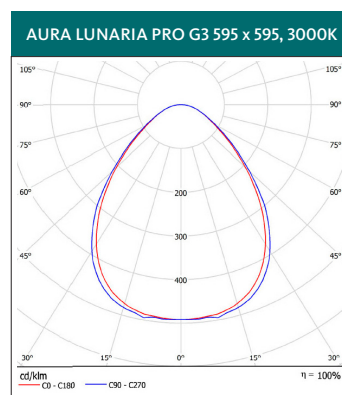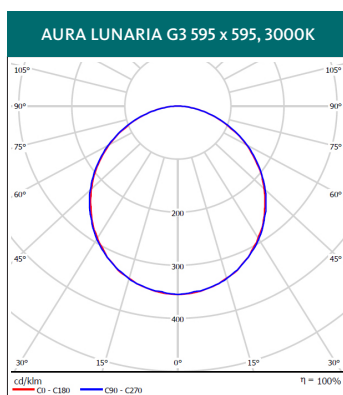


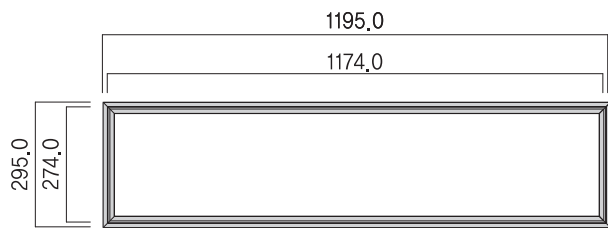


AURA LUNARIA 1195 X 295 mm

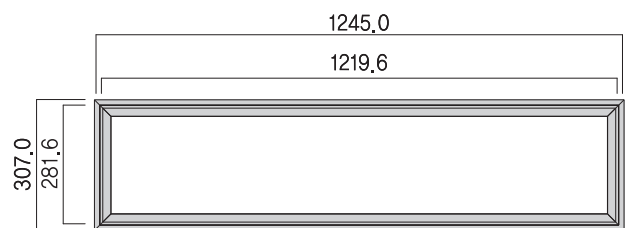


AURA LUNARIA 1245 X 307 mm

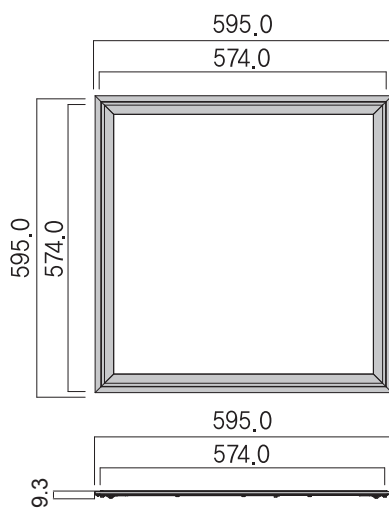

AURA LUNARIA PRO 595 X 595 mm

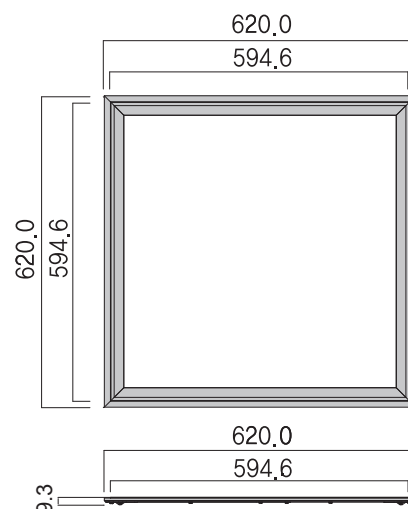

AURA LUNARIA, 620 X 620 mm

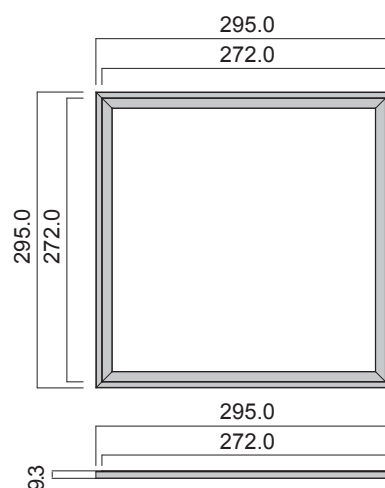

AURA LUNARIA PRO MINI

All specifications are subject to change. For the latest version of this product leaflet, please visit www.auralight.com/products.

2016-04-19