


LUM – Technical Information

PUNCTOLED TRACK WT S 3000K
 PUNCTOLED TRACK WT S 4000K
 PUNCTOLED TRACK WT L 3000K
 PUNCTOLED TRACK WT L 4000K

PUNCTOLED TRACK BL S 3000K
 PUNCTOLED TRACK BL S 4000K
 PUNCTOLED TRACK BL L 3000K
 PUNCTOLED TRACK BL L 4000K

S=Small
 L=Large
 WT=White
 BL=Black

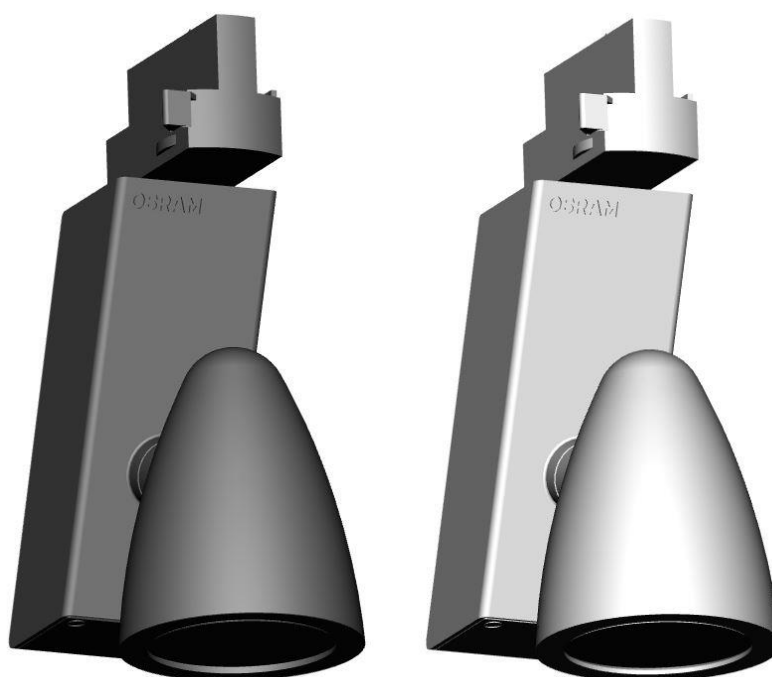

With short payback times, tool-free mounting and compatibility with common track systems, PUNCTOLED® Track is the easy-to-handle track light for basic accentual lighting within the shop and retail application.

Table of contents:



Tender Text	2
A) Technical Information	2
1) Housing, Mounting and Accessories	2
2) Electrical Installation	3
3) Optical features	3
B) Logistic Data	4

Tender Text

- Excellent price-performance ratio
- Plug & Play (tool-free mounting)
- 350° rotatable, 350° tiltable
- Universal track adapter, compatible with common 3-phase tracks

A) Technical Information

1) Housing, Mounting and Accessories

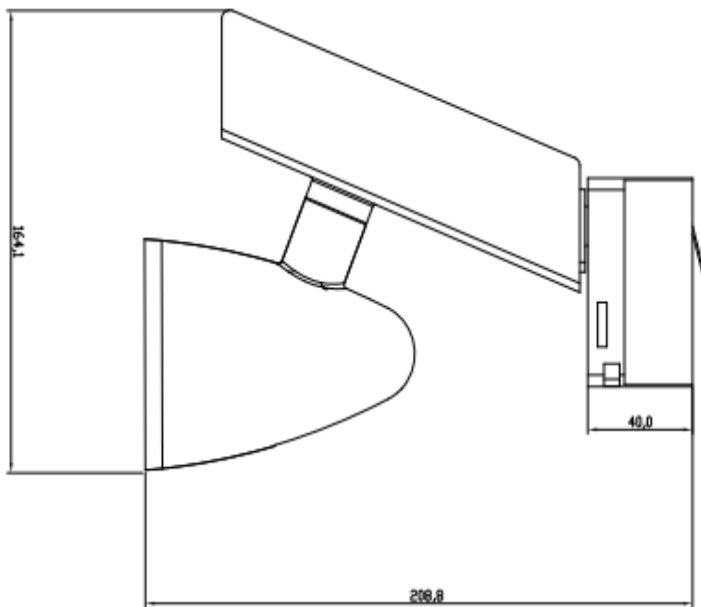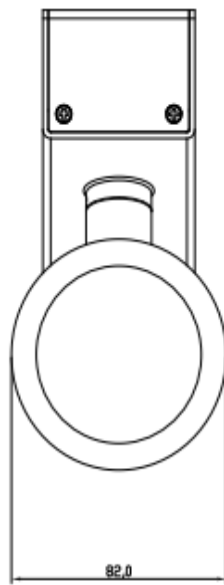Product name	PUNCTOLED® TRACK S 3000K/4000K	PUNCTOLED® TRACK L 3000K/4000K
Body material	Aluminum	
Color of the luminaire	WT=White, BL=Black	
Cover material	---	
Type of cover	---	
Reflector material	ABS	
Symmetry	---	
Adjustable	350° rotatable, 350° tiltable	
Dimensions LxHxB [mm]	 	
Mounting type	Track light	
Mounting hole [mm]	---	
Installation height [mm]	---	
Ceiling thickness [mm]	---	
Net weight [g]	820	

Protection class	I
Type of protection (IP code)	IP40
Shock resistance (IK code)	IK00
Ambient temperature [°C]	-20...40
Storage temperature [°C]	-20...80
Body temperature [°C]	≤ 60
Approval marks	CE
Environment	RoHS


2) Electrical Installation

- Connection with mains power in accordance with national regulations!

Product name	PUNCTOLED® TRACK S 3000K/4000K	PUNCTOLED® TRACK L 3000K/4000K
Nominal/Rated wattage [W]	20	32
Mains voltage [V]	220...240	
Rated current [mA]	92	142
Mains frequency [Hz]	50 / 60	
Power factor	≥ 0,9	
Connection to grit	3 phase adaptor	
Ballast / Control gear	Internal ECG	
Suitable cables/Cable preparation	na	
Dimmable	no	
Max. units per circuit breaker [pcs]	50	25

3) Optical features

Product name	PUNCTOLED® TRACK S 3000K/4000K		PUNCTOLED® TRACK L 3000K/4000K	
Color temperature ± 10% [K]	3000	4000	3000	4000
Luminous flux ± 10% [lm]	1900	2000	2800	2900
Chromaticity coordinates	x: 0,4317 y: 0,4010	x: 0,3788 y: 0,3760	x: 0,4346 y: 0,4063	x: 0,3815 y: 0,3799
Light color	Warm white	Neutral white	Warm white	Neutral white
McAdams	≤ 3			
Color rendering index Ra (CRI)	≥ 80			
Beam angle ± 5% [°]	36			

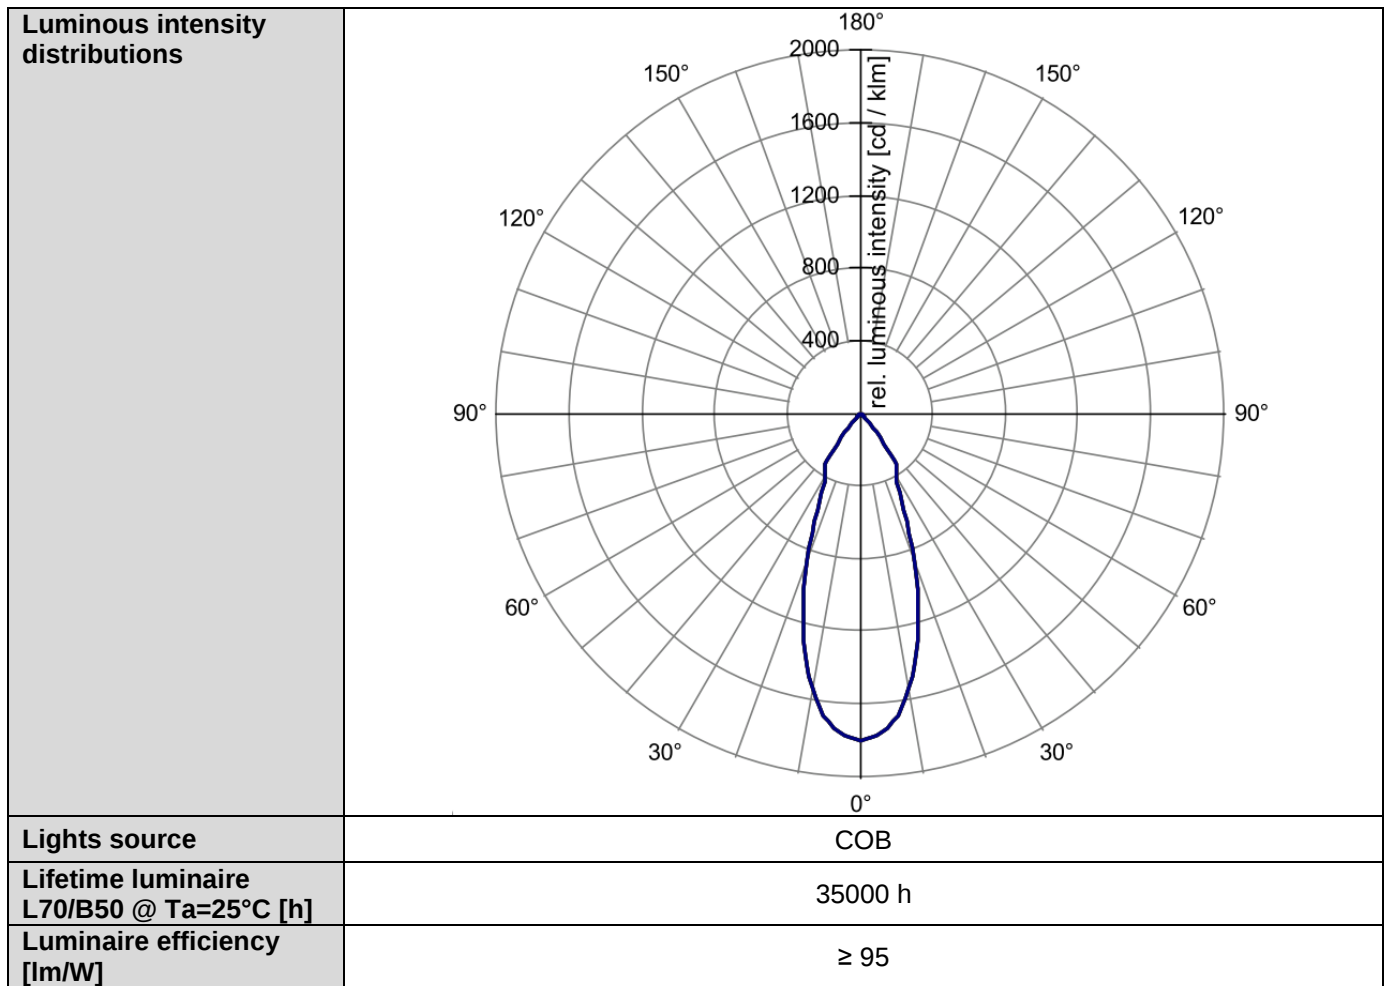

B) Logistic Data

Product	IC	MLFB	EAN10	EAN40	SU
PUNCTOLED TRACK WT S 3000K	AM014930055	0DP33A77153R	4052899981249	4052899981256	4x1
PUNCTOLED TRACK WT S 4000K	AM014920055	0DP33A77153S	4052899981263	4052899981270	4x1
PUNCTOLED TRACK WT L 3000K	AM014910055	0DP33A77303R	4052899981287	4052899981294	4x1
PUNCTOLED TRACK WT L 4000K	AM014900055	0DP33A77303S	4052899981300	4052899981317	4x1
PUNCTOLED TRACK BL S 3000K	AM014890055	0DP33A77151R	4052899981324	4052899981331	4x1
PUNCTOLED TRACK BL S 4000K	AM014880055	0DP33A77151S	4052899981348	4052899981355	4x1
PUNCTOLED TRACK BL L 3000K	AM014870055	0DP33A77301R	4052899981362	4052899981379	4x1
PUNCTOLED TRACK BL L 4000K	AM014860055	0DP33A77301S	4052899981386	4052899981393	4x1