


EVO



η_{ef} (lm/W)
136–157



LED linear fittings

Body:

White painted metal sheet

Optic:

CN – narrow 30°

CW – wide 60°

CEW – extra wide 110°

CRA – retail asymmetric

Application:

Surface or pendant installation

EVO.../R - throw wiring for a line installation through wiring.

Accessories:

ZH/UNI2 – universal 2-wires suspension


EVOSPOJ - connection part for a line installation

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	×	×	●
●	×	○	○	×	×	×	×	×


● default

○ optional


×

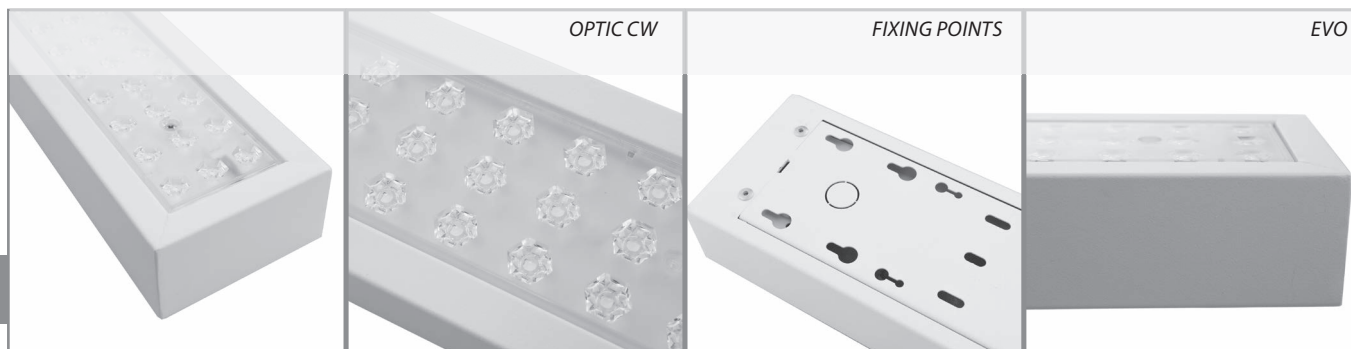 not possible



EVO	6000	L	4	CW	/ND
luminaire type	Light output	body lenght: S = 600 mm XM = 900 mm M = 1200 mm L = 1500 mm	Color temperature 3 = 3000K, 4 = 4000K,	Optic CN – narrow 30° CW – wide 60° CEW – extra wide 110° CRA – retail asymmetric	Driver type: ND – no dimmable DALI – dimmable DALI




EVO CW






EVO CEW




EVO CN



EVO CRA

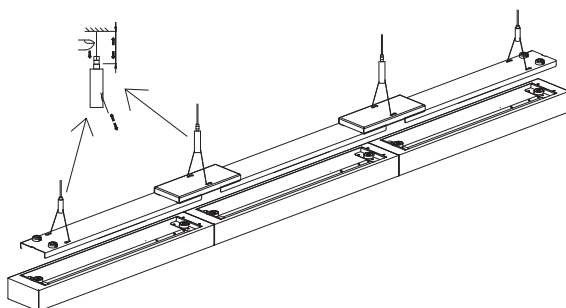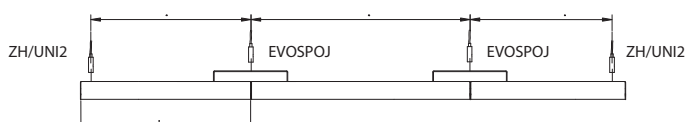

EVO R

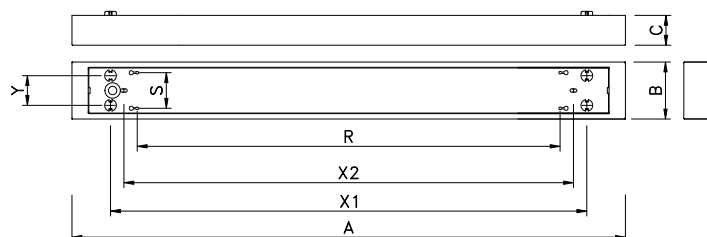

	W	Im*	A	B	C	X1	X2	Y	R	S	kg
EVO2500 S	14	2 200	610	96	50	480	435	50	390	60	1,4
EVO3500 S	25	3 400	610	96	50	480	435	50	390	60	1,4
EVO4000 XM	25	3 800	896	96	50	640	640	50	670	60	2,4
EVO5000 XM	37	5 200	896	96	50	640	640	50	670	60	2,4
EVO5000 M	33	5 000	1182	96	50	950	-	50	900	60	3
EVO7000 M	48	7 000	1182	96	50	950	-	50	900	60	3
EVO6000 L	38	5 850	1468	96	50	1180	-	50	1230	60	4
EVO9000 L	60	8 700	1468	96	50	1180	-	50	1230	60	4

Im – luminaire light output * - all optic types

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.