




η_{ef} (lm/W)
103-139

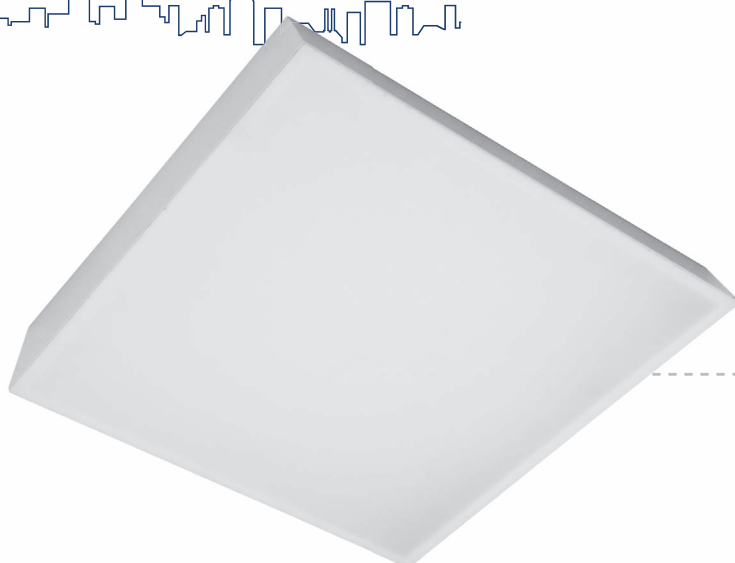

LAB A KO



LAB A KO



LAB A KN

Recessed LED fittings IP65

Body:

White painted (RAL 9016) galvanized metal sheet

Optic:

KO - opal PS cover

KN - microprismatic PS cover

HO - smooth opal PS cover

PCO - opal PC cover

Application:

Recessed - lighting for installation into false ceiling with visible supporting structure (both 600x600 or 625x625 modules)

Using accessories LABRAM a fitting can be also installed as surface. Installation into a gypsum plasterboard ceiling can be done with a QVESTRAM frame.

The fixture can not be open - emergency module no available.

Versions:

600 – for 600 module / 625 – for 625 module

Accessories:

QVESTRAM - a frame for recessed installation into gypsum plasterboard ceiling

LABRAM - a frame for surface installation / VESTRAMA600 – white painted metal frame for recessed installation into gypsum plasterboard ceiling

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
●	×	○	○	×	×	×	×	●

● default

○ optional

×

not possible

LAB	W	lm		modul 600		modul 625		C	kg
		KO	KN	A	B	A	B		
LAB3000A	23	3 100	3 200	596	596	622	622	85	5,0
LAB4000A	32	4 100	4 200						
LAB5000A	42	5 200	5 400						
LAB6000A	55	6 500	6 900						
LAB4000C	32	4 000	4 200	1 196	296	1 245	310	85	5,0
LAB6000C	57	6 200	6 500						
LAB4000A / 90	32	3 400	3 500	596	596	622	622	85	5,0
LAB6000A / 90	55	5 300	5 700						

lm - luminaire light output

