


Product Environmental Profile

Thorsman WL 6800lm, 55W, Schuko Soc, USB




General information

Representative product	Thorsman WL 6800lm, 55W, Schuko Soc, USB - IMT47272
Description of the product	The main purpose of the work lamp is to provide portable 6800lm lighting ,USB charging socket,AC socket.
Functional unit	The work lamp can provide portable lighting, and USB charging socket is integrated.The function unit is accordance with the following technical data: -IP 54 -Operating Voltage:220-240 V ac -Reference standard: EN IEC 60598-1 -Current drawn from USB socket:<2.4A -AC socket load:<16A -Operating Temperature: -25°C+40°C -Storage Temperature: -40°C+85°C

Constituent materials

Reference product mass	3522 g including the product, its packaging and additional elements and accessories
-------------------------------	---

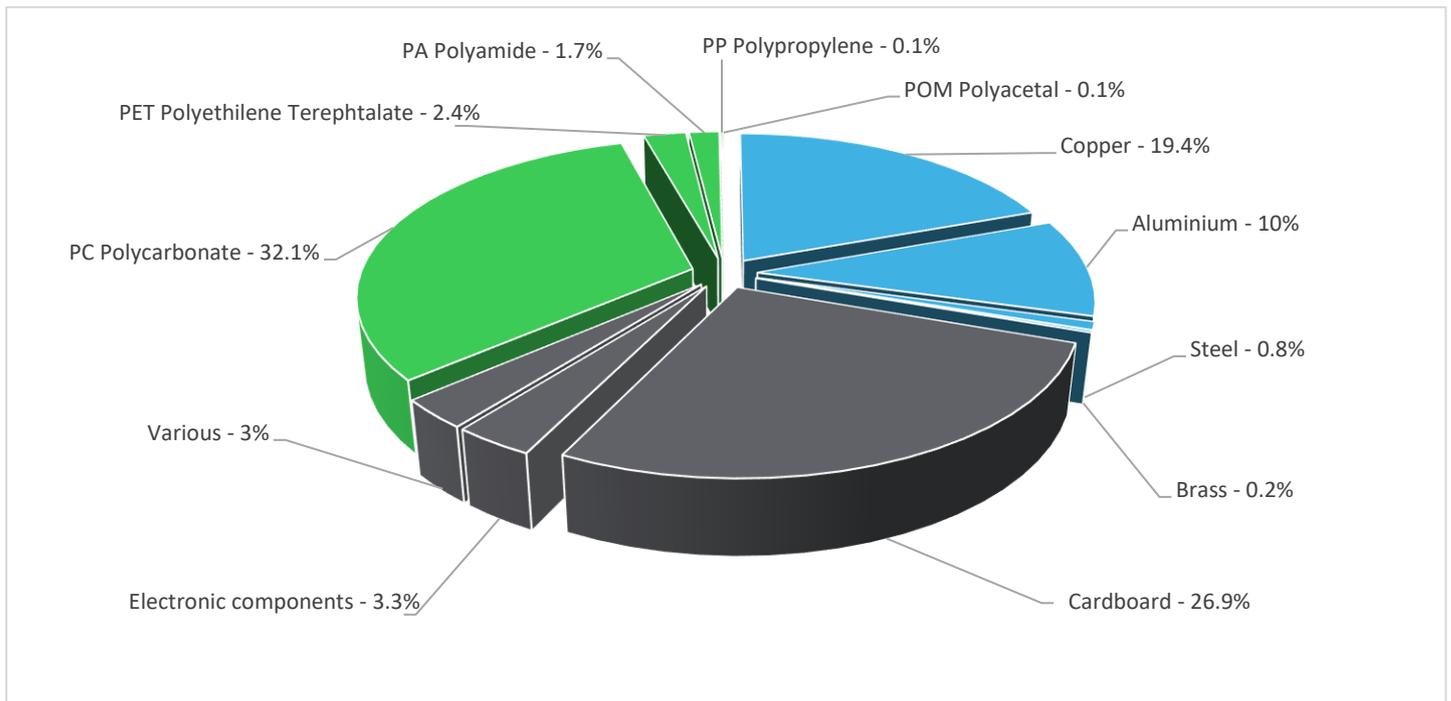

Plastics	36.4%
Metals	30.4%
Others	33.2%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Thorsman WL 6800lm, 55W, Schuko Soc, USB presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 922 g, consisting of cardboard (100%) Product distribution optimised by setting up local distribution centres
Installation	Ref IMT47272 does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic card (160g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 37% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed			
Use scenario	The product is in active mode 30% of the time with a power use of 49.303W and in stand-by mode 70% of the time with a power use of 0.6W, for 10 years.			
Geographical representativeness	Europe			
Technological representativeness	The main purpose of the work lamp is to provide portable 6800lm lighting ,USB charging socket,AC socket.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR

Compulsory indicators

Thorsman WL 6800lm, 55W, Schuko Soc, USB - IMT47272

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.03E-03	1.96E-03	0*	0*	7.07E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	6.70E-01	1.28E-01	2.07E-03	2.08E-04	5.39E-01	8.12E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	7.09E-02	2.10E-02	4.78E-04	5.05E-05	4.91E-02	2.57E-04
Contribution to global warming	kg CO ₂ eq	1.94E+02	4.85E+01	4.54E-01	4.99E-02	1.45E+02	5.70E-01
Contribution to ozone layer depletion	kg CFC11 eq	2.18E-04	1.07E-05	0*	0*	2.07E-04	2.27E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	4.20E-02	1.05E-02	1.48E-04	1.55E-05	3.12E-02	8.15E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.44E+03	4.70E+00	0*	0*	3.43E+03	0*
Total Primary Energy	MJ	1.38E+04	6.07E+02	6.43E+00	0*	1.32E+04	3.85E+00

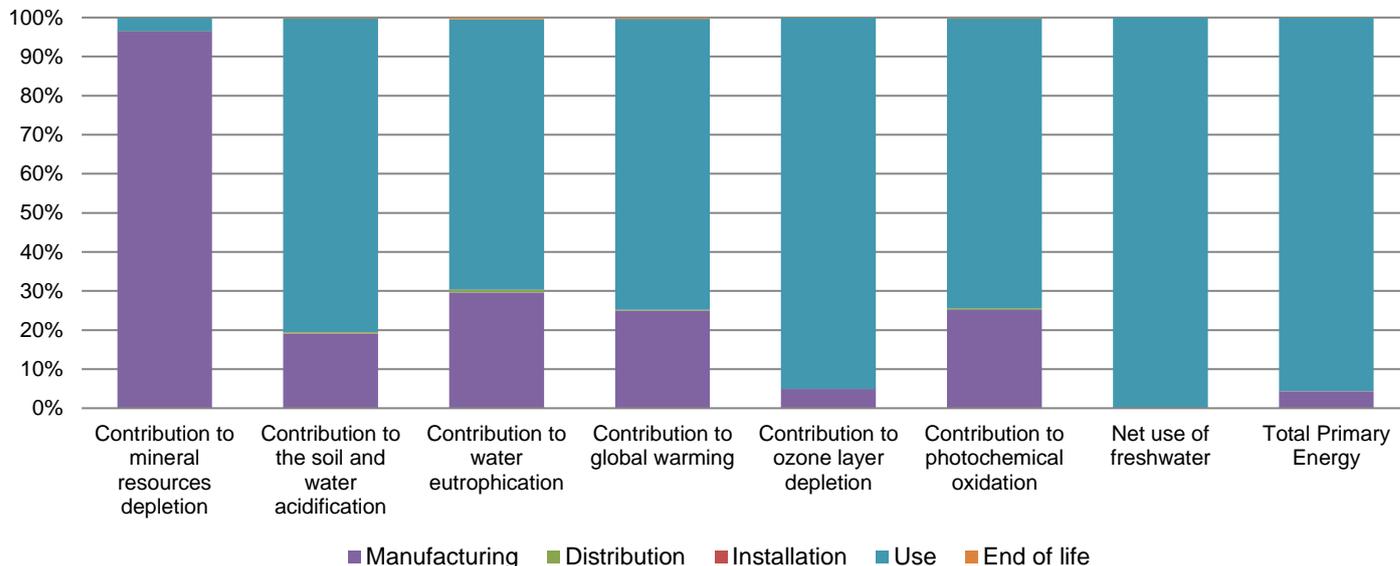

Optional indicators		Thorsman WL 6800lm, 55W, Schuko Soc, USB - IMT47272					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.09E+03	4.17E+02	6.38E+00	6.47E-01	1.67E+03	3.11E+00
Contribution to air pollution	m³	1.18E+04	6.93E+03	1.93E+01	1.99E+00	4.83E+03	2.80E+01
Contribution to water pollution	m³	1.82E+04	1.08E+04	7.47E+01	7.57E+00	7.33E+03	3.77E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	9.76E-01	9.76E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	9.81E+02	2.26E+01	0*	0*	9.59E+02	0*
Total use of non-renewable primary energy resources	MJ	1.29E+04	5.85E+02	6.42E+00	0*	1.23E+04	3.85E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.78E+02	1.99E+01	0*	0*	9.59E+02	0*
Use of renewable primary energy resources used as raw material	MJ	2.75E+00	2.75E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.28E+04	5.40E+02	6.42E+00	0*	1.23E+04	3.85E+00
Use of non renewable primary energy resources used as raw material	MJ	4.51E+01	4.51E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	9.98E+01	9.54E+01	0*	0*	2.73E-01	4.20E+00
Non hazardous waste disposed	kg	3.26E+02	2.96E+01	0*	0*	2.96E+02	0*
Radioactive waste disposed	kg	4.40E+00	2.91E-02	0*	0*	4.38E+00	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.17E+00	3.25E-01	0*	9.17E-01	0*	9.30E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.07E-01	0*	0*	0*	0*	1.07E-01
Exported Energy	MJ	2.91E-03	2.74E-04	0*	2.64E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2022-01 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00825-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH18	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	07/2022	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2016			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2006 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00825-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

07/2022