

PL-LUMINAIRE 9 W, 230 V 230/50 Clear Cover / Product no / SSTL: 43 070 39

43 070 39, PL-LUMINAIRE 9 W Compensated, 230 V, IP 67, RAL-7035


Thanks to its sturdy construction, the luminaire is suited to use in wet areas in industry and sites where there is a large danger of breakage. The globe is of impact-resistant polycarbonate and is mounted with four screws. The housings have 2 aluminum cable gland seals PG 16.

Terminals 2 x 4 mm² + 1 x 2.5 mm². Transparent and opal globe options. The globes are also available painted or with text labels. The colour of the luminaire frame is grey, brown, beige RAL 7032, white 9010, white 9016 or as specified separately by the customer. In addition, we offer models for different voltages and frequencies. Compensated marine models come with nitrile rubber seals and a separate lamp support. Delivered without a light source.

MODEL	4700
VOLTAGE	Max 250 V.
COLOR	RAL-7035, QN-Quality (<i>Brown version 72 492 20</i>)
MARINE MODEL	Yes, with acid resistance screws and compensated
ENCLOSURE CLASS	IP 67 (can be equipped with IP68/IP68K cable glands)
CONNECTORS	Screw terminals
PENTRATIONS	We equip the luminaires with aluminum PG 16 cable gland seals.
TEMPERATURE RANGE	-25 °C - + 70 °C (suitable in very demanding areas)
LAMP SOCKET	G23
LIGHT DISTRIBUTION	IES: & LDT. files. 9W Clear = 240 lm, 9W Opal = 205 lm
COUNTRY OF ORIGIN	FINLAND
CERTIFICATE	FI-Certified
OTHER	Also available with Opal cover and LED-versions



43 070 39

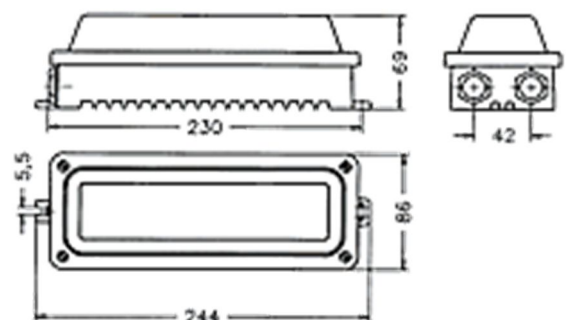

Selcast Oy
 Kilantie 19 (BOX 36)
 10300 KARJAA (10301 KARJAA)
 FINLAND
 +358 19 278 5800
 www.selcast.fi selcast@selcast.fi