

LED-4700, 220-240V 50-60Hz, DC, **RAL-7035**, OPAL Cover

Product no:

43 071 53 3,1W, 220 - 240V, 50-60Hz, DC, IP67

43 071 56 6,3W, 220 - 240V, 50-60Hz, DC, IP67

Thanks to its sturdy construction, the luminaire is suited to use in wet areas in industry and sites where there is a large danger of breakage. The globe is of impact-resistant polycarbonate and is mounted with four screws.


The Light is more energy saving, w/lm is higher. Weight of the luminaire has dropt with 25 % (0,2 kg) referring to the PL-9W light.

Terminals 2 x 4 mm² + 1 x 2.5 mm². OPAL Globe. The globes are also available painted or with text labels. The colour of the luminaire frame is grey, by special order also other colors.

LED **6W 24V DC** and **12V DC 3W**, possibility to make

Shield frame also available.

VOLTAGE	Max 250 V.
COLOR	RAL-7035, QN-Quality
MARINE MODEL	Yes, with acid resistance screws
ENCLOSURE CLASS	IP 67
CONNECTORS	Screw terminals
PENTRATIONS	We equip the luminaires with aluminum PG 16 cable gland seals.
LAMP SOCKET	Inbuilt
WEIGHT	0,74 kg net
LIGHT DISTRIBUTION	IES: & LDT. files. 3,1W = 229 lm, 6,3W = 493 lm
TEMPERATURE RANGE	-25 °C - + 45 °C
COUNTRY OF ORIGIN	FINLAND
CERTIFICATE	FI-Certified
OTHER	Also available with Clear cover and LED-versions

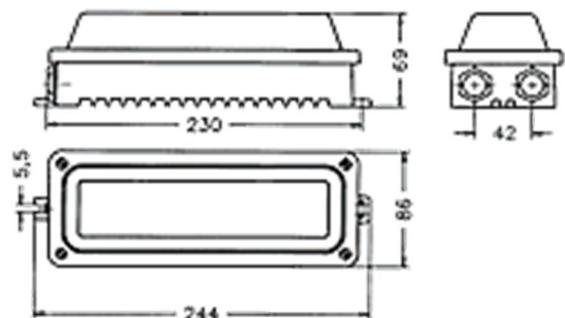

Selcast Oy

Kilantie 19 (BOX 36)
10300 KARJAA (10301 KARJAA)

FINLAND

+358 19 278 5800

www.selcast.fi selcast@selcast.fi