


industrial luminaire for LED light sources

TECHNICAL DATA	Mounting: suspended, on chains (on request), manufacturer does not provide suspension components
	Body: high pressure die-cast aluminum
	Colour: gray
	Diffuser: tempered glass
ELECTRICAL DATA	Power supply efficiency: >95%
	Electrical connection: 3-pole connector
	Power: 220-240V 50/60Hz
	Includes light source: yes
	Type of equipment: ED
OPTICAL DATA	Light distribution: rotationally-asymmetric
	Way of lighting: direct
ADDITIONAL INFO	Lifetime (L80B10): 60 000 h
	Lifetime (TM21 L90B10): 30 000 h
GENERAL DATA	Warranty: 3 years
	Application: warehouses, logistics centers, industrial facilities, sport facilities, roofing




Code	Replacement of conventional technology	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
300092.00067	150W MH (180W)	100°	100	111	14500	13600	123	4000	≥80	-30 ... +35
300092.00052	250W MH (300W)	100°	145	159	21000	19800	125	4000	≥80	-30 ... +40
300092.00051	250W MH (300W)	100°	177	194	25500	23800	123	4000	≥80	-30 ... +40

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
300092.00067	515 345 90	430	40	1	6.5
300092.00052	515 345 90	430	40	1	6.5
300092.00051	515 345 90	430	40	1	6.5

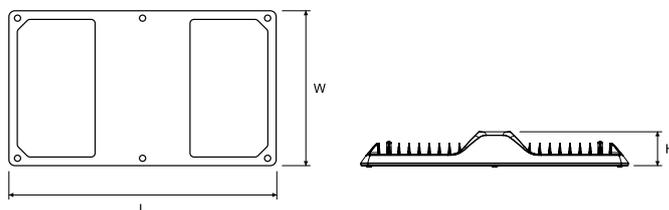

OTHER PICTURES



ACCESSORIES



150020.00821

Adjustable mounting bracket



150020.00824

Bracket for surface mounting

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com