




Wiring Diagram

L	brown	black	Dimmable			
N	blue	white				
⊕ GND	yellow/green	green				
DIM+	blue	brown	purple	white		
DIM-	white	blue	gray	black		

Ledimo Sky

Instruction Manual

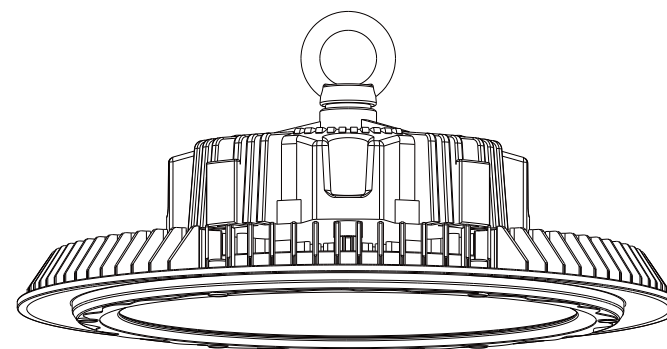

Ledimo Oy

+358456334011

asiakaspalvelu@ledimo.fi

www.ledimo.fi

100W/120W/150W/200W Universal



SAA

IP65



Reminder

We appreciate your purchase!

Please read the instruction manual before installation and keep it for future reference.



Warning

1. To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
3. Please disconnect power before installation or any maintenance of the lamp.
4. Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
5. Please do not dismantle the lamp without the supplier's authorization.
6. Please do not touch the power supply when the lamp is operating.
7. If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.



Application

With unique high-purity die-cast aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and constant voltage power driver, the LED high bay is designed for factories, workshops, warehouses, highway toll stations, gas stations, supermarkets, exhibition halls, stadiums and similar applications.



Technical Parameters




Product Specifications	100W	120W	150W	200W
Input Voltage	AC100~240V / AC100~277V			
Power Frequency	50 / 60Hz			
CRI	Ra70 / Ra80			
Beam Angle	120°,90°,50°			
IP Rating	IP65			
Outlook Dimensions	Ø350 x 159mm			Ø350 x 170mm
Luminaire Net Weight	3.9±0.2kg	4.2±0.2kg		4.8±0.2kg
System Efficacy	130LM/W(CCT=5000K)			
Power Factor	>0.95			
Lifespan	≥50000Hrs(LM70@35°C)			
Working Temperature	-30 ~ +50°C			
Working Humidity	15% ~ 90%RH			
Storing Temperature	-40 ~ +70°C			




Installation Instructions

Loop hanging installation

Physical Dimensions

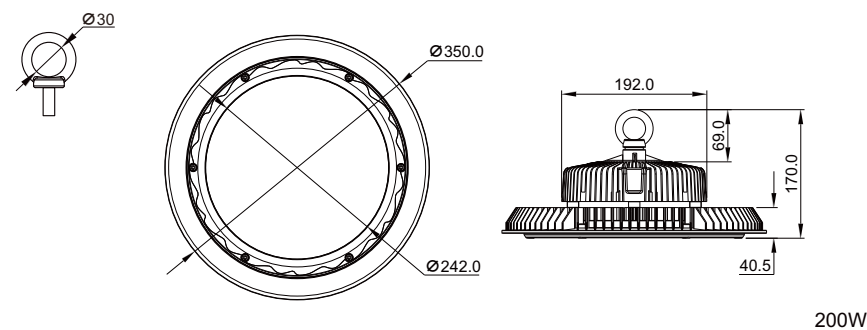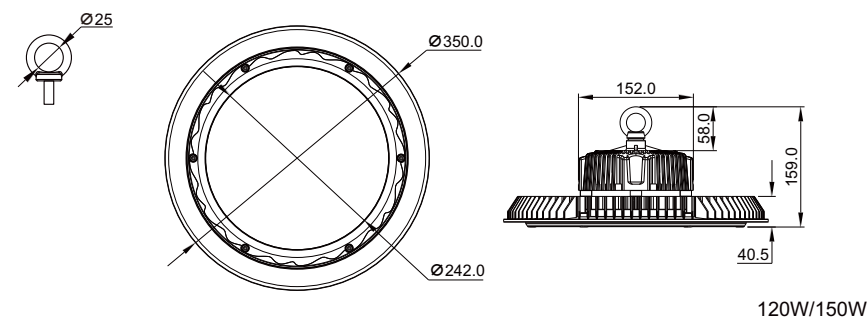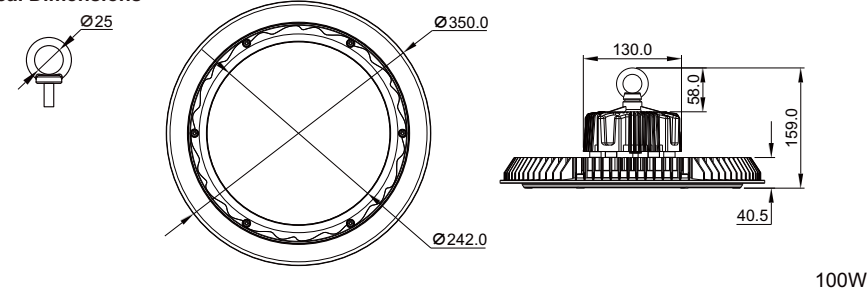

1. ✂

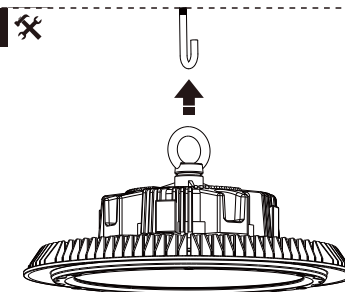

2. ✂

